



Bulkhead Fitting and Spigot Attachment Use and Care Guide

08/2026

Hazard Statements



WARNING
To prevent personal injury.

WARNING
Product should not be used if damage is found.

WARNING
If used for product being consumed, regularly clean following food-safe standards. Properly clean before first use.

Initial Setup

Unboxing: Carefully remove packaging. Avoid using sharp tools that could damage the unit.

- Do not force a box cutter or knife through packaging, as it may damage the product or accessories.
- Ensure you do not damage the product or its components when removing it from the packaging.
- If any damage is present, contact customer service immediately.

NOTE: No tools are required; all parts are hand-assembled.

Cleaning

Disassembly

Step 1 Remove the Spigot

- Rotate the spigot counterclockwise until it is free of the bulkhead fitting threads.
- Separate the spigot from the bulkhead fitting.

Step 2 Remove the Plastic Nut and White Gasket

- On the outside, rotate the plastic nut counterclockwise along the threads of the spigot housing until it is free.
- Remove the plastic nut and the white gasket from the exterior wall of the crisper bin.

Step 3 Remove the Spigot Housing and Black Gasket

- On the inside, remove the bolt and the black gasket.

Three-Sink Method

Wash manually using the three-sink method in the order of wash, rinse, and sanitize.

- **Scrape Dishes:** Scrape dishes to remove food before washing.
- **Wash:** Wash dishes in the first sink with soapy water at least 110°F.
- **Rinse:** Rinse in the second sink with clear, warm water at least 110°F.
- **Sanitize:** Sanitize in the third sink by soaking. For chemical sanitizers, follow the required time, temperature, and dilution. Alternatively, use hot water at 171°F for at least 30 seconds.
- **Air-Dry:** Allow items to air-dry after sanitizing.

Replace Water

Replace the wash water when the suds disappear. Replace any sink's water when it becomes dirty.

Reassembly

Follow the assembly instructions on page 2.

Bulkhead Fitting and Spigot Attachment Use and Care Guide




Assembly

Parts

Included:

- (A) Bolt
- (B) Black Gasket
- (C) White Gasket
- (D) Plastic Nut
- (E) Spigot

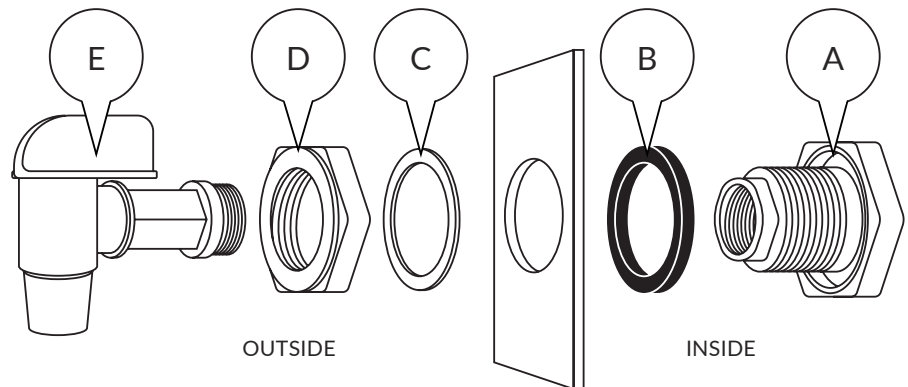

Step 1


Install Spigot Housing and Black Gasket

- Install the bolt (A) and black gasket (B) on the inside of the bottom bin, with the black gasket positioned over the bolt.

Step 2

Install White Gasket and Plastic Nut

- On the outside, install the white gasket (C) and the plastic nut (D), with the white gasket sandwiched between the plastic nut and the exterior wall of the crisper bin.
- Rotate the plastic nut (D) clockwise via the threads of the spigot housing bolt (A) until firmly secure.

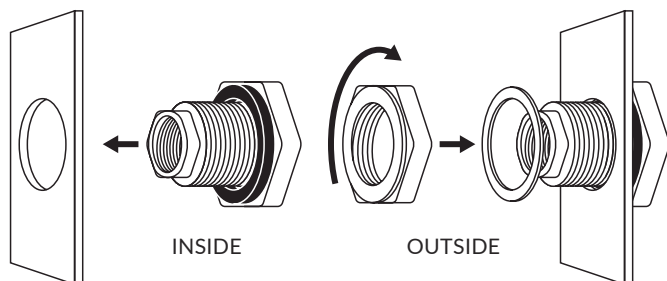

Step 3

Install the Spigot

- Install the spigot (E) by aligning the spigot threads with the bulkhead fitting threads.
- Rotate clockwise until firmly secure.

