

*Proposed new Rechargeable Battery
to replace 170mAhr Btt.*

MH-200N7 Specification


NiMH Cylindrical Battery

Size: 6F22

Typical Characteristics


Model: MH-200N7		
Specifications		
Nominal Voltage (V)		8.4V
Capacity	Typical (mAh)	220mAh
	Minimum (mAh)	200mAh
Dimension	Height:	Max. 48.5mm
	Width:	Max. 26.5mm
	Thickness:	Max. 17.0mm
Charging	Standard	20mA(0.1C _s) x 16 hrs
	Rapid	200mA(1C _s) x 1.2 hrs -ΔV = 70mV
	Trickle	6-10mA
Operating Temperature (°C)	Standard Charging	0 ~ 45°C
	Rapid Charging	10 ~ 45°C
	Discharging	-20 ~ 60°C
	Storage	-20 ~ 35°C
Service Life		>500 cycles (IEC standard)
Weight		Approx. 50.5g
Cuff-off Voltage (V)		7.00

Unit: mm





Max. 17.0

Max. 26.5



Max. 48.5

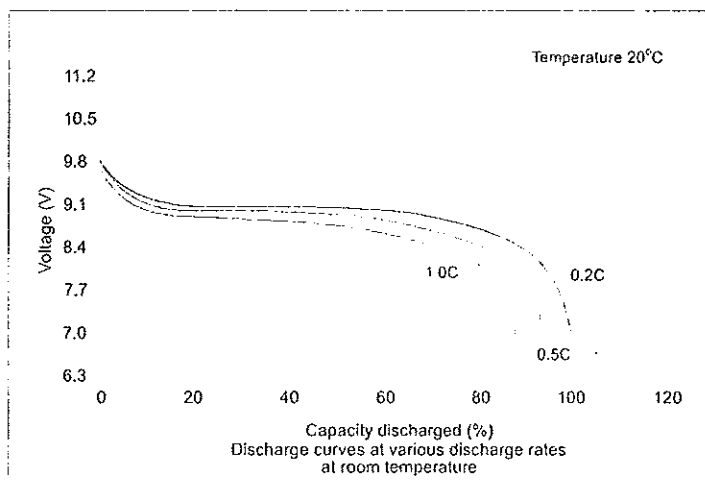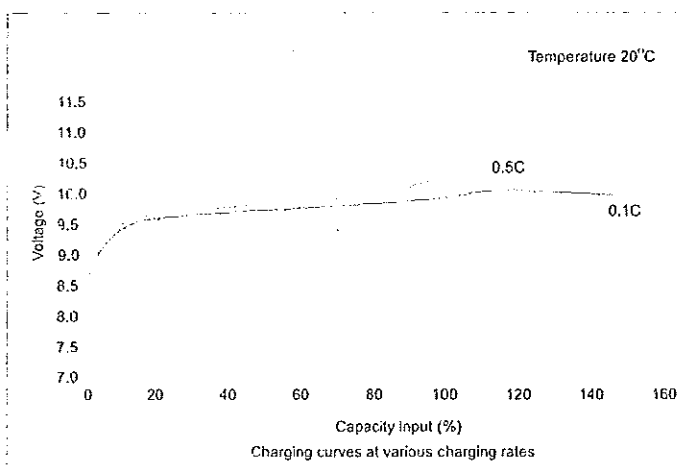

**Note: The data in this document are for descriptive purposes only and subject to change without prior notice.