T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.


BP-TMV-38C-CBT

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

[5 1/4" 134mm]

This Space for Architect/Engineer Approval						
Job Name	Date					
Model Specified	Quantity					
Customer/Wholesaler						
Contractor						
Architect/Engineer						

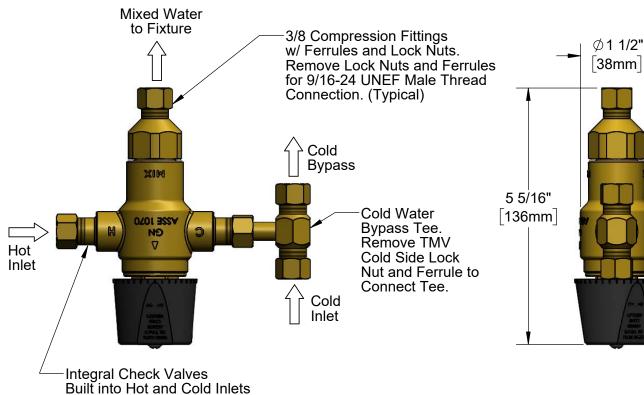

Locking Adjustment Knob Prevents Water from Exceeding Customer's Maximum Temperature Set Point.

Valve is Factory Pre-set to Deliver Mixed Water Temperature of Approximately 100°F (38°C) Max.

Performance Rating:

Minimum Flow Rate: 0.35 GPM

(Included)

Pressure Drop at Minimum Flow Rate: 0.5 psi

Maximum Pressure: 125 psi

Hot Water Inlet Temperature Range: 120~180 °F (49~82 °C)

Outlet Temperature Range: 80~120°F (27~49°C)

Check Valve Filter Screens

Outlet Temperature Factory Setting: Approx. 100°F (38°C)

Product Specifications:

Thermostatic Mixing Valve with 3/8" Compression Fittings

and Cold Water Bypass Tee

Product Compliance:

NSF 61 - Section 9

NSF 372 (Low Lead Content) ASSE 1070 (TMV)

Drawn: **GEF** Checked: JRM Approved: JHB Date: 04/08/22 Scale: 1:2 Sheet: 1 of 2

T&S BRASS AND BRONZE WORKS, INC. ² Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690


Model No.

BP-TMV-38C-CBT

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

ITEM NO.	SALES NO.	DESCRIPTION				
1	BP-TMV-38C	3/8" Compression TMV				
2	020862-45	Bypass Tee, 3/8" Compression				

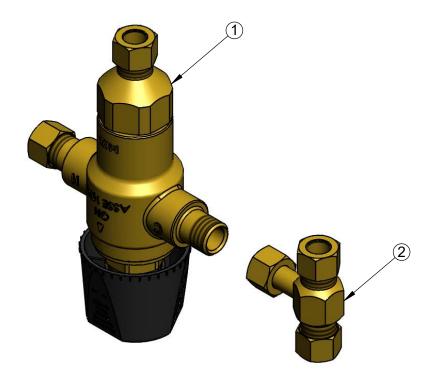

Product Specifications:

Thermostatic Mixing Valve with 3/8" Compression Fittings and Cold Water Bypass Tee

Product Compliance:

NSF 61 - Section 9 NSF 372 (Low Lead Content) ASSE 1070 (TMV)

Drawn:	GEF	Checked:	JRM	Approved:	JHB	Date:	04/08/22	Scale:	NTS	Sheet: 2 of 2