



FIT XL

The Fit XL high-speed oven features a 16-inch chamber and is designed to efficiently finalize refrigerated, fresh, or frozen foods, such as breakfast sandwiches, chicken wings, muffins, lasagnas, mac & cheese, sub sandwiches, and other partially prepared dishes. Capable of handling larger portions, it is ideal for medium and large businesses. The FIT XL delivers excellent flavor, appearance, and crispiness. By combining impinged air and microwaves, it heats, browns, and toasts foods faster than traditional methods.



FIT XL BLACK
SKU: 990200




FIT XL SILVER
SKU: 990179



- 16-inch chamber.
- Capable of handling larger portions, it is ideal for medium and large businesses.
- Stores unlimited recipes with up to 8 steps each, divided into 16 groups.
- USB port for system updates and importing/exporting groups, recipes, and settings.
- Wi-Fi capabilities, enabling remote management for system updates and importing/exporting groups, recipes, and settings via the IOK online platform.
- Adjustable temperature from 86°F (30°C) to 536°F (280°C).
- Independent control of impinged air (high-speed air blast) and microwaves.
- User-friendly touchscreen panel.
- Constructed from stainless steel.
- Certified Ventless – no need for vent hoods. Easy-to-remove catalytic converter for hassle-free cleaning.
- Additional functionalities: Test Mode and Favorites.
- Daily cleaning guide with explanatory videos displayed on the screen, demonstrating the step-by-step process.
- Warranty: one (1) year covering manufacturer defects, part failures, and pre-approved labor, and two (2) years on all the heating elements, magnetrons, and blower motor of the oven.

Prática

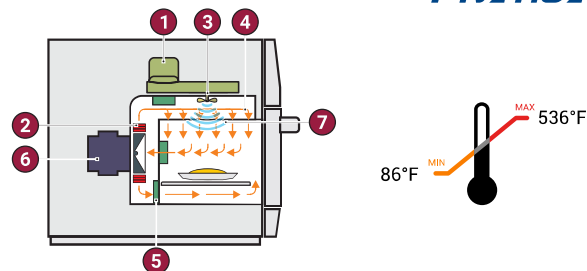

- | | |
|--------------------------|------------------------|
| 1. Magnetron | 5. Catalytic Converter |
| 2. Resistance (infrared) | 6. Blower Motor |
| 3. Stirrer | 7. Microwaves |
| 4. Impinged Air | |

COOK TIMES

16" Frozen Pizza	3 min 30 sec
3 Sub Sandwiches 16"	50 sec
6 Paninis	1 min 30 sec
5.5 lb Frozen Chicken Wings	5 min
2 lb Frozen Fries	4 min 30 sec




CERTIFIED
VENTLESS
WITH EASILY REMOVABLE
CATALYTIC CONVERTER.

[CLICK HERE](#)
LEARN MORE

[CLICK HERE](#)
WATCH THE VIDEO

[CLICK HERE](#)
CAD AND REVIT FILES

STANDARD ACCESSORIES

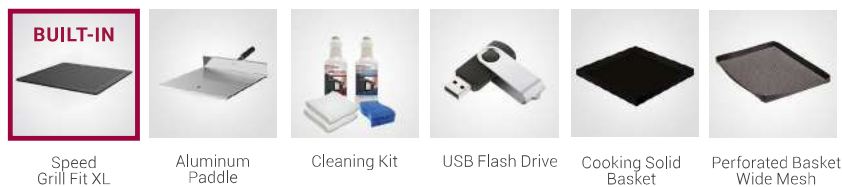

Region	Voltage (V)	Phases	Freq. (Hz)	Power (kW)	Circuit Breaker (A)	Cable	Socket	Product dimensions (Height x Width x Depth)	Boxed product dimensions (Height x Width x Depth)	Chamber dimensions (Height x Width x Depth)	Clearance (Left / back / right side)
USA / Canada	208 240	Single	60	6.2 7.2	30	3x10 AWG	NEMA 6-30	24.5 x 19.2 x 31.3 (") 180.7 lbs.	35.8 x 23.2 x 37.8 (") 103 lbs	5.2 x 16.4 x 16.1 (") 0.80 cu.ft	0" / 0" / 0"