
C2410C EZ-FIT® CUP DISPENSER INSTALLATION INSTRUCTIONS

1. CUT HOLE IN COUNTER SURFACE




- 2. REMOVE TRIM RING TURNING COUNTER CLOCKWISE
- 3. SECURE CUP DISPENSER TO COUNTER WITH SUPPLIED SCREWS

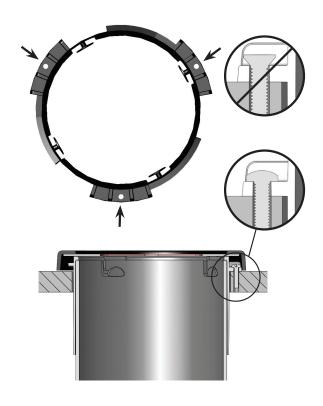

4. SELECT PROPER SIZE GASKET FOR CUP (SEE TABLE ON BACK)


5. INSTALL GASKET OVER POSTS IN UNDERSIDE OF RING

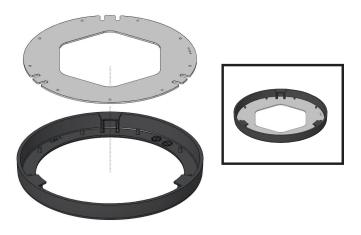

6. REPLACE COVER RING WITH GASKET BY TURNING CLOCKWISE OVER MOUNTING RING UNTIL SECURE



7. LOAD CUPS THROUGH GASKET




REPLACEMENT PARTS & ACCESSORIES (see reverse side for replacement gaskets)

GASKET SIZING GUIDE

				RE	EPLACEMENT GA	SKET KITS
Approximate Cup Rim Diameter		Approximate Cup Size Range	Gasket Size	Part Numbers		Quantity of Gaskets in Kit
minimum	maximum			black	white	
2 7/8" (73mm)	3 1/8" (79mm)	8 oz (236mL) to 14 oz (414mL)	SMALL	XC2422SBK	XC2422S	3
3 1/2" (89mm)	3 7/8" (98mm)	16 oz (474mL) to 24 oz (710mL)	MEDIUM	XC2422MBK	XC2422M	3
4 3/16" (106mm)	4 3/8" (111mm)	32 oz (947mL)	LARGE	XC2422LBK	XC2422L	3
4 1/2" (114mm)	4 3/4" (121mm)	32 oz (947mL) to 46 oz (1360mL)	EXTRA LARGE	XC2422XLBK	XC2422XL	3
					XC2426 One each- Small.	4


HOW TO DETERMINE WHICH GASKET TO USE

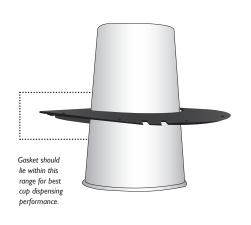

- I. Turn cup upside down.
- 2. Affix gasket over cup. Gasket should rest about 2/3 of the way down from rim of cup.
- 3. When gasket fits appropriately, this indicates the correct gasket size to use.

SMALL GROUPING OF HOLES ON EDGE INDICATE GASKET SIZE (SEE CHART)

Medium, Large, Extra Large

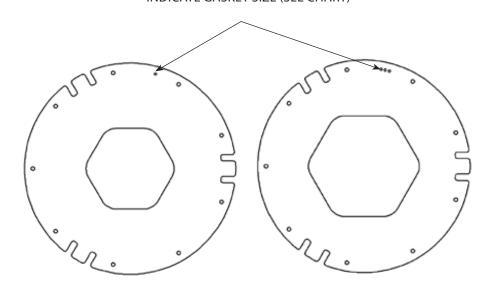

# OF HOLES	GASKET SIZE	PART #
0	SMALL	XC2422S/XC2422SBK
0 0	MEDIUM	XC2422M/XC2422MBK
0 0 0	LARGE	XC2422L/XC2422LBK
0 0 0 0	EXTRA LARGE	XC2422XL/XC2422XLBK

canada@sjcr.com

mexico@sjcr.com