

## NEED HELP?

Call or Email us first

Our service team is ready to answer your questions...

1-800-265-1833 (English) / 1-800-567-2513 (French)

IN CANADA - ressalesscanada@canarmna.ca - IN USA - ressalessusa@canarmna.ca

Monday – Friday  
8 AM - 5 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS  
READ ALL INSTRUCTIONS

## IMPORTANT SAFETY INSTRUCTIONS

### SAVE THESE INSTRUCTIONS

## TOOLS AND MATERIALS REQUIRED:



Phillips  
Screwdriver



Wire Cutters



Pliers



Wrench


Wiring supplies  
as required by  
local electrical  
code

## SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. TO CLEAN THE FIXTURE, TURN OFF THE POWER, WAIT FOR IT TO COOL, AND WIPE THE FIXTURE WITH A CLEAN, SOFT CLOTH.

**NOTE:** Product may not look exactly as shown in figures.

## INSTALLATION:

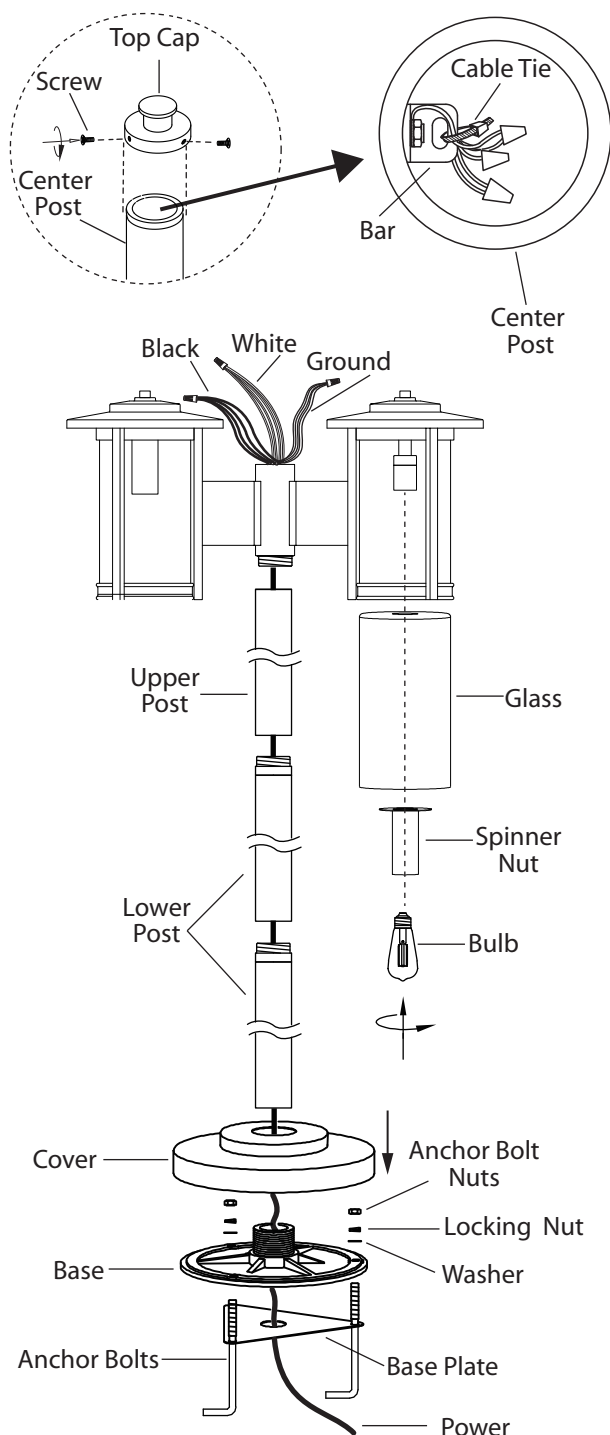

1. Pour cement base for the lamp.

2. Place anchor bolts into the cement with the base plate sitting on top of the cement holding the bolts in proper position. Make sure the anchor bolts are above the cement sufficiently to clear through the base when assembled. Make sure the power supply passes through the center hole of the base plate. (Note: make sure the surface of the cement is level). After the cement is cured, proceed with the next step.

3. Feed the power leads up through the base and bolt the base to the anchor bolts using washers, locking nuts and anchor bolt nuts.

4. Unscrew the 3 screws to remove the top cap.

5. Feed the power supply through the cover, lower posts and upper post. Feed power supply through the cable tie. Tighten the cable tie so that the power supply tightens against the bar.

6. Connect the power supply to the head assembly. Attach the black wire to the black wire. Attach the white wire to the white wire. Ground wire from power supply should be attached to ground wire from bar inside the head assembly.

7. Once connections of wires are completed, carefully tuck wires and wire nuts into the center post. Making sure no bare wire (on the black and white) is visible at the wire nuts.

8. Secure the top cap with the 3 screws.

9. Screw the upper post into the head assembly (be careful not to twist the wires).

10. Screw the lower posts into the upper post.

11. Position the cover in place.

12. Screw the assembled pieces (lower posts, upper post & head assembly) onto the base.

13. Remove spinner nut from socket. Position the glass on lamp and secure with spinner nut.

14. Install the proper bulb type and wattage.