

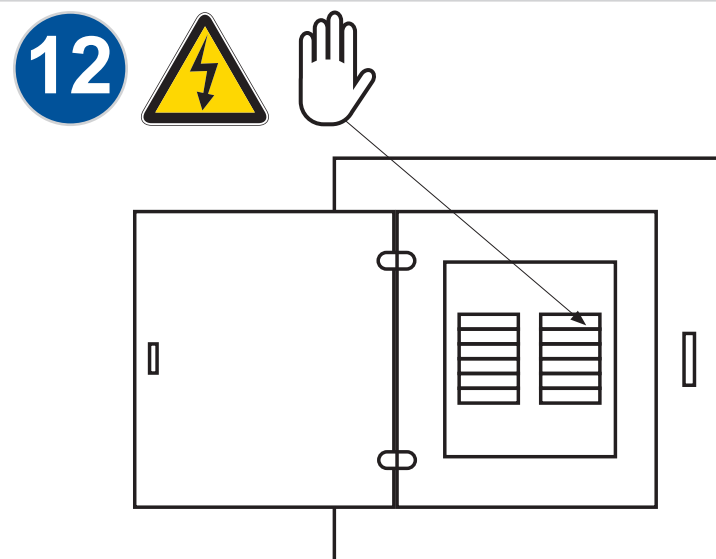
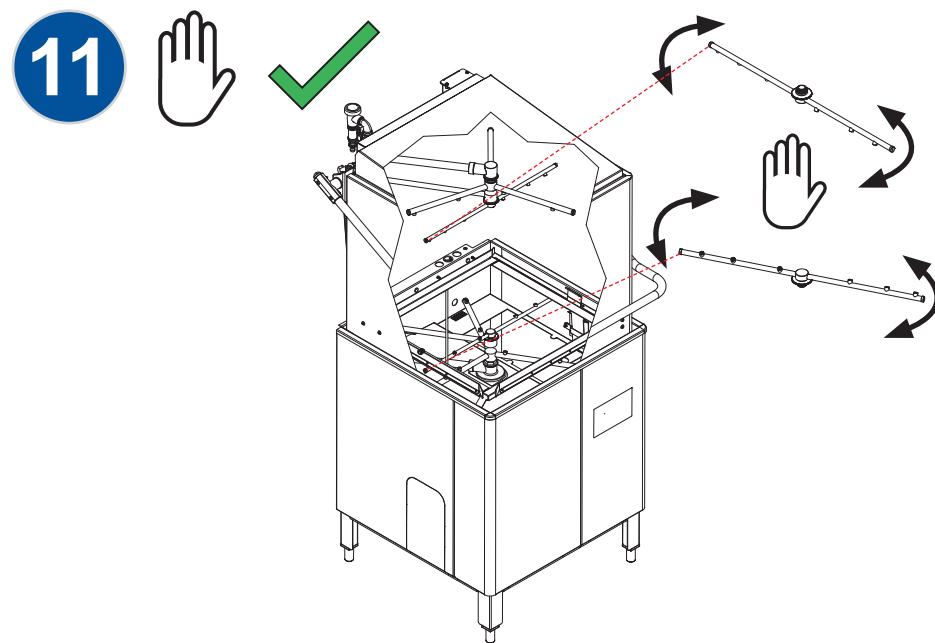
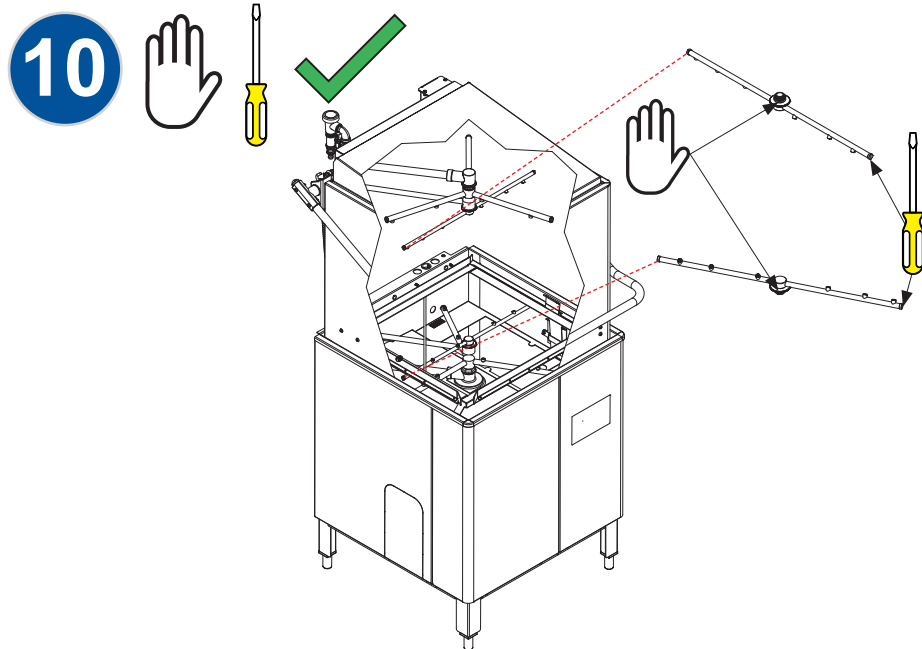
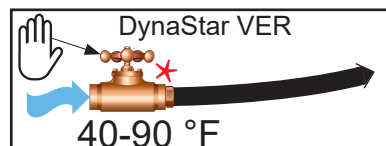


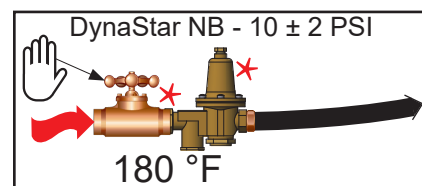


13  

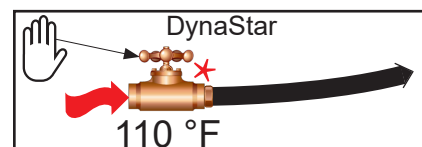

DynaStar & DynaStar VER
15–65 PSI

If > than 65 PSI, use:
Si > que 65 PSI, utilice:
Si > de 65 PSI, utilisez:



For Technical Support, call the number below.

For the DynaStar® Series Manual, scan the
QR Code below or go to our website.



1.888.800.5672
www.jacksonwss.com

Jackson®

Warewashing Systems

INSTALLATION QUICK GUIDE

DYNASTAR® SERIES



 = risk of electric shock
riesgo de electrocución
risque de décharge électrique

 = caustic chemicals
químicos cáusticos
produits chimiques caustiques

 = ground wire
cable a tierra
fil de terre

 = verify
verificar
vérifier

 = use fingers/hands
utilizar los dedos/manos
utilisez vos doigts/mains

 = use eyes
utiliza tus ojos
utilisez vos yeux

 = reference data plate
mire la placa de datos
regardez la plaque signalétique

 = water
agua
eau

 = not supplied
no se suministra
non fourni

 = level
nivel
niveau

