
## Steel Can Lid


**ASSEMBLY INSTRUCTIONS** 



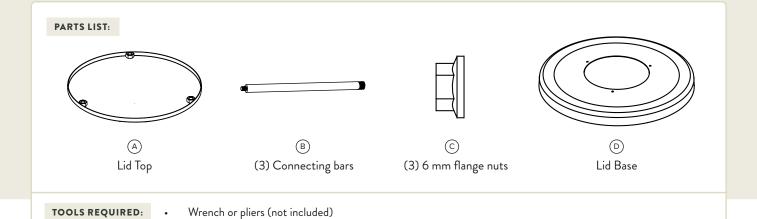


## STEP 1

Placing the lid top upside down on a flat surface, screw the three connecting bars into the three holes in the lid top by rotating clockwise.



## STEP 2

Turn the lid base upside down and line up the three holes with the three connecting bars. Carefully insert the connecting bars into the lid base by rotating clockwise.



## STEP 3

Take the (3) 6 mm flange nuts and hand-screw each nut onto the exposed end of the connecting bar. Use a wrench or a pair of pliers (not included) to tighten the flange nuts.

