


Surface Mounting Kit

ASSEMBLY INSTRUCTIONS




LANCASTER™
TABLE & SEATING

PARTS LIST:

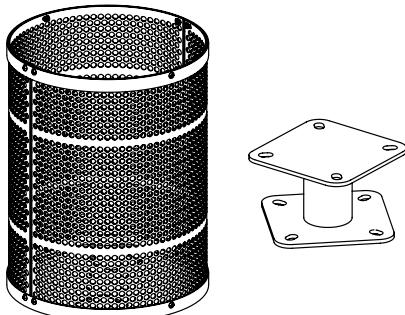

(A) (1) In-ground mounting kit
(mounting bracket and pole)

HARDWARE:



(B) (4) 8 mm x 20 mm
hex head screws



(C) (8) 8 mm flat
washers



(D) (4) 8 m
hex nuts

TOOLS REQUIRED:


- Wrench (not included)
- Impact drill (not included)
- Shovel or auger (not included)
- Hammer (not included)

STEP 1

Before beginning the mounting process, ensure you have all necessary parts and tools.

STEP 2

With your Lancaster Table & Seating perforated trash can sat on its side on a flat surface, line up the four pre-drilled holes of the mounting bracket with those on the bottom of the trash can. Insert a washer (C) onto each hex head screw (B) before inserting into each of the four holes on the bottom interior of the can, through the corresponding holes in the mounting bracket. Place a washer and then a hex nut (D) on the exposed end of each hex head screw on the other side of the mounting bracket, using a wrench (not included) to tighten.

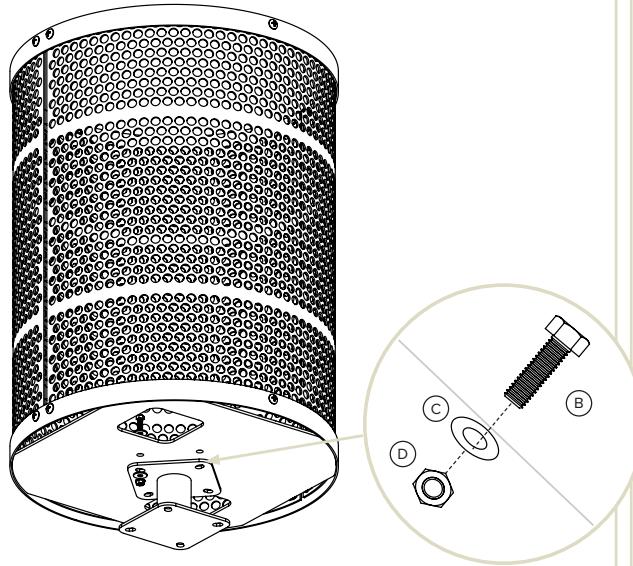


STEP 3

Once the surface mount kit is firmly connected to your trash can, secure the bottom mounting bracket to a hard ground surface, such as asphalt or concrete, using the four M10 expansion screws (E), plus an impact drill (not included) and a hammer (optional).

STEP 4

To do so, first choose your desired mounting location for your Lancaster Table & Seating slatted steel trash can. Using the bottom of the mounting kit, mark your four hole locations on the ground.

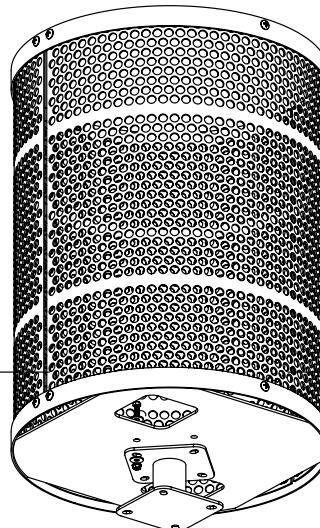

Surface Mounting Kit



ASSEMBLY INSTRUCTIONS



LANCASTER™
TABLE & SEATING


STEP 5

Using a 1/2" concrete drill bit (not included), drill holes in the marked locations approximately 2 3/8" deep. Make sure the expansion screws each have a washer and a nut attached. After all holes are drilled, insert an expansion screw into each hole. You may need to use a hammer (not included) to tap the screw into the ground. A portion of the screw should still be above the ground.




STEP 6

Using a wrench (not included), tighten the hex nut on each expansion screw by rotating it in a clockwise motion. This step allows the screw to expand completely in the ground.

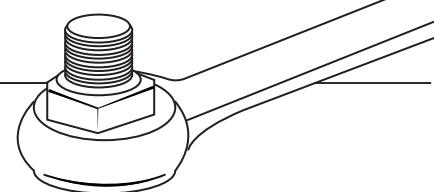

STEP 7

Remove the hex nut and washer from each expansion screw by rotating the wrench in the opposite direction as before. Carefully line up the bottom of the surface mounting kit with the exposed tops of the four expansion screws and lower the mounting kit onto the screws. Once the trash can and mounting kit are in the desired position, place a washer and a hex nut on each of the expansion screws and use a wrench to tighten each nut again.

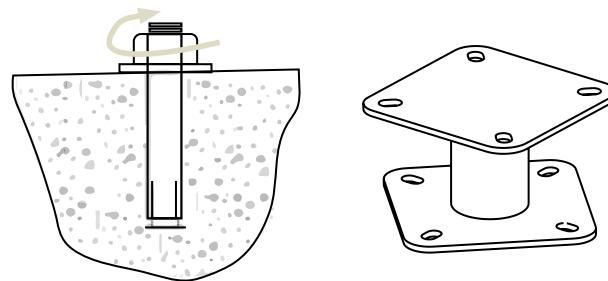

STEP 8

You may now insert your trash can liner and attach your trash can lid. Your trash can is now firmly mounted to the ground.

