

OPERATING AND MAINTENANCE INSTRUCTIONS

(Read the entire sheet carefully and retain for future reference)

LADDER INSPECTION


- Upon receipt, inspect each unit immediately for damage incurred during shipping. If damage has occurred, sign for ladder as DAMAGED, contact the freight carrier and the manufacturer immediately. DO NOT USE LADDER.
- Inspect all ladders prior to each use, any ladders damaged or weakened from any cause SHALL NOT BE USED until repaired or replaced. Ladders damaged or worn beyond repair shall be destroyed. NEVER climb a damaged ladder.
- If assembly is required ensure all bracing is properly fitted.
- Ensure that all rubber tips are installed on all legs. Replace all tips that are worn.
- Check brake mechanism. All legs must rest firmly on the floor before climbing.
- Ensure all fasteners are properly tightened.
- Missing or worn labels must be replaced, please contact the manufacturer.

LADDER USE

- All employees shall be instructed by employer in the proper use of the unit, and shall read the operating instructions before being allowed to use any unit.
- Employees must read and obey all instruction labels attached to the unit.
- Units must not be loaded beyond the weight marked on the label.
- The user shall face the ladder and use the handrail when ascending or descending. Overreaching while on a unit could cause instability and result in a fall.
- Additional height shall not be gained by the addition of any type of extension or object being placed on the unit.
- Do not stand on railing or top guardrail. The user shall not ascend farther than the top step.
- Foreign material such as grease shall be removed from shoes prior to ascent of a unit.
- Access to or egress from any step or platform from any other elevated surface shall be prohibited unless the unit has been positively secured against any movement.
- DO NOT USE ladder when occupied.
- DO NOT USE near open electrical circuits, contact with an energized circuit or conductor will cause an electrical shock.
- DO NOT USE in front of a door unless the door is secured in an open position, locked or guarded.
- DO NOT USE on an uneven or sloping surface, units are to be used on a flat level surface.
- DO NOT USE if you tire easily, are subject to fainting spells, use medicine, alcohol, or are physically handicapped.



Mobile Ladder Stand Assembly Instructions for 5-16 step standard incline (SR) models

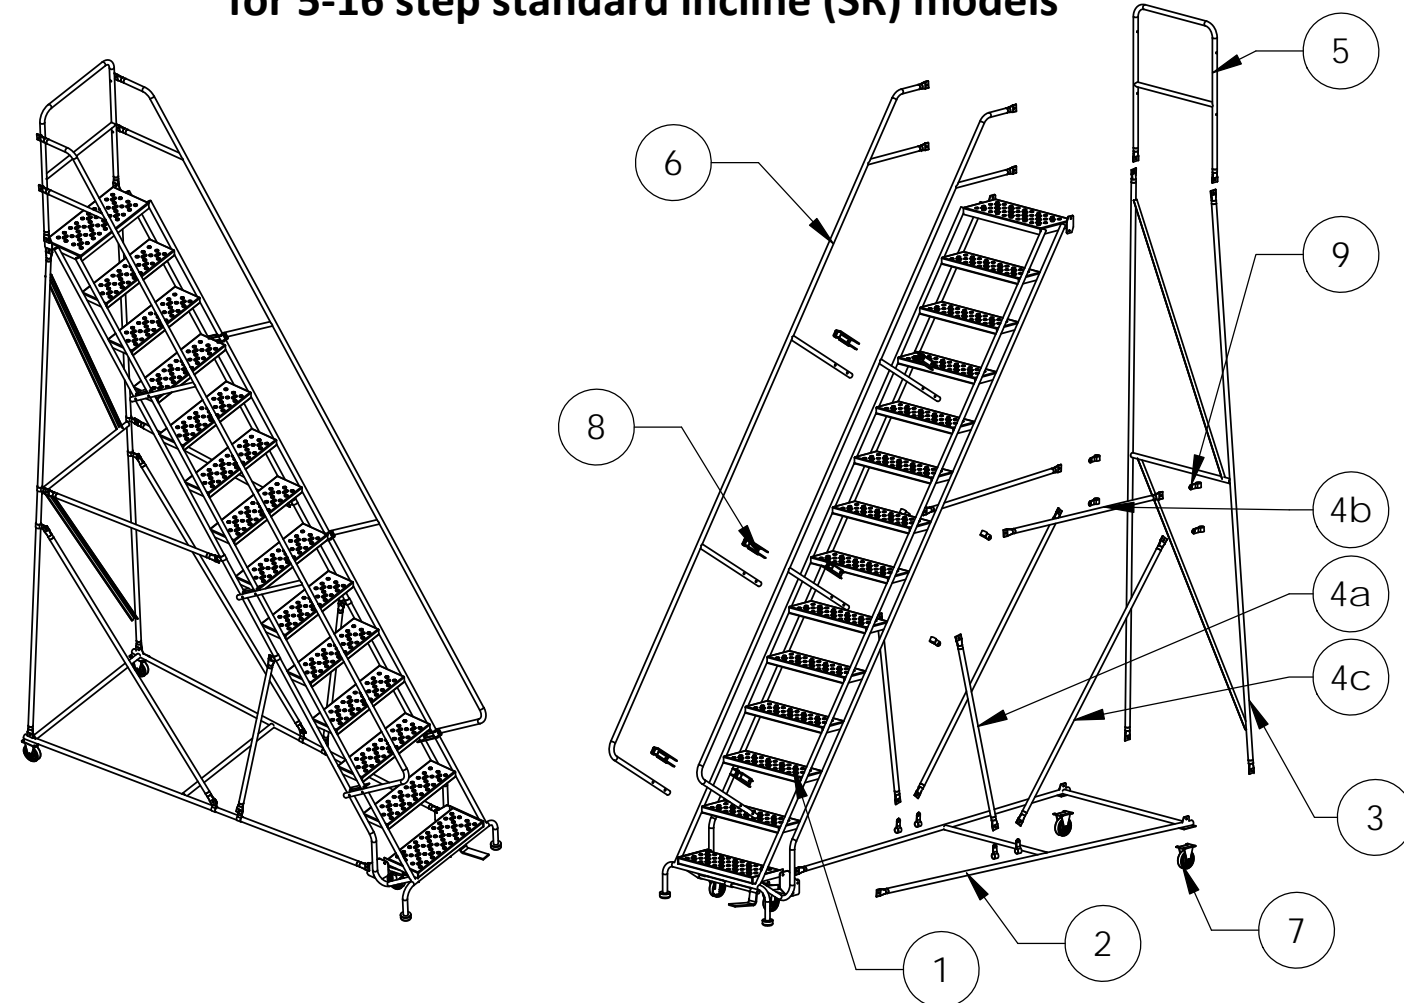

PART #	COMPONENTS						DESCRIPTION
	5-7 STEP	8 STEP	9-10 STEP	11 STEP	12-13 STEP	14 - 16 STEP	
1	1	1	1	1	1	1	STRINGER ASSEMBLY
2	1	1	1	1	1	1	BOTTOM ASSEMBLY (ATTACHED)
3	1	1	1	1	1	1	BACK ASSEMBLY (ATTACHED)
4a	0	2	2	2	2	2	SUPPORT TUBE A
4b	0	0	2	2	2	2	SUPPORT TUBE B
4c	0	0	0	0	2	2	SUPPORT TUBE C
5	1	1	1	1	1	1	GUARDRAIL
6	2	2	2	2	2	2	HANDRAIL
7	2	2	2	2	2	2	CASTERS
8	2	4	4	4	6	6	HANDRAIL CLAMP
9	0	4	8	8	12	12	SUPPORT TUBE CLAMP
	1	1	1	1	1	1	FASTENER PACK


LADDERS USED IN CALIFORNIA MUST BE EQUIPPED WITH CAL-OSHA KIT	
LADDER	CAL-OSHA KIT PART NUMBER
5-9 STEP LADDER	GRCAL0509
10-12 STEP LADDER	GRCAL1012
13-15 STEP LADDER	GRCAL1315
16 STEP LADDER	GRCAL16

* TOOLS REQUIRED - UTILITY KNIFE, 1/2" SOCKET WRENCH, & OPEN END WRENCH





800-565-2165
www.tri-arc.com

1. If you purchased a specialty ladder (ie Deep Top, All Directional, Stock Picking, etc.), be sure to read ALL instruction packets prior to any assembly.
2. Place the stringer on a firm working surface, laying on its side. The back and bottom assemblies ship fastened to the stringer but are folded flat.
3. Pivot the back and bottom assemblies until their connection holes align. Connect using a $5/16"$ x $3/4"$ fastener for standard round tube models, or a $5/16"$ x $1-1/2"$ fastener for safety angle models.


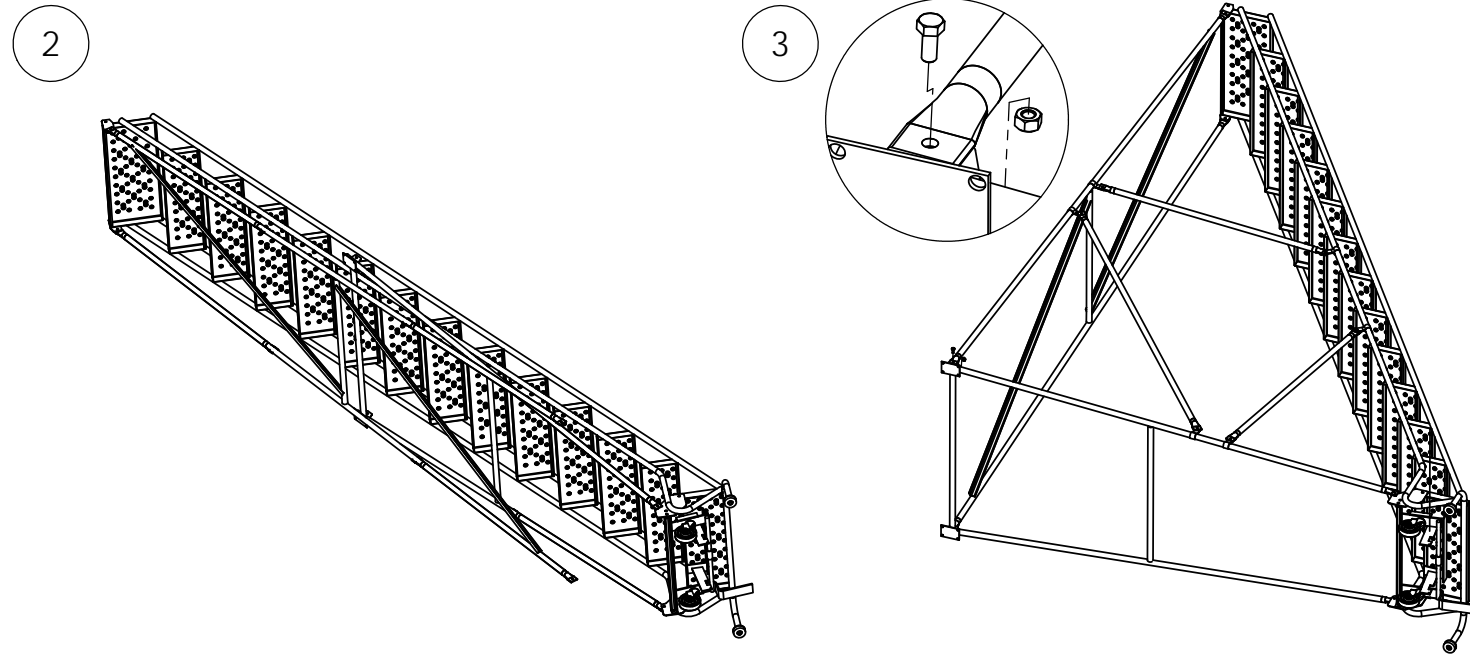


4. Install support tubes as shown below. Ladders with 7 or fewer steps will not have any support tubes, and can skip this step. Support tubes are connected to the tubing clamps using hand tightened $5/16"$ x $3/4"$ fasteners. Detailed figures below show examples of how the support tubes attach to the clamps.

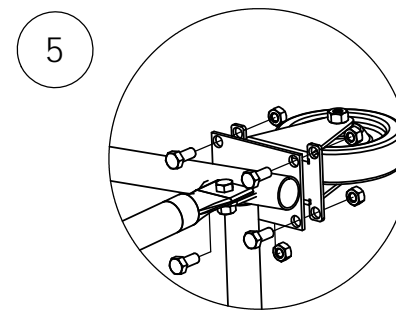
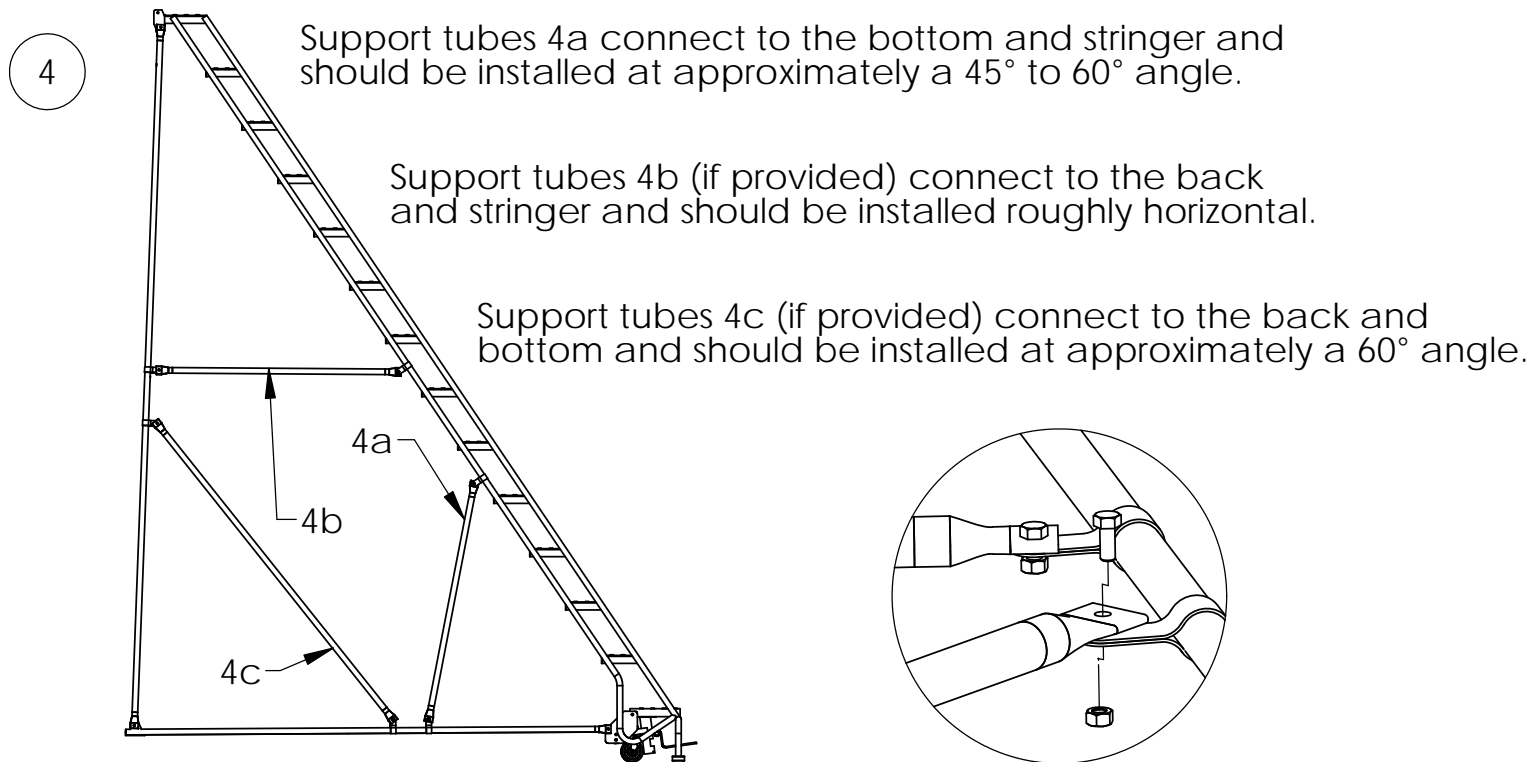


5. Attach casters to the bottom assembly using $5/16"$ x $3/4"$ fasteners.

6. Attach the top guardrail to the stringer assembly using $5/16"$ x $3/4"$ fasteners.

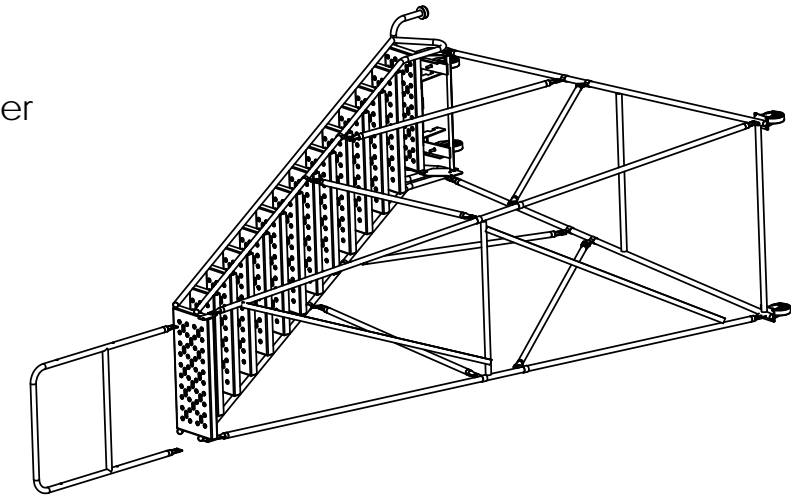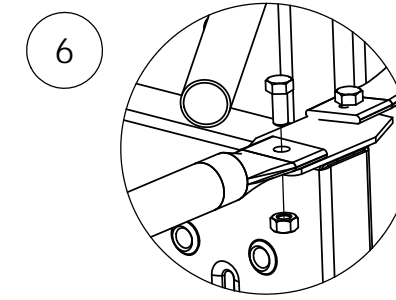

7. Attach the handrails to holes on the outside of the guardrail (see inset below), using $5/16"$ x $1-1/2"$ bolts.

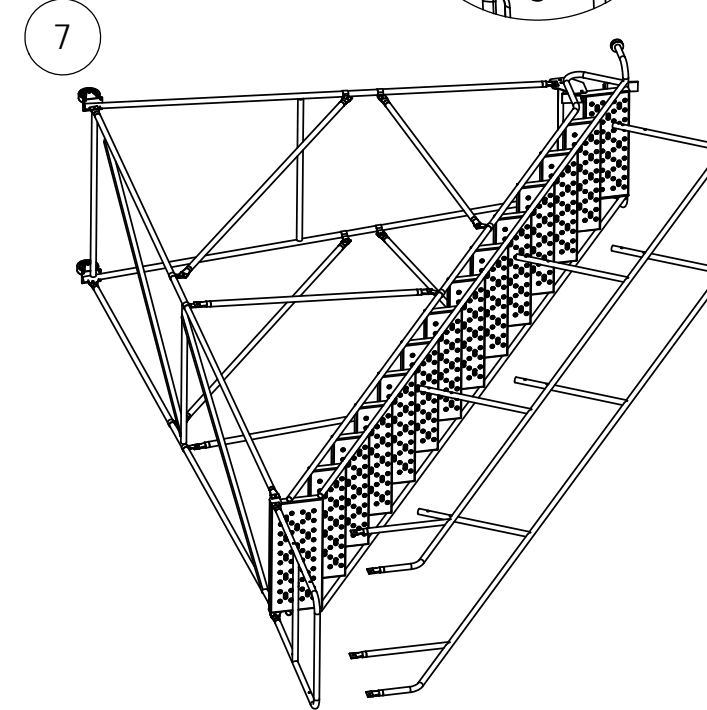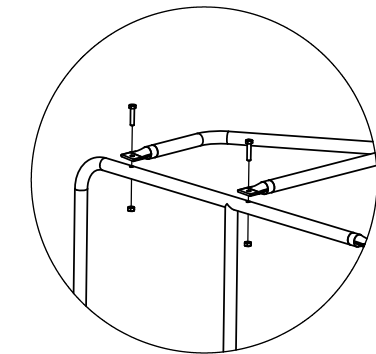

8. Attach the handrail posts to the stringer using handrail clamps and $5/16"$ x $1-3/4"$ fasteners as shown at the left.
9. Tighten the fasteners under the top step before standing the ladder upright.
10. Stand the ladder upright. Be sure to tighten all fasteners completely, including any that were only hand-tightened earlier.

