

SANI-LAV[®] COLUMBIA PRODUCTS

Mid-Sized Industrial Nozzles with Aluminum Body N1A Series



Model N1A
Model N1AX



Model N1AB
Model N1ABX



Model N1AW
Model N1AWX



Model N1AR
Model N1ARX



Model N1AY
Model N1AYX

Also available with brass and stainless steel main bodies.
Models N1 and N1SS



N1A Series Universal Features

Model	Color	Inlet	Material	Max PSI	Max Temp.	GPM @ 100 PSI	Weight	Includes
N1A	Safety Orange	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	5.0	1.0 lbs.	—
N1AB	Black	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	5.0	1.0 lbs.	—
N1AW	White	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	5.0	1.0 lbs.	—
N1AY	Yellow	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	5.0	1.0 lbs.	—
N1AR	Red	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	5.0	1.0 lbs.	—
N1AX	Safety Orange	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	Low Flow 3.3	1.0 lbs.	—
N1ABX	Black	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	Low Flow 3.3	1.0 lbs.	—
N1AWX	White	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	Low Flow 3.3	1.0 lbs.	—
N1AYX	Yellow	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	Low Flow 3.3	1.0 lbs.	—
N1ARX	Red	3/4" GHT	Aluminum, EPDM Cover	150	200°F/93°C	Low Flow 3.3	1.0 lbs.	—

Quick Specs


Max Temperature	200°F/93°C
Max Pressure	150 psi
Inlet	3/4" Female GHT allows direct hose connection
Tip	Not Threaded
Body Material	Aluminum
Components	Brass and stainless steel
Cover Material	Insulated rubber with yellow arrow directions
Handle Type	Stainless steel
Trigger	Safety shut off when released
Hose Adapter	Model N17 (Sold Separately)
Weight	1.0 lbs.
Dimensions	L 5.22" x H 5.24" x W 1.81"

Water Flow Rate Comparison

PSI	Standard GPM	Low-flow GPM	Water Saving %
20	2.1	1.4	33%
30	2.6	1.8	31%
40	3.0	2.0	33%
50	3.5	2.1	40%
60	3.8	2.4	37%
70	4.1	2.7	34%
80	4.3	3.0	30%
90	4.8	3.2	33%
100	5.0	3.3	34%
110	5.3	3.6	32%
120	5.5	3.7	33%
130	5.7	3.9	32%
140	6.0	4.1	32%
150	6.3	4.3	32%



Variable Spray Nozzle – trigger lever controls variable spray patern.

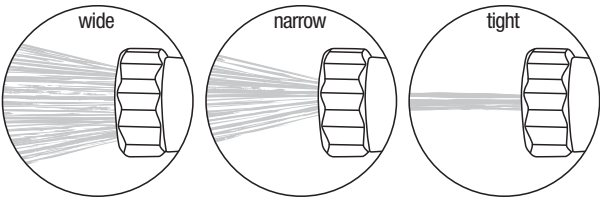



Notice for California Consumers




WARNING: This product can expose you to chemicals including Lead, and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

NA1 Replacement Parts

Description	Part Number
Orange Insolated Cover	A N10C
Black Insolated Cover	B N1BC
White Insolated Cover	C N1WC
Red Insolated Cover	D N1RC
Yellow Insolated Cover	E N1YC
Aluminum Main Body	F N1AMB
Handle Replacement Kit	G N1HR
Barrel Cartridge Replacement Kit	H N1BR
Barrel Cartridge Replacement Kit	I N1BRX
Bolt Sleeve	J N1E
Locking Nut	K N1F



Replacement Covers

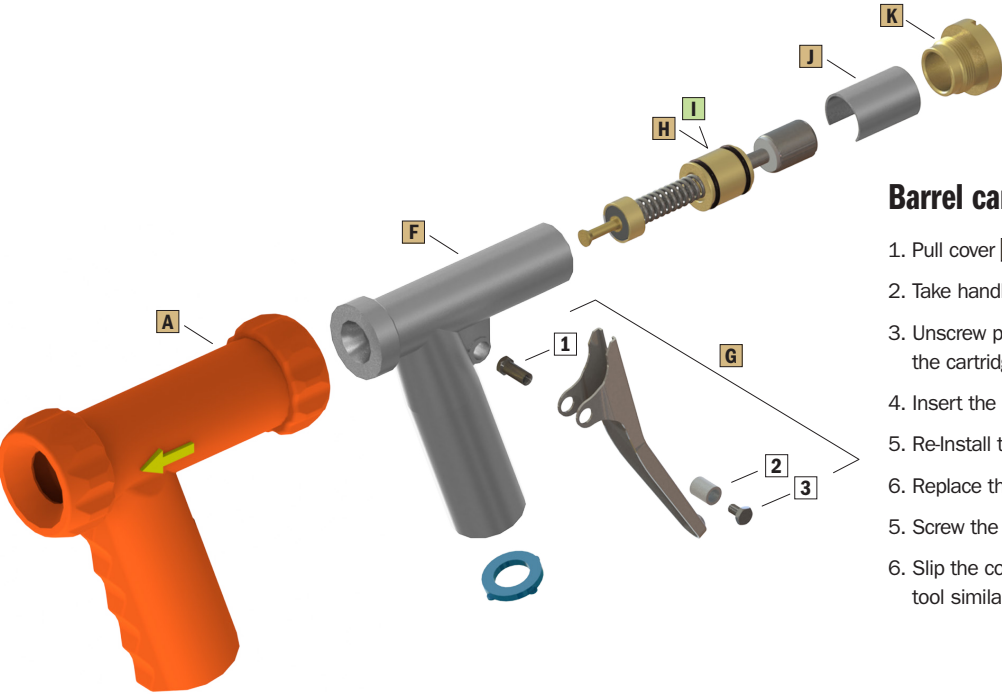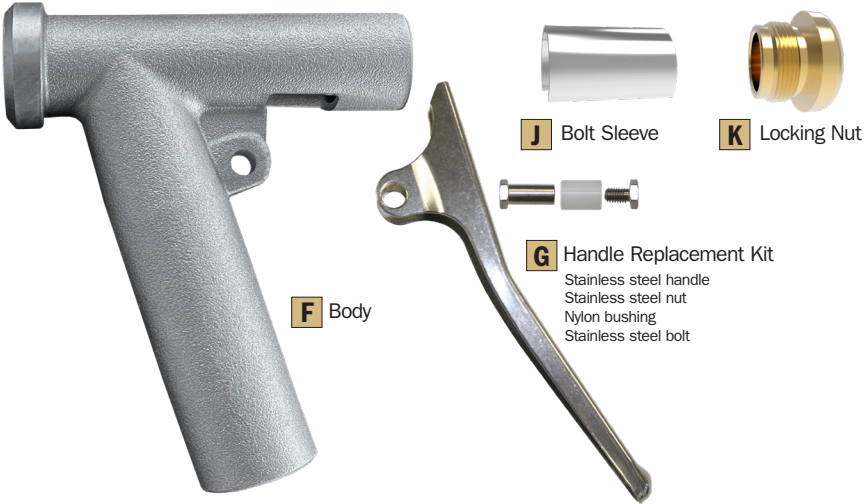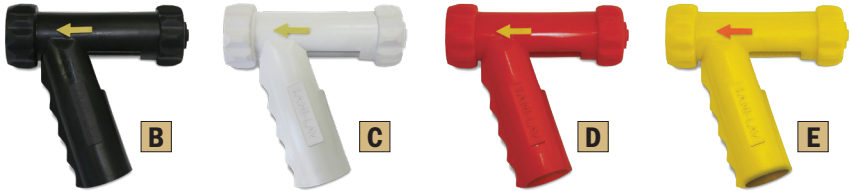

Barrel cartridge replacement kit Instructions

1. Pull cover **A** over the back of nozzle to expose the back end.
2. Take handle off nozzle by removing parts **1**, **2**, and **3**.
3. Unscrew part **K** locking nut and remove bolt sleeve **J** and the cartridge **H** or **I**.
4. Insert the new cartridge.
5. Re-Install the handle.
6. Replace the sleeve with the open end facing down.
5. Screw the locking nut back into place.
6. Slip the cover back over the nozzle end using a round ended tool similar to a shoe horn.