

Leaders in Reception Seating

Lesro Industries, Inc. 1 Griffin Road South Bloomfield, CT 06002

Phone 860.243.3226 Fax 860.243.5392 www.lesro.com

Assembly Instructions Newport, Amherst Steel & Lenox Steel Benches

Tools required: Phillips screwdriver, Allen wrench (included in hardware pack).

Note: These instructions are intended for various models and configurations. Your products may not look exactly as those shown in the diagrams.

Important: The assembly process requires that some hardware be kept loose until later in the sequence. Follow these instructions closely to ensure correct assembly.

Recommendation: Retighten all bolts on a seasonal basis to ensure your product remains strong and stable for many years of use.

Weight Capacity: 2-Seat Bench 550 lbs. 3-Seat Bench 650 lbs.

Parts List

Seat Cushion Leg Frames, 2 pcs. Cross Tubes, 2 pcs.

Hardware Pack

5%" Allen Bolts, 8 pcs. 2 3/4" Allen Bolts:

4 pcs. for 2-Seat


4 pcs. for 3-Seat

3" Phillips Screws:


4 pcs. for 2-Seat


6 pcs. for 3-Seat

Allen Wrench

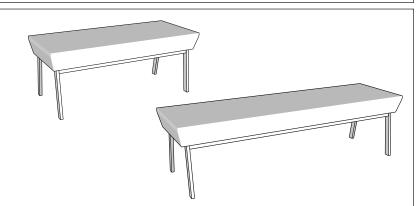

- Unpack and identify all parts. Note: Leg frames are interchangeable - no left or right.
- Connect cross tubes between leg frames, as shown in figure 1. Stems on leg frames slide inside cross tubes. Attach using %" Allen bolts. Keep bolts slightly loose for now.
- 3. Place seat cushion upside down on a clean surface.
- 4. Place leg frame assembly on cushion, as shown in figure 2. Align holes and attach using 2 ¾" Allen bolts in each corner and 3" Phillips screws through cross tubes. Once all screws and bolts are started, tighten all securely. Use care not to strip the Phillips screws.
- Tighten %" Allen bolts from step 2 securely.
- 6. Your product is now assembled and ready to use.

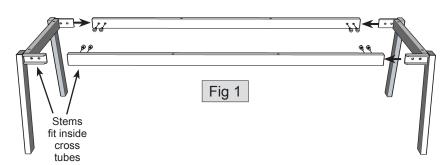

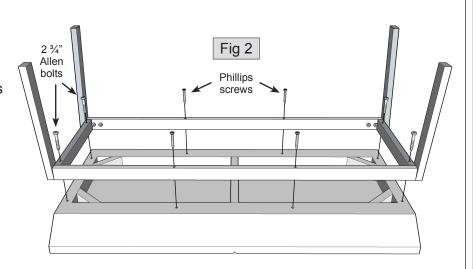

Thank you for purchasing a Lesro product.

Need assistance with assembly? Call Lesro customer service 1-800-275-7545.

Visit us online at www.lesro.com