
REPLACEMENT INSTRUCTIONS


HEATED DISPLAY CASE FRONT DECAL



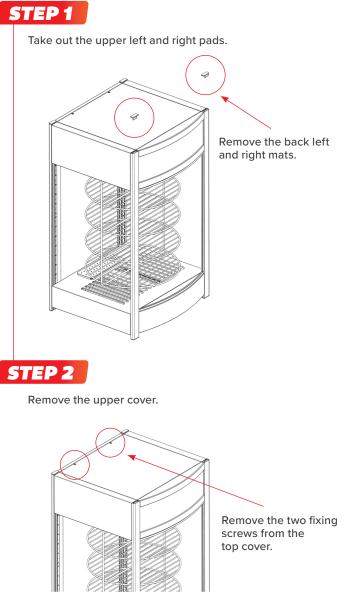


STEP 3

Remove components on the front panel.

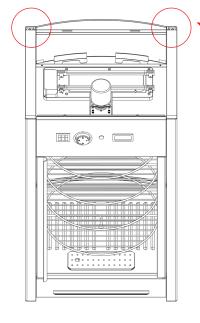


Use a long-rod screwdriver to loosen the screws on components on the front panel. Do not remove the screws completely. If the screws become loose and fall off, remove them from the inside immediately.



Pull out the front components.

STEP 4

Replace new front decal.



Flip the top cover up and take it out backwards. Use a screwdriver to pry the top cover when turning it up.

