







Parts List

REF.	DESCRIPTION	PICTURE	QTY
A	Leg		2
B	Support Tube		2
C	End Slats		4
D	Slats		5
E1	Support Ribs		3
E2	Arm		1

Hardware

REF.	DESCRIPTION	PICTURE	QTY
F	Bolt		4
G	Self Drilling Screw		54
H	Screw		26
J	Screw and Nut		4
I	Allen Key		1
K	Hex Bit Socket		1

NOTE: Mounting hardware is not included.

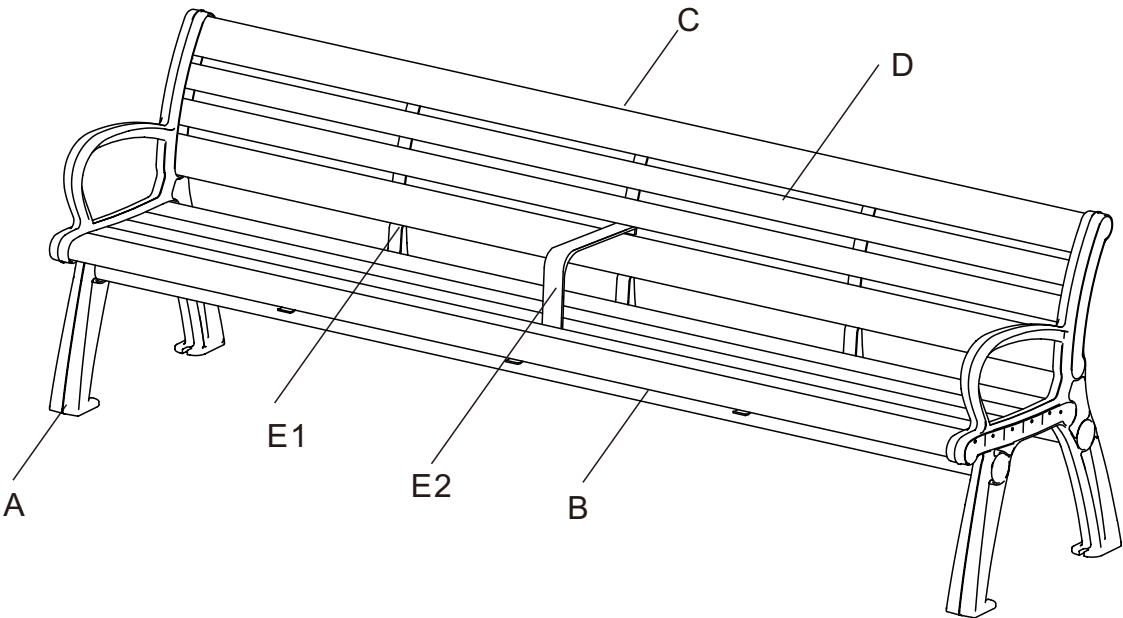


Warning

- Assembly and installation of equipment should be performed by 2 people.
 - Workers should use OSHA approved safety and lifting equipment.
- Ensure that the bench is installed on a level surface.
 - Ensure surface is of a strong material, preferably concrete.
 - Use proper mounting hardware.
- Do not climb on, under or through tables and benches.
 - Two people required to move tables and benches.
 - Do not use if any parts of bench or table are broken or damaged.
 - Inspect and tighten hardware every six months.
 - Replace rusted hardware and damaged components.

8FT Plastic Slats Bench with Cast Aluminum Leg

Step1:



Connect the 2 support tubes (Ref. B) with both legs (Ref. A) with bolts (Ref.F). Do not fully tighten.

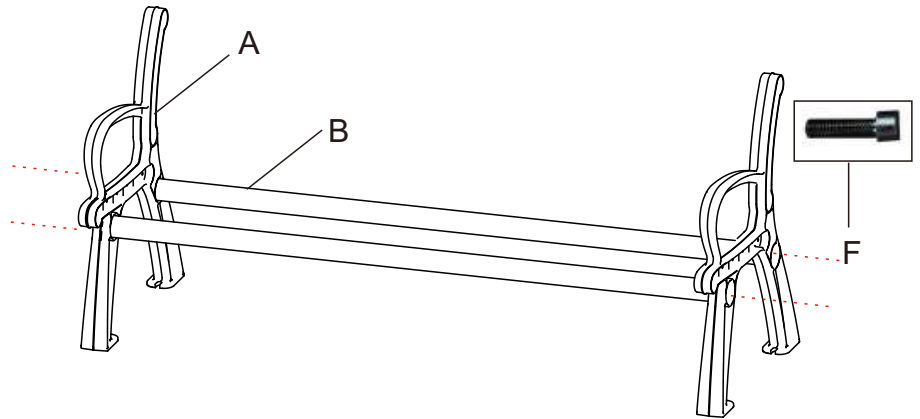

Step2:


Place three support ribs (Ref. E1) evenly spaced on top of the support tubes.

If you need the arm (Ref.E2), attach it to the middle support rib first with 4 screws (Ref.J).

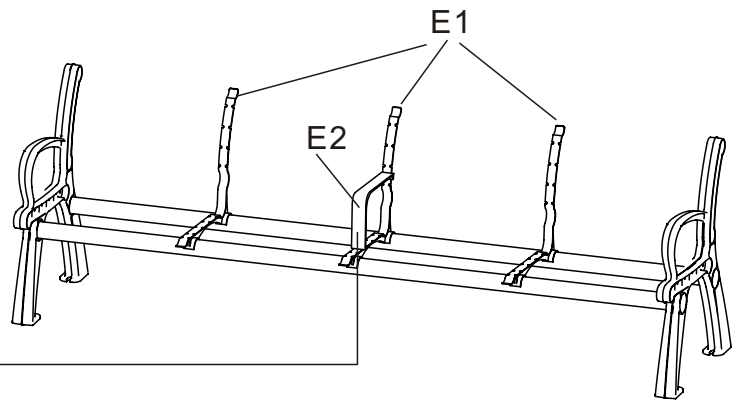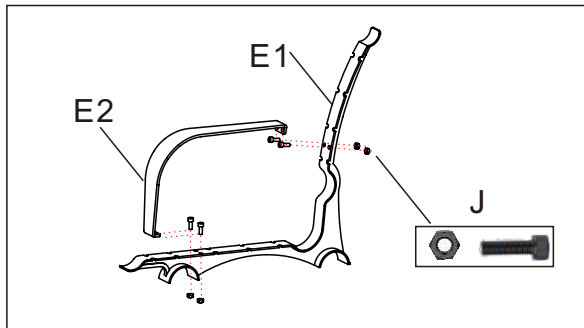

Step3:

Insert and connect both end slats and slats (Ref. C and Ref. D) in between the legs with screws (Ref. H) on both ends. Do not fully tighten. Repeat this with both the seat and backrest slats.

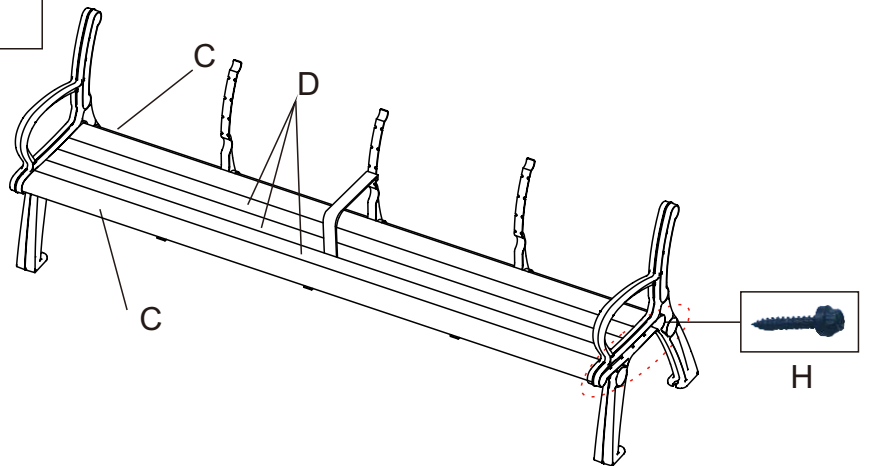

Step4:

Screw down the support ribs with the self drilling screws (Ref. G). Fully fasten all screws

