


# I, 2, 3-TIER ONE COLUMN LOCKERS

## **ASSEMBLY INSTRUCTIONS**

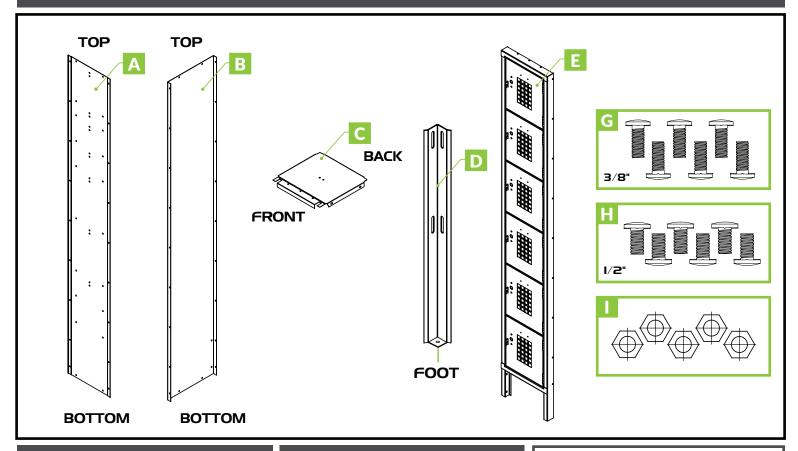

## **INCLUDED PARTS**

- (1) Back Panel
- (2) Side Panels
- (2\*) (3\*\*) (4\*\*\*) Top and Bottom Shelves
- (2) Extension Legs
- (1) Front Panel w/ Built-in Legs
- (70) 3/8" Bolts
- (4) 1/2" Bolts for Extension Legs
- (74) 10-24 Nuts

## TOOLS NEEDED

- 1 Wood Plank
- 2 Hammer
- 3 Ratchet and 10mm Socket

## **Need Help?**

Scan here to follow along with the full assembly video!



#### 4/2023

#### **ADDITIONAL NOTES:**

- If lockers are bent, use a wood block and hammer to reshape.
- Bolts are hand-tighten safe, however, use a ratchet where necessary.
- Make note that package includes extra bolts and nuts in case of lost parts.
- When fastening bolts, bolt thread faces interior, bolt head faces exterior.
- Extension legs are adjustable if floor is not flat.

REGENCYTABLESANDSINKS.COM

- 1 Lay out and separate all parts and hardware.
- Align one side panel and one back panel at a 90-degree angle.
  - A Garment hook holes in the middle of the side panel and the back panel will be at the top of the lockers.



The side panel is to be positioned on the inside of the back panel's ledge.



Use the 3/8" bolts to connect the panels together, starting at the top of the locker and working downward.



Before connecting the last two bolts at the bottom, insert the extension leg. Using a ½" bolt, connect the extension leg, the side panel, and the back panel together. The foot of the extension leg should face downwards.



- 3 Use 3/8" bolt to connect the top, bottom, and middle shelves to the side panel.
  - The flat surface of the shelves should be facing up.



- B To ensure the shelves are connected in the correct location. You may lay the locker door aside the panels.
- 4 Align a second side panel at a 90-degree angle. Ensure the side panel is positioned on the inside of the back panel's ledge.
  - A Use ½" bolt to connect the second side panel to the back panel.



Use a ½" bolt to connect the top shelf and the middle shelf.



- Before connecting the bottom shelf, insert a second extension leg.
- Using a 1/2" bolt, connect the extension leg, the side panel, and the back panels together. The foot of the extension leg D should face downwards, same as the first extension leg.



- At this point, all side panels, back panels. and shelving should all be connected. Please double check that the structure is sturdy and nothing is loose. Tighten bolts with a ratchet if necessary.
- 6 Place the locker door on top of the panel set and squeeze the panels together so the locker doors fit into place and are fully pushed down. Use of force may be required to ensure all bolt holes are aligned properly.





Inside of shelving will need to be bolted to the

With at least two adults, safely stand up the locker unit onto its feet.



Inspect the outside of the locker – front, back, and sides. Finish bolting any shelves, side panels, back panels, and extension legs, ensuring that all pieces are bolted together. Tighten bolts with ratchet if necessary.

#### **OPTIONAL:**

- Garmet hooks can be placed where desired.
- Skirt Boards

8

• (1) Long piece and (2) short pieces provided to fill gap between locker and floor.