

Shrink Wrapping

FEATURES:

- Provides package with a crystal clear tamper proof package
- Protects from moisture and dust
- To shrink wrap, you will need shrink wrap material, sealer and heat source to shrink (heat gun or shrink tunnel)



L-Bar Sealers - Table-Top



L-Bar Sealers - Free-Standing



Combo Units



Shrink Tunnels

43 Heat Guns

43 I-Bar Sealer

44 Shrink Wrapping Kits

45 L-Bar - Table-top

45 L-Bar - Free-Standing

47 L-Bar - Combo Units

50 Shrink Tunnel

Film/Sealer Size?

- Measure the width and height of your package and add 5-10% to the measurement. This will provide you with the minimum shrink bag width
- Measure the length and height of your product and add 5-10% to the measurement. This will provide you with the maximum shrink bag length
- For shrink film (centerfold), take the smallest figure of the two to determine the shrink film width needed

Heat Guns



HG-1 / HG-1-CY

- Value option for low volume
- Two temperature settings



HG-501D

- Shrinks faster
- Long life universal motor 2X run life



MADE
IN THE **USA**

ShrinkFast Model 998

- Shrink wrap pallets / machinery
- Propane powered
- UL Listed

Model #	Description	Weight	Ships via
HG-1	Economy Heat Gun, 1200W, 12A, 120V	2	UPS
HG-1-CY	Economy Heat Gun, 1200W, 12A, 120V	2	UPS
HG-501D	Master Heat Gun, 1700W, 14A, 120V	5	UPS
Model998	ShrinkFast Model 998 Industrial Heat Gun	18	UPS
Model998-4-EXT	4' Extension for Model 998 Heat Gun	5	UPS
Model998-6-EXT	6' Extension for Model 998 Heat Gun	8	UPS

I-Bar Sealers



FEATURES:


- Round wire designed for shrink wrapping
- Cutter units (IC) are ideal for making bags out of tubing
- Includes film roller and heat gun holder

Model #	Seal Length	Seal Width	Cutter	Weight	Ships via
W-350I	14"	Round	No Sliding Cutter	38	UPS
W-500I	20"	Round	No Sliding Cutter	45	UPS
W-650I	26"	Round	No Sliding Cutter	53	UPS
W-750I	30"	Round	No Sliding Cutter	55	UPS
W-900I	35"	Round	No Sliding Cutter	64	UPS
W-350IC	14"	2.7mm	Sliding Cutter	38	UPS
W-500IC	20"	2.7mm	Sliding Cutter	45	UPS
W-650IC	26"	2.7mm	Sliding Cutter	53	UPS
W-750IC	30"	2.7mm	Sliding Cutter	55	UPS
W-900IC	35"	2.7mm	Sliding Cutter	64	UPS

Complete Shrink Wrapping Kits

FEATURES:

- Complete shrink packaging system, including sealer, shrink bags/film, and heat gun
- Easy to use
- Cost effective
- Great starter package for small and start up productions

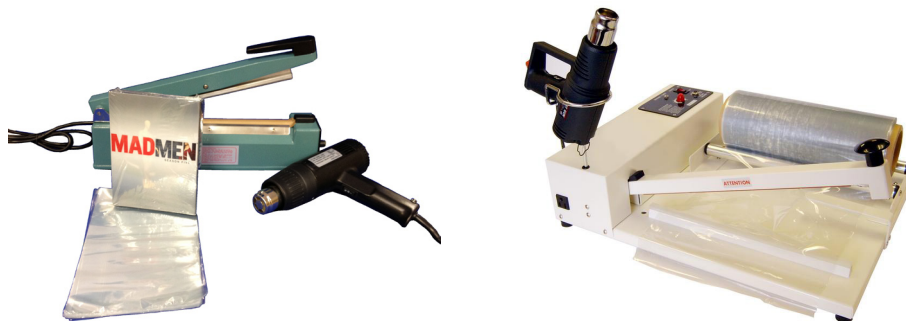

Starter Shrink Wrap Kit

- Value unit
- FS-Series hand sealers
- Shrink bags and/or film (500ft)

Standard Shrink Wrap Kits

- W-Series I-Bar sealers
- Shrink film (500ft)
- Heat gun

Model #	Description	Weight	Ships via
SWK-8-04CD	8" Sealer (FS-200rnd), 6" x 6.5" CD Shrink Bags, 500pcs, Heat Gun	12	UPS
SWK-8-04DVD	8" Sealer (FS-200rnd), 6.5" x 10.5" DVD Shrink Bags, 500pcs, Heat Gun	12	UPS
SWK-12-04CD	12" Sealer (FS-300rnd), 6" x 6.5" CD Shrink Bags, 500pcs, Heat Gun	15	UPS
SWK-12-04DVD	12" Sealer (FS-300rnd), 6.5" x 10.5" DVD Shrink Bags, 500pcs, Heat Gun	16	UPS
SWK-14-S3	14" Bar Sealer (W-350I), 12" Film, 500ft., Heat Gun	38 / 12	UPS
SWK-20-S3	20" Bar Sealer (W-500I), 18" Film, 500ft., Heat Gun	45 / 16	UPS
SWK-26-S3	26" Bar Sealer (W-650I), 24" Film, 500ft., Heat Gun	53 / 18	UPS
SWK-30-S3	30" Bar Sealer (W-750I), 28" Film, 500ft., Heat Gun	55 / 20	UPS

L-Bar Sealers - Table-Top

FEATURES:

- Easy to operate
- No warm up time
- Pair with either heat gun or shrink tunnel
- Includes film roller and perforator
- Ideal for space constrained customers
- Seal length: vertical x horizontal



W-Series

- Steel constructed for heavy duty use
- Adjustable height work table
- Heating element located on the upper jaw
- Seal lengths: 14" x 20", 20" x 26", 26" x 31"

YC-Series

- Adjustable film dispenser rack with smooth bearing rollers
- Heating element located on the base of the sealer
- Seal lengths: 12" x 18", 18" x 18", 24" x 32"

Model #	Description	Weight	Ships via
W-350L	W-Series 14" x 20" L-Bar Sealer w/ Film Roller	92 / 18	Freight
W-500L	W-Series 20" x 26" L-Bar Sealer w/ Film Roller	98 / 21	Freight
W-650L	W-Series 26" x 31" L-Bar Sealer w/ Film Roller	132 / 16	Freight
YC-300HL	YC-Series 12" x 18" L-Bar Sealer w/ Film Roller	47 / 40	Freight
YC-450HL	YC-Series 18" x 18" L-Bar Sealer w/ Film Roller	67 / 40	Freight
YC-600HL	YC-Series 24" x 32" L-Bar Sealer w/ Film Roller	106 / 70	Freight

L-Bar Sealers - Free-Standing

Economy Series: SS-1519LMC



FEATURES:

- Entry-level, light duty
- Micro Knife band ribbon seal
- Dual magnet hold down
- Motorized discharge conveyor
- Recommended film: POF (PVC not recommended)
- Sealing speed: 8-10 packages per minute

Model #	Description	Weight	Ships via
SS-1519L*	15"W x 19"L Semi-Automatic L-Bar Sealer, 110V	331	Freight
SS-1519LM	15"W x 19"L Semi-Automatic L-Bar Sealer, Magnet Hold, 110V	331	Freight
SS-1519LMC	15"W x 19"L Semi-Automatic L-Bar Sealer, Magnet Hold, Power Discharge, 110V	331	Freight
SS-1519LMC-220V*	15"W x 19"L Semi-Automatic L-Bar Sealer, Magnet Hold, Power Discharge, 220V	331	Freight
*via special order			



L-Bar Sealers - Free-Standing

Standard Series: SS-1622

FEATURES:

- Designed to run two shifts per day
- MK-series: Micro Knife band ribbon seal (SS-3040W - 0.36 sealing wire)
- HK-series: Hot knife ideal for polyethylene
- Dual magnet hold down
- Motorized discharge conveyor
- Recommended film: POF (PVC not recommended)
- Sealing speed: 10-15 packages per minute

Model #	Description	Weight	Ships via
SS-1622MK	16"W x 22"L Semi-Automatic L-Bar, Micro Knife, Magnet Hold, 220V	396	Freight
SS-1622HK	16"W x 22"L Semi-Automatic L-Bar, Constant Heat, 220V	380	Freight
SS-1622MK-SS*	16"W x 22"L Semi-Automatic L-Bar, Micro Knife, Magnet Hold, 220V, Stainless Steel	TBD	Freight
SS-2028MK	20"W x 28"L Semi-Automatic L-Bar, Micro Knife, Magnet Hold, 220V	640	Freight
SS-2028MKA*	20"W x 28"L Semi-Automatic L-Bar, Micro Knife, Magnet Hold, 220V, Air Operated, Pivots from back	640	Freight
SS-2028MKA-V*	20"W x 28"L Semi-Automatic L-Bar, Micro Knife, Magnet Hold, 220V, Air Operated, Vertical seal head	640	Freight
SS-3040W*	30"W x 40"L Semi-Automatic L-Bar, Wire, Magnet Hold, 220V	950	Freight
SS-3040HK*	30"W x 40"L Semi-Automatic L-Bar, Constant Heat, Magnet Hold, 220V	950	Freight
SS-3040W-A-V-PI*	30"W x 40"L Semi-Automatic L-Bar, Wire, Magnet Hold, 220V, Power Unwind, Adjustable Inverting Head, Air	950	Freight
SS-3050HK*	30"W x 50"L Semi-Automatic L-Bar, Constant Heat, Magnet Hold, 220V	930	Freight
*via special order			

Micro Knife Sealing

The Micro Knife Sealing Technology is the most advanced system available on the semi-automatic L-Bar sealer. This PTFE-coated blade is guaranteed not to break for a full year or we will replace at no cost. PTFE coating allows the film to seal with minimal smoke or residue and produces straight seals with no pinholes. It is simply the best seal system on the market.



L-Bar Sealers - Combo Unit

All-In-One Series

FEATURES:

- All-in-one sealer and shrink tunnel
- Micro Knife technology sealing PVC or POF
- Magnetic hold down
- Max. package height: 8"
- Sealing speed: 3-5 packages per minute

Model #	Description	Weight	Ships via
SS-48ST-110V	12"W x 18.5"L Compact L-Bar Sealer with Hooded Shrink Chamber, 110V	270	Freight
SS-48ST-220V*	12"W x 18.5"L Compact L-Bar Sealer with Hooded Shrink Chamber, 220V	270	Freight
SS-76ST	16"W x 22"L Compact L-Bar Sealer with Hooded Shrink Chamber, 220V	340	Freight
SS-77ST*	20"W x 30"L Compact L-Bar Sealer with Hooded Shrink Chamber, 220V	400	Freight
<i>*via special order</i>			

L-Bar Sealers - Combo Unit

Economy Series: SS-1519EC

FEATURES:

- Entry-level, light duty
- Seal size: 15"W x 19"L
- Tunnel dimensions: 16"W x 6"H x 20"L
- Available in 110V or 220V
- L-Bar sealers features Micro Knife band ribbon seal, easy load film cradle, perforating pin wheel hole punch, adjustable film loading tray, signals end of cycle
- Tunnel features re-circulating air chamber, AC variable speed conveyor, 0-60FPM, digital temperature control, and automatic cool down with shut-off
- Recommended film: 60-80G POF (PVC not recommended)
- Sealing speed: 8-10 packages per minute
- Options: dual magnet hold down, power discharge conveyor, 220V, 8" tunnel height



Model #	Description	Weight	Ships via
SS-1519EC	15"W x 19"L L-Bar with 20"L x 16"W x 6"H Shrink Tunnel	460	Freight
SS-1519ECM	15"W x 19"L L-Bar with 20"L x 16"W x 6"H Shrink Tunnel, Magnet Hold	460	Freight
SS-1519ECMC	15"W x 19"L L-Bar with 20"L x 16"W x 6"H Shrink Tunnel, Magnet Hold, Power Discharge Conveyor	460	Freight
Options:			
SS-180-24	Gravity Roller Curved Conveyor - 180° Curve with 24" Straight Section		
SS-1519EC-Voltage-220V*	220V Option / 10amp		
SS-1519EC-8Tunnel*	8" Tunnel Height		
<i>*via special order</i>			



L-Bar Sealers - Combo

Standard Series: SS-1622MK-Combo

FEATURES:

- Designed to run two shifts per day
- Micro Knife technology seals POF (PVC not recommended)
- Seal size: 16"W x 22"L
- Tunnel dimensions: 18"W x 8"H x 28"L
- One power source
- L-Bar sealer adjusts from side to side while tunnel adjusts up and down with crank handle
- L-Bar sealer features dual magnet hold down, motorized discharge conveyor, easy load film cradle, perforating pin wheel hole punch, adjustable film loading tray, signals end of cycle
- Tunnel features re-circulating air chamber, AC variable speed conveyor, 0-60FPM, digital temperature control, and automatic cool down with shut-off
- Recommended film: POF (PVC not recommended)
- Sealing speed: 10-15 packages per minute
- Voltage: 220V, 1PH, 45 amps

Model #	Description	Weight	Ships via
SS-1622MK-Combo	16"W x 22" L-Bar with 28"L x 18"W x 8"H Shrink Tunnel, 220V	950	Freight
SS-1622MKA-Combo	16"W x 22" L-Bar with 28"L x 18"W x 8"H Shrink Tunnel, 220V, Air Operated	950	Freight
SS-1622MK/ST-1808-28	16"W x 22" L-Bar with 28"L x 18"W x 8"H Shrink Tunnel, 220V - Sold as set (two power source)	950	Freight
SS-1622MK/ST-1808-28-SS*	16"W x 22" L-Bar with 28"L x 18"W x 8"H Shrink Tunnel, 220V, Stainless Steel (two power source)	TBD	Freight
SS-180-36	Gravity Roller Curved Conveyor - 180° Curve with 36" Straight Section	43	Freight
SS-180-72	Gravity Roller Curved Conveyor - 180° Curve with 72" Straight Section	50	Freight
SS-180C	Gravity Roller Curved Conveyor - 180° Curve only - Right to Left	TBD	Freight
<i>*via special order</i>			



SS-180-36
Shown with optional
gravity conveyor



SS-1622MKA-Combo

NEW!

Automatic L-Bar Sealers & Tunnel Combo

SS-5300-Combo / SS-5600-Combo

FEATURES:

- “APA” Automatic Product Adjustment for easy and fast changeover
- Vertical seal head design and center seal
- Delta 7” color touch screen with 40 program memory - simply touch keypad and machine will automatically adjust to desired package size
- Speeds up to 40 PPM
- Self diagnostics
- Motorized scrap windup with alarm
- Variable speed drive: 0-110 FPM
- Max film width: 24”
- 220V, 1 Phase, 50A



Model #	Description	Min Pkg	Max Pkg	Weight	Ships via
SS-5300CS-Combo*	Fully Automatic 19" x 16" L-Bar with 40"L x 18"W x 8"H Shrink Tunnel - Service & Training Fees Required	2.5" x 2.5" x 1/8"	19" x 16" x 5"	TBD	Freight
SS-5600CS-Combo*	Fully Automatic 25" x 19" L-Bar with 40"L x 18"W x 8"H Shrink Tunnel - Service & Training Fees Required	2.5" x 2.5" x 1/8"	25" x 16" x 8"	TBD	Freight
*via special order					



Shrink Tunnel

Economy Series

FEATURES:

- Designed for continuous shrinking of PVC, POF and PP film
- Easy to use and reduces labor cost
- Voltage: 220V

Model #	Description	Weight	Ships via
CN-4520A	Value Unit: 17.7"W x 7.9"H x 31.5"L Shrink Tunnel, 220V	240	Freight
CN-4015A*	Value Unit: 15.7"W x 5.9"H x 27.6"L Shrink Tunnel, 220V	240	Freight
CN-4530A*	Value Unit: 17.7"W x 11.8"H x 31.5"L Shrink Tunnel, 220V	240	Freight
CN-4520AL*	Value Unit: 17.7"W x 7.9"H x 39.5"L Shrink Tunnel, 220V	240	Freight
CN-4530AL*	Value Unit: 17.7"W x 11.8"H x 39.5"L Shrink Tunnel, 220V	240	Freight
Options:			
Net-CN-4520A*	Net Belting		
PTFE-CN-4520A	PTFE Mesh Belting		
<i>*via special order</i>			



Shrink Tunnel

ST-Series: Light Duty

FEATURES:

- Light duty
- Tunnel dimensions: 20"L x 16"W x 6"H
- Fully re-circulating shrink tunnel
- 4 direction air flow
- AC variable speed conveyor 0-75FPM
- Digital temperature control 0-350F
- Automatic cool down with shut off
- Optional 8" height
- Voltage: 110V or 220V

Model #	Description	Weight	Ships via
ST-1606-20-110V	Light Duty: 16"W x 6"H x 20"L Shrink Tunnel, 110V	331	Freight
ST-1606-20-110V-Tabletop	Light Duty: 16"W x 6"H x 20"L Shrink Tunnel, 110V, Tabletop	220	Freight
ST-1606-20-220V	Light Duty: 16"W x 6"H x 20"L Shrink Tunnel, 220V	331	Freight
ST-1606-20-220V-Tabletop	Light Duty: 16"W x 6"H x 20"L Shrink Tunnel, 220V, Tabletop	220	Freight
Options:			
Belt-PTFE-160620	PTFE Mesh Belt Overlay Kit		
ST-Height-8*	8" Tunnel Height		
<i>*via special order</i>			



Shrink Tunnel

ST-Series: Standard

FEATURES:

- General purpose
- Tunnel dimensions: 28"L x 18"W x 8"H
- Fully re-circulating shrink tunnel
- 4 direction air flow
- AC variable speed conveyor 0-75FPM
- Digital temperature control 0-400F
- 1/2HP blower motor
- Voltage: 220V

Model #	Description	Weight	Ships via
ST-1808-28	Standard: 18"W x 8"H x 28"L Shrink Tunnel, 220V	511	Freight
ST-1808-28-SS	Standard: 18"W x 8"H x 28"L Shrink Tunnel, 220V - Stainless Steel	TBD	Freight
ST-1812-28	Standard: 18"W x 12"H x 28"L Shrink Tunnel, 220V	517	Freight
Options:			
Belt-HD-180828	High Density Roller Kit (Rollers on 1" Centers, 1/2" Spacing)		
Belt-PTFE-180828	PTFE Mesh Belt Overlay Kit		
Belt-SS-180828	Stainless Steel Metal Mesh Belting		
Belt-Falcon-180828	Heavy Duty Plastic Falcon Belting		

Shrink Tunnel

ST-Series: Medium Duty



FEATURES:

- Medium duty
- Tunnel dimensions: 44"L x 18"W x 8"H
- Fully re-circulating shrink tunnel
- 4 direction air flow
- AC variable speed conveyor 0-75FPM
- Digital temperature control 0-400F
- 1HP blower motor
- Voltage: 220V

Model #	Description	Weight	Ships via
ST-1808-44	Medium Duty: 18"W x 8"H x 44"L Shrink Tunnel, 220V	725	Freight
ST-1808-44-SS	Medium Duty: 18"W x 8"H x 44"L Shrink Tunnel, 220V - Stainless Steel	TBD	Freight
ST-1812-44	Medium Duty: 18"W x 12"H x 44"L Shrink Tunnel, 220V	725	Freight
ST-1816-44*	Medium Duty: 18"W x 16"H x 44"L Shrink Tunnel, 220V	TBD	Freight
Options:			
Belt-HD-180844	High Density Roller Kit (Rollers on 1" Centers, 1/2" Spacing)		
Belt-PTFE-180844	PTFE Mesh Belt Overlay Kit		
Belt-SS-180844	Stainless Steel Metal Mesh Belting		
*via special order			




Shrink Tunnel

ST-Series: Heavy Duty

FEATURES:

- High capacity
- Fully re-circulating shrink tunnel
- AC variable speed conveyor 0-75FPM
- Digital temperature control 0-400F
- Automatic cool down with shut off
- 1HP blower motor
- Voltage: 220V, 3 Phase


Model #	Description	Weight	Ships via
ST-2208-48	Heavy Duty: 22"W x 8"H x 48"L Shrink Tunnel, 220V, 3 Phase	840	Freight
ST-2208-48-SS*	Heavy Duty: 22"W x 8"H x 48"L Shrink Tunnel, 220V, 3 Phase - Stainless Steel	TBD	Freight
ST-2216-48*	Heavy Duty: 22"W x 12"H x 48"L Shrink Tunnel, 220V, 3 Phase	1056	Freight
ST-3612-60*	Heavy Duty: 36"W x 12"H x 60"L Shrink Tunnel, 220V, 3 Phase	1400	Freight
ST-3616-60	Heavy Duty: 36"W x 16"H x 60"L Shrink Tunnel, 220V, 3 Phase	1600	Freight
ST-3620-60*	Heavy Duty: 36"W x 20"H x 60"L Shrink Tunnel, 220V, 3 Phase	1650	Freight
ST-3624-60*	Heavy Duty: 36"W x 24"H x 60"L Shrink Tunnel, 220V, 3 Phase	TBD	Freight
ST-3628-60*	Heavy Duty: 36"W x 28"H x 60"L Shrink Tunnel, 220V, 3 Phase	TBD	Freight
ST-4512-60*	Heavy Duty: 45"W x 12"H x 60"L Shrink Tunnel, 220V, 3 Phase	1700	Freight
ST-5520-72*	Heavy Duty: 55"W x 20"H x 72"L Shrink Tunnel, 220V, 3 Phase	2000	Freight
ST-6520-96*	Heavy Duty: 65"W x 20"H x 96"L Shrink Tunnel, 220V, 3 Phase	2400	Freight
PTFEBelt-SS-361260	PTFE Mesh Belt Overlay Kit		
Belt-SS-361260	Stainless Steel Metal Mesh Belting		
*via special order			



PTFE Mesh Belt Overlay



Stainless Steel Metal
Mesh Belting



Falcoln Belting



High Density Rollers -
Tight Spacing