

# User Installation and Assembly Instructions

**speco technologies<sup>®</sup>**

## Hanging Pendant Speakers (SP30PT/SP30PTB)

- Ideal for installations where ceiling or wall mounting is prohibitive
- Built-in 70/25V transformer
- Speaker includes hanging mount chain




### Installation

- Recommended wiring: 18 gauge copper wire (or heavier)
- Note: Speaker wire alone is NOT sufficient for mounting. A separate mounting wire, chain or cable (not included) MUST be used.**
- Use extreme care in mounting. Use a wire, chain or cable (not included) capable of supporting at least 20 pounds of weight, and attach securely to overhead rafters or secure mount in ceiling.
- Fasten end of wire, chain or cable securely to the top of the included tri-cable hanging mount chain.
- Insert each of the three sections to the three built-in hooks on the speaker.
- In installations where safety is an extreme concern or where required by local jurisdiction, an additional safety loop has been installed to the top of the speaker. It is recommended to use this loop in all installations.
- Speco Technologies assumes no liability for improperly installed speakers.
- Refer to below illustrations for assembly instructions

Attach end of mounting cable through swivel mount at top of hanging mount chain

### Hanging Installation

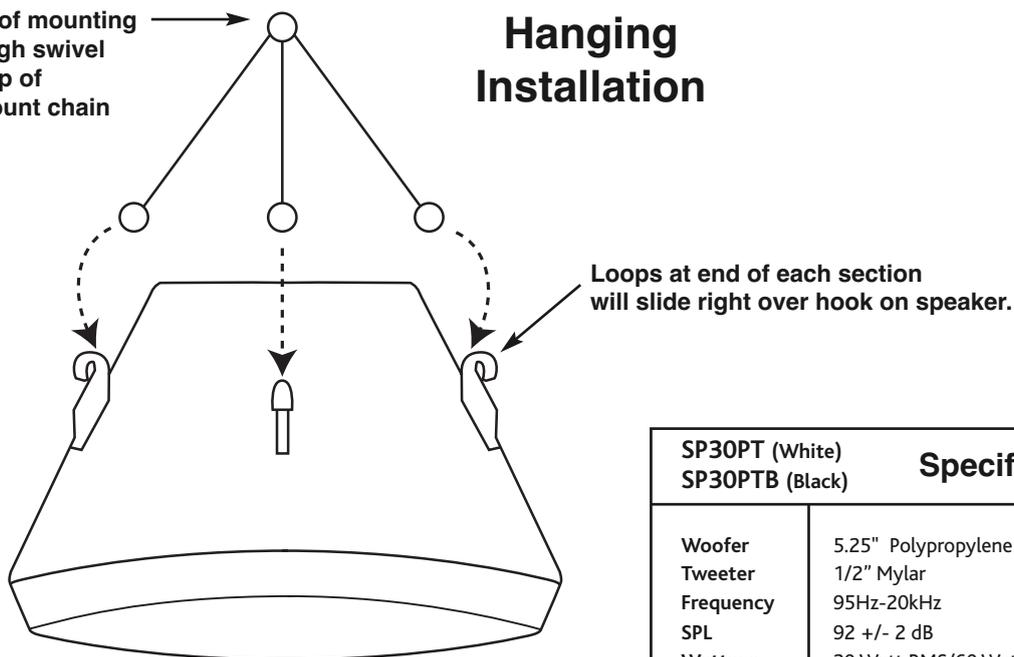

SP30PT (White) SP30PTB (Black)	Specifications
Woofer	5.25" Polypropylene
Tweeter	1/2" Mylar
Frequency	95Hz-20kHz
SPL	92 +/- 2 dB
Wattage	30 Watt RMS/60 Watt Max
Impedance	8 Ohms
Transformer	70V/25V (30W/15W/ 7.5W/ 5W/2.5W)