LAVEX™

## ABS Plastic Surface-Mounted

# Toilet Seat Cover Dispenser

## Use & Care Instructions

11/2026

## Hazard Statements

**WARNING – To prevent personal injury.**

- **Do Not Use if Damaged:** Product should not be used if damage is found. Contact customer service.
- **WARNING:** Before drilling, check for concealed utilities to avoid potential injury / property damage.

## Initial Setup

**Inspect the Packaging:** Examine the kit's packaging for any signs of damage that may have occurred during shipping.

**Unboxing:** Open the packaging with care.


- Do not press a box cutter or knife through the box, as it may damage the item.
- Verify that you do not damage the dispenser when removing it from the box.
- If any damage is present, contact customer service immediately.

**Mounting Hardware:** Select mounting hardware appropriate for the wall substrate. The supplied hardware may not be compatible with all installation surfaces.


## Parts List

### Included

**A** Seat Cover Dispenser

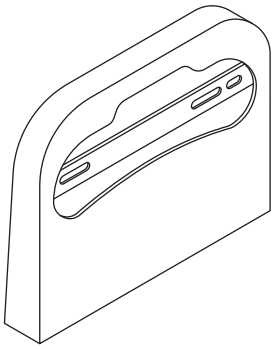

**B** Screws



**C** Anchors



### Not Included

**D** Level



**E** Screwdriver



**F** Drill Bit




**G** Power Drill



**H** Pencil



**I** Clean Cloth



**J** Appropriate Surface Cleaner



**NOTE:** Your dispenser may appear differently than shown in drawings. Installation instructions still apply.

**NOTE:** The number of screws & anchors varies by model. If you use your own hardware, use the same number provided.

# Installation

1. **Determine Mounting Location:** Typical mounting locations are on a solid wall or partition wall.
2. **Surface Preparation:** Thoroughly clean the installation area. Allow the surface to dry completely.

   **NOTE:** Mounting holes may appear differently than shown.
3. **Hardware Selection:** Select hardware suitable for the wall substrate and installation conditions.
4. **Mark Mounting Holes:** Hold the dispenser in the desired location. Use a level to ensure the dispenser is properly aligned (Fig. 1). Mark the two wall locations where the screws will be installed (Fig. 2).
5. **Drill Pilot Holes:** Drill at the two marked locations using an appropriately sized drill bit. Insert wall anchors if needed (Fig. 3).
6. **Secure Dispenser:** Align the dispenser with the drilled holes and install the screws until hand-tight (Fig. 4 - Screws / Fig. 5 - Anchors & Screws).
7. **Remove Tab:** Remove the perforated tab from the toilet seat cover pack.
8. **Loading Dispenser:** Insert the pack through the bottom of the dispenser. Push the bottom of the pack toward the front of the dispenser to hold it in place (Fig. 6).

# Cleaning

**Avoid Abrasives:** Do not use any abrasive cleaners or pads to clean the dispenser.

**Wash Surfaces:** Clean the surface using warm water, mild detergent, and a clean cloth or non-abrasive pad, then dry thoroughly.

FIG. 1

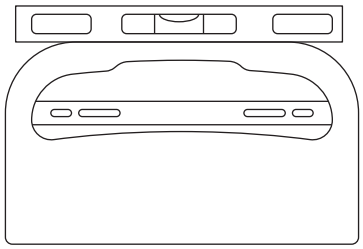


FIG. 2




FIG. 3




FIG. 4

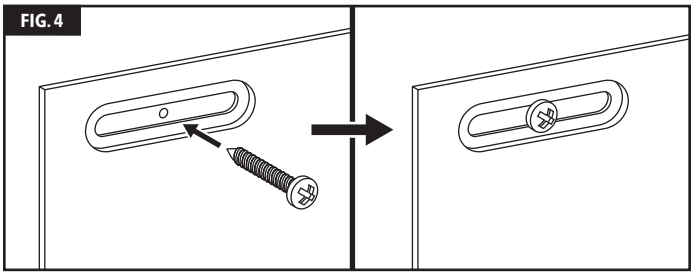


FIG. 5

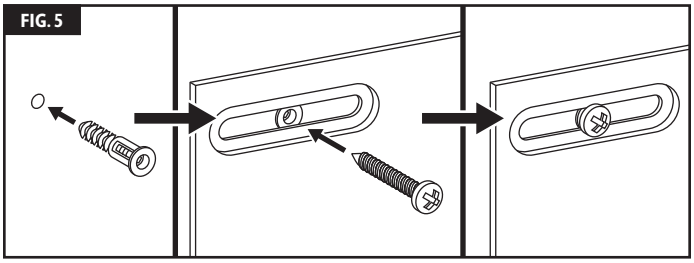


FIG. 6

