LAVEX™

Stainless Steel Surface-Mounted

Toilet Seat Cover Dispenser

Use & Care Instructions

11/2026

Hazard Statements

WARNING – To prevent personal injury.

- **Do Not Use if Damaged:** Product should not be used if damage is found. Contact customer service.
- **WARNING:** Before drilling, check for concealed utilities to avoid potential injury / property damage.

Initial Setup

Inspect the Packaging: Examine the kit's packaging for any signs of damage that may have occurred during shipping.

Unboxing: Open the packaging with care.


- Do not press a box cutter or knife through the box, as it may damage the item.
- Verify that you do not damage the dispenser when removing it from the box.
- If any damage is present, contact customer service immediately.

Mounting Hardware: Select mounting hardware appropriate for the wall substrate. The supplied hardware may not be compatible with all installation surfaces.


Parts List

Included

A Seat Cover Dispenser

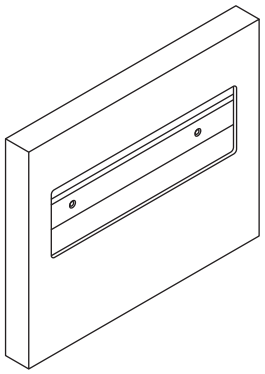

B Screws



C Anchors



Not Included

D Level



E Screwdriver



F Drill Bit


G Power Drill



H Pencil



I Clean Cloth



J Appropriate Surface Cleaner



NOTE: Your dispenser may appear differently than shown in drawings. Installation instructions still apply.

NOTE: The number of screws & anchors varies by model. If you use your own hardware, use the same number provided.

Installation

1. **Determine Mounting Location:** Typical mounting locations are on a solid wall or partition wall.
2. **Surface Preparation:** Thoroughly clean the installation area. Allow the surface to dry completely.

   NOTE: Mounting holes may appear differently than shown.
3. **Hardware Selection:** Select hardware suitable for the wall substrate and installation conditions.
4. **Mark Mounting Holes:** Hold the dispenser in the desired location. Use a level to ensure the dispenser is properly aligned (Fig. 1). Mark the two wall locations where the screws will be installed (Fig. 2).
5. **Drill Pilot Holes:** Drill at the two marked locations using an appropriately sized drill bit. Insert wall anchors if needed (Fig. 3).
6. **Secure Dispenser:** Align the dispenser with the drilled holes and install the screws until hand-tight (Fig. 4 - Screws / Fig. 5 - Anchors & Screws).
7. **Remove Tab:** Remove the perforated tab from the toilet seat cover pack.
8. **Loading Dispenser:** Insert the pack through the bottom of the dispenser. Push the bottom of the pack toward the front of the dispenser to hold it in place (Fig. 6).

Cleaning

Avoid Abrasives: Do not use any abrasive cleaners or pads to clean the dispenser.

Wash Surfaces: Clean the surface using warm water, mild detergent, and a clean cloth or non-abrasive pad, then dry thoroughly.

FIG. 1

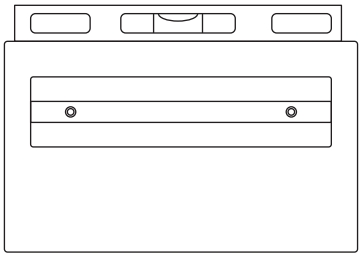


FIG. 2




FIG. 3




FIG. 4

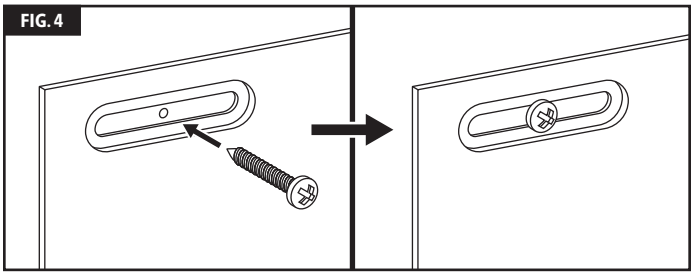


FIG. 5

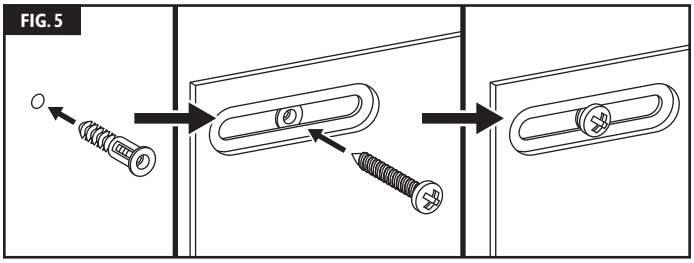


FIG. 6

