




## WBD2G Series – 2-Gallon Batter Dispenser Instructions

To ensure proper operation and equipment life, please follow the instructions below for assembly, cleaning and maintenance. Be sure to clean batter dispenser thoroughly before first use and after each use. Daily cleaning is recommended.

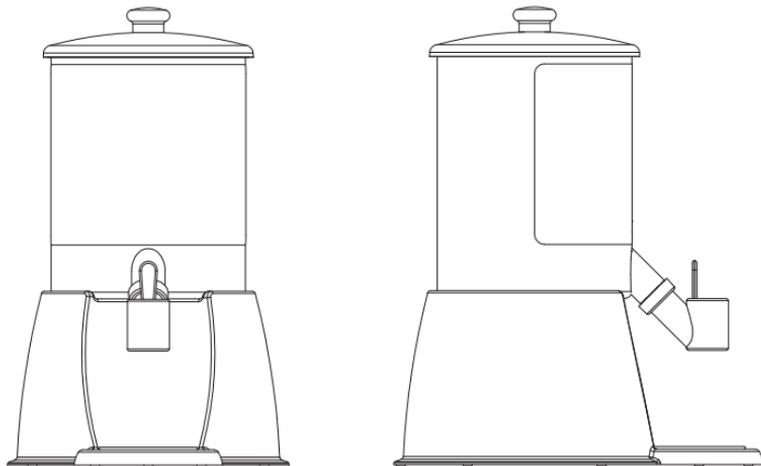

### ASSEMBLY & INSTRUCTIONS

1. Remove the batter dispenser from the packaging.
2. Rinse and dry batter container, spigot, saucer and lid before using. Wash using a mild soap and water solution with sponge. Run clean water through the spigot.
3. Place batter dispenser on a sturdy, level surface, away from the edges of the countertop.
4. Be sure that the spigot is secure on the batter container by tightening the collar clockwise.
5. Pour mixed batter into the batter container.
6. Place the batter container onto the dispenser base with the spigot facing outward. The indents on the bottom of the container should align with the bump-outs on the top of the base.
7. Place the lid onto the top of the dispenser housing and place the saucer on the housing underneath the spigot.
8. To dispense batter, place a batter cup underneath the spigot and push the spigot lever back.

**NOTE:** When full, batter dispenses at a quick rate. When batter is low, the batter will dispense slowly. Refill with batter as needed to keep the flow rate quick.

## CLEANING & MAINTENANCE

1. Remove the lid.
2. Remove the batter container from the dispenser base and discard or store remaining batter.
3. Run water through the spigot to clear it of batter. To thoroughly clean the spigot, remove it from the container by twisting the collar counterclockwise.
4. Wash the batter container housing and base by hand with warm water and a soap solution using a sponge or nonabrasive cloth. Take care when cleaning the graphic overlay.
5. Wash the lid, saucer and spigot by hand with a warm water and soap solution or place on the top rack of the dishwasher.

After washing, rinse with water, then immerse in sanitizing solution for 2 minutes. Sanitizing solution can also be sprayed on. Do not rinse off and allow to air-dry.

Washing solutions based on non-sudsing detergents and chlorine-based sanitizing solutions having a minimum chlorine concentration of 100 PPM are recommended.

The following washing, rinsing, and sanitizing solutions, or equivalents, may be used.

SOLUTIONS	PRODUCT	DILUTION IN WATER	TEMPERATURE
Washing	International Products Corporation LF2100 Liquid Low-Foam Cleaner	1%–2%: 1¼–2¾ Ounces/Gallon (lower dilution of 1% for normal cleaning and up to 2% for more stubborn soils)	Room temperature
Rinsing	Plain Water		
Sanitizing	Clorox® Regular Bleach (8.25% Hypochlorite Concentration)	2 Teaspoons/Gallon (alternately a bleach with 5.25% Hypochlorite Concentration can be used at dilution of 3 Teaspoons/Gallon)	Warm 95°F (35°C)

6. Allow all components to air-dry, or wipe dry with a nonabrasive cloth.

For additional questions, please contact Waring customer service:  
Weekdays – 8:30-4:30 EST, Call 1-800-4WARING  
Weekends – email, [service\\_waring@conair.com](mailto:service_waring@conair.com)