Wooden Ladder Back Barstool

ASSEMBLY INSTRUCTIONS



PARTS LIST:





STEP 1


Option 1: Place chair frame (A) on its back. Center seat (B) on the frame with four screw holes, push cushion against frame, ensuring front of seat is parallel with the front of the frame.


Option 2: Place seat (B) upside down on flat surface, preferably a table. Align chair frame (A) on top of seat (B). Center seat with four screws holes on frame, push seat against the back of the frame and ensure seat is parallel to the front of the frame.

3. There are two options for assembly, please reference

both steps for your preference.

OR



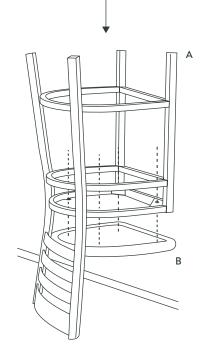


Wooden Ladder Back Barstool

ASSEMBLY INSTRUCTIONS



STEP 2

Attach seat (B) to frame (A) with four screws using a screwdriver or power drill. Secure long screws (C) in the wooden screw hole slots at the front of the chair frame. Secure short screws (D) in the metal brackets towards the back of the chair frame.

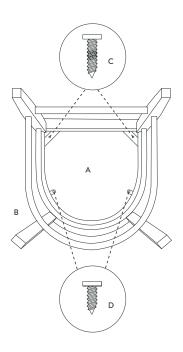

STEP 3

Ensure all screws are tightened fully. Stand chair upright for usage.

