

QUEST ELITE 4000

4-FLAVOR POST-MIX

DISPENSER





FEATURES

Wide product/ratio capability – Handles a wide range of post-mix products including juices with pulp, teas and cold coffees

Frost-free refrigeration compartment – Safely accommodates frozen, ambient or aseptic concentrate containers or BIB's

Large 14-16lb ice bank – Provides cold drinks during peak demand

Patented mixing system – Delivers consistent quality drinks with no stratification, slugging or dripping


LED illuminated graphics – Eliminates lost sales due to 'lights out' and reduces life costs

Narrow footprint – Conserves counter space Easy to service – Modular component design and ease of access speeds service

'Sold out' indication – Alerts operator to product out condition and maximizes sales

Optional flush feature – Speeds maintenance and promotes product safety

Flexible Merchandiser – Optional single graphic or multi-flavor strip merchandiser

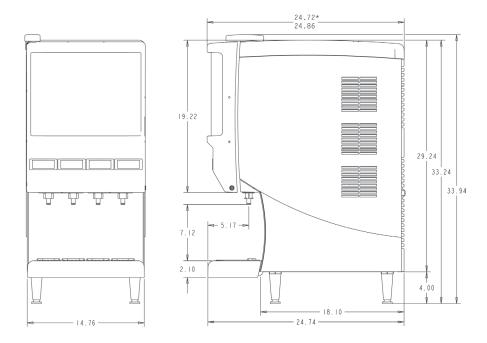

*Multi Flavor Merchandiser

PART NUMBER	DESCRIPTION		
721414201JU1	Quest Elite 4 flavor, illuminated, flush, push button 230/50, single-panel merch.		
721414211JU1	Quest Elite 4 flavor, illuminated, flush, portion control 230/50, single-panel merch.		
720404101JU1	Quest Elite 4 flavor, illuminated, non-flush, push button 115/60, single-panel merch.		
721404101JU2	Quest Elite 4 flavor, illuminated, non-flush, push button 115/60, 4-panel merch.		
729011003	Extended Panel Kit for Pitchers/Carafes		
720500066	Refillable Concentrate Reservoir (4) 3.5 L		
729011152	Cup Locator		
729011125	Bag-In-Box Option Kit		
729011220	Portion Control Kit - 4 Flavor		
729011183	Extender Nozzle Kit		

TECHNICAL SPECIFICATIONS

REFRIGERATION	. Hermetically sealed system,	WATER SUPPLY REQUIREMENTS		
	R-134a refrigerant 6.3 oz (180 g)	OPTIMUM SUPPLY SPECIFICATION	50psi(3.4 bar) flowing 3oz/sec	
ICE BANK	. 14-16lb	MAXIMUM STATIC PRESSURE	60psi (4.1 bar)	
CABINETRY	. High impact plastic cabinetry with stainless steel front panel	MINIMUM STATIC PRESSURE For water pressure exceeding the	. ,	
DISPENSER DIMENSIONS	. 29.3"H x 15"W x 24.3"D	specification, flow control set at 50psi is recommended		
	(74.4 cm x 37.5 cm x 61.7 cm)	COOLING	Three 12 oz drinks/min	
WEIGHT	. Dry: 120 lb (54.4 kg) Operating: 185 lb (83.9 kg)	00021110	(355 mL) @ 75°F (24°C) ambient, 75°F (24°C) incoming water,	
RECOMMENDED CLEARANCE	. Back: 4" (10.16 cm)		and 41°F (4°C) concentrate w/o	
	Top: 12" (34.8 cm)		exceeding a 40°F (4°C)	
	Sides: 1" (2.54 cm)	FLOW RATE	Adjustable water flow rate	
WATER CONNECTION	. 0.375" (0.95 cm) SAE male flare SAE fitting on dispenser		from 1-2.2 oz/sec	
		AGENCY LISTINGS	(UL) us NSF (F	
CONCENTRATE STORAGE Four 3.5 L bottles		LISTED		



IN THE U.S.A. Ph: 800.238.3600 Fax: 800.258.0255 OUTSIDE THE U.S.A.
Ph: 763.488.8200
Email: webmaster@cornelius.com

101 Broadway Street West Osseo, MN 55369 www.cornelius-usa.com