

1000-S

Low-Temperature Hot-Food Holding Cabinet

Keeping food that has been cooked to perfection hot and fresh until the moment it is served demands the gentle precision of Alto-Shaam's exclusive Halo Heat® technology. With controlled temperatures and a closed environment free from forced air, harsh heating elements, and added humidity, food is kept warm and flavorful, just as intended.


Standard features

- Simple and intuitive pushbutton control that commands all appliance functions with easily identifiable icons
- Halo Heat—a controlled, uniform heat source that gently surrounds food for better appearance, taste, and longer holding life
- Stainless steel interior resists corrosion
- Digital control senses temperature drops faster, providing quick heat recovery time
- Close temperature tolerance and even heat application maintain ideal serving temperature throughout the cabinet
- Antimicrobial handle retards the growth of illness-causing pathogens
- Door venting holds crispy food better

Deluxe control option (select one)

Deluxe control features SureTemp™ heat recovery system. SureTemp™ reacts immediately to compensate for any loss of heat whenever the door is opened.

- ☐ Deluxe control (A)
- ☐ Deluxe control with probe (A)
- ☐ Deluxe control with six (6) independent shelf timers (B)
- ☐ Deluxe control with probe and shelf timers (B)



Temperature range: 60°F to 200°F (16°C to 93°C)



- 4 Four full-size hotel pans or GN 1/1 pans 2-1/2" [65mm] deep [on optional wire shelves only]
 - 4 Four full-size hotel pans or GN 1/1 pans 4" [100mm] deep [on optional wire shelves only]
 - 8 Eight full-size sheet pans
- See pan capacities guide for maximums
- Two side racks with eight pan positions spaced on 2-15/16" [75mm] centers
- 120 lb [54 kg] product maximum
- 60 qt [76 L] volume maximum



1000-S

Configurations (select one)

Door choices

- ☐ Solid door, standard
- ☐ Window door, optional

Door swing

- ☐ Right hinged, standard
- ☐ Left hinged, optional

Cabinet choices

- ☐ Reach-in, standard
- ☐ Pass-through, optional—note: pass-through cabinets cannot have doors hinged on the same side

Electrical

- ☐ 120V, 1 ph
- ☐ 208–240V, 1 ph
- ☐ 230V, 1 ph

Accessories (select all that apply)

- ☐ Bumper, full perimeter [5009767]—not available with 2-1/2" casters
- ☐ Handle, push/pull [55662]
- ☐ Door lock with key [LK-22567]
- ☐ Security panel with lock—requires door lock [LK-22567][5013934]
- ☐ Drip tray—external [5009716]
- ☐ Pan grid, wire—18" x 16" [457mm x 406mm] pan insert [PN-2115]
- ☐ Legs, 6" [152mm], flanged—set of four [5011149]
- ☐ Drip pan with drain, 1-11/16" [43mm] deep [5005616]
- ☐ Drip pan without drain, 1-7/8" [48mm] deep [11906]
- ☐ Extra deep drip pan without drain, 2-7/16" [62mm] deep [1115]
- ☐ Water reservoir pan [1775]
- ☐ Water reservoir pan cover [1774]

Casters, stem—2 rigid, 2 swivel w/ brake

- ☐ 5" [127mm] [5004862]
- ☐ 2-1/2" [64mm] [5008022]
- ☐ 3-1/2" [89mm] [5008017]—standard

Shelves

- ☐ Stainless steel, reach-in [SH-2325]
- ☐ Stainless steel, pass-through [SH-2346]

Stacking hardware


- ☐ Over or under TH, SK, S-Series [5004864]
- ☐ Under CTX4-10 Combitherm® [5019679]



1000-S

DIMENSIONS

ALTO-SHAAM.

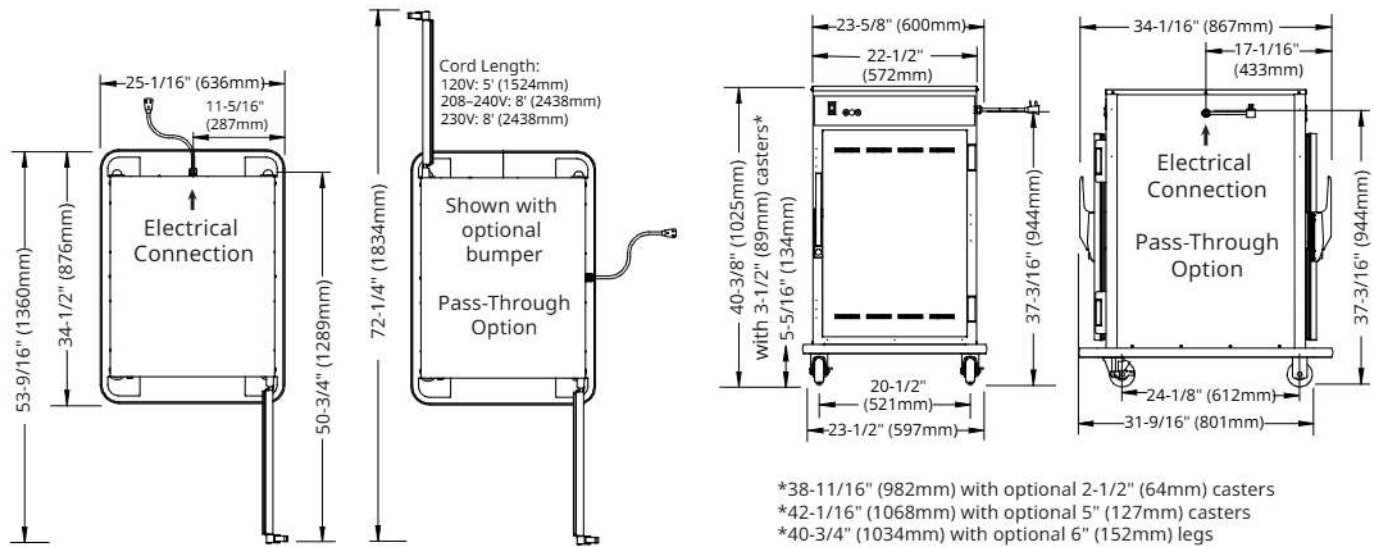

Model
1000-S

Exterior (H x W x D)

40-3/8" x 23-1/2" x 31-9/16" [1025mm x 597mm x 801mm]

Pass-Through Exterior

40-3/8" x 23-5/8" x 34-1/16" [1025mm x 600mm x 867mm]

Ship Dimensions (L x W x H)*

1000-S 35" x 35" x 50" [889mm x 889mm x 1270mm]

*Domestic ground shipping information. Contact factory for export weight and dimensions.

Interior (H x W x D)

26-7/8" x 18-7/8" x 26-1/2" [682mm x 479mm x 673mm]

Net Weight

175 lb [79 kg]

Ship Weight*

223 lb [101 kg]



- Appliance must be installed level.
- Appliance must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.
- Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector. Not factory supplied.



Top: 2" [51mm]
 Left: 1" [25mm]
 Right: 1" [25mm]
 Back: 3" [76mm]



1000-S	V	Ph	Hz	A	kW	Cord & Plug
120V	120	1	50/60	8.0	0.96	NEMA 5-15p 15A-125V plug
208-240V	208	1	50/60	3.5	0.72	NEMA 6-15p 15A-250V plug
	240	1	50/60	4.0	0.96	[U.S.A. only]
230V	230	1	50/60	3.9	0.88	Plugs rated 250V CEE 7/7
						CH2-16p
						BS 1363 [U.K. only]
						AS/NZS 3112



Heat of rejection

1000-S	Heat Gain qs, BTU/hr	Heat Gain qs, kW
	195	0.06

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com