

# SEALED WELL ELECTRIC TABLES

### WITH ENCLOSED BASE







Sealed Well with Drain

| Item #:    | _ Qty #: |
|------------|----------|
| Model #:   |          |
| Project #: |          |



#### **FEATURES:**

Stainless steel undershelf

Fiberglass insulation between each compartment

Drains with gate valves per well

Stainless steel 8" support shelf with removable 3/8" thick poly cutting board - Ships K.D.

#### **MATERIAL:**

**TOP:** 20 gauge #302 stainless steel with die stamped pan openings. (11.875" x 20.062") **BODY:** 22 gauge #430 stainless steel

**BASE:** 18 gauge stainless steel with fully adjustable stainless steel bullet foot

**UNDERSHELF:** 22 gauge #430 stainless steel **LINERS:** 20 Gauge stainless steel deep drawn

with drain

**CUTTING BOARD:** White Thermoplastic **CUTTING BOARD BRACKETS:** 16 gauge,

#302 stainless steel

#### **ELECTRICAL:**

120V units yield 640 Watts 208V/240V dual voltage units yield 825 Watts at 208V and 1100 Watts at 240V 6' electrical cord with plug Infinite control knobs Indicator lights



| Model #      | Length        | Width*  | # of<br>Wells | Volts   | Amps        | Watts     | NEMA<br>Plug | Wt.      | Cu. Ft. |
|--------------|---------------|---------|---------------|---------|-------------|-----------|--------------|----------|---------|
| SW-2E-120-BS | A = 31-13/16" | 30-5/8" | 2             | 120     | 10.67       | 1280      | 5-20P        | 157 lbs. | 28      |
| SW-3E-120-BS | B = 47-1/8"   | 30-5/8" | 3             | 120     | 16          | 1920      | 5-20P        | 154 lbs. | 41.32   |
| SW-4E-120-BS | C = 62-7/16"  | 30-5/8" | 4             | 120     | 21.33       | 2560      | L5-30P       | 187 lbs. | 54.55   |
| SW-2E-240-BS | A = 31-13/16" | 30-5/8" | 2             | 208/240 | 7.94/9.16   | 1650/2200 | 6-20P        | 157 lbs. | 28      |
| SW-3E-240-BS | B = 47-1/8"   | 30-5/8" | 3             | 208/240 | 11.91/13.74 | 2475/3300 | 6-20P        | 154 lbs. | 41.32   |
| SW-4E-240-BS | C = 62-7/16"  | 30-5/8" | 4             | 208/240 | 15.88/18.32 | 3300/4400 | L6-30P       | 187 lbs. | 54.55   |
| SW-5E-240-BS | D = 77-3/4"   | 30-5/8" | 5             | 208/240 | 19.85/22.90 | 4125/5500 | L6-30P       | 281 lbs. | 66.94   |

\*Width Includes 8" Cutting Board

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures

NEMA PLUGS: Your plug will look like this...









NEMA 5-20P NEMA 6-20P N

NEMA L6-30

NOTE: For international applications, plug may need to be replaced (by others) in field.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders:


Email: customer@advancetabco.com or Fax To: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax To: 631-586-2933

### **DIMENSIONS and SPECIFICATIONS**

TOL ± .125" ALL DIMENSIONS ARE TYPICAL

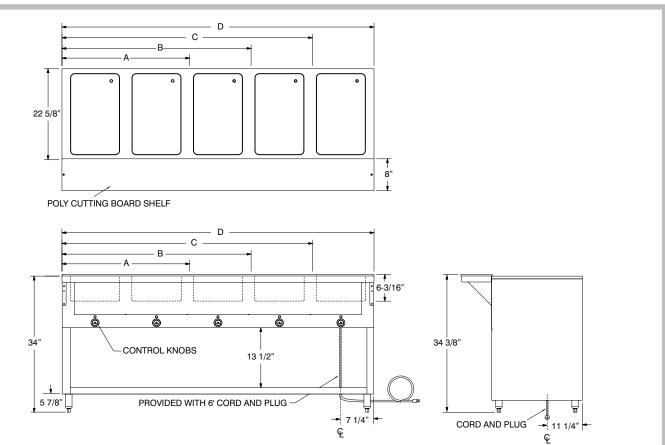

## **Food Table Shelving, Options & Accessories**



| Model | Length    | Approx<br>Wt. | Cu.<br>Ft. |
|-------|-----------|---------------|------------|
| TBS-2 | 31-13/16" | 34 lbs.       | 2          |
| TBS-3 | 47-1/8"   | 42 lbs.       | 3          |
| TBS-4 | 62-7/16"  | 47 lbs.       | 4          |
| TBS-5 | 77-3/4"   | 55 lbs.       | 4          |

with Built-In Food Shield



Acrylic Side Panels for Buffet Shelf

Add side panels to meet additional NSF requirements (2 panels per side)

TBP-1 One Side TBP-2 Two Sides

Field Installation Available

### Visit our website for additional Food Table Accessories



with Built-In Food Shield

| Model | Length    | Approx<br>Wt. | Cu.<br>Ft. |
|-------|-----------|---------------|------------|
| TSS-2 | 31-13/16" | 18 lbs.       | 2          |
| TSS-3 | 47-1/8"   | 23 lbs.       | 3          |
| TSS-4 | 62-7/16"  | 30 lbs.       | 4          |
| TSS-5 | 77-3/4"   | 35 lbs.       | 4          |



Acrylic Side Panel for Serving Shelf

Add side panels to meet additional NSF requirements (1 panel per side)

TSP-1 One Side TSP-2 Two Sides

Field Installation Available



SU-25 Add Casters to Food Units with Undershelf (For Units Built Before Oct. 2015. Includes 4 -5" Swivel Casters, 2 w/ Brakes.)

SU-90 Automatically fills & maintains water level. For DISW, DISLSW, SW & HDSW Series. Requires Manifold Drain Assembly (Except HDSW series).

TCB-OMIT Remove Poly Cutting Board



**SU-45A** 12" x 1" Adapter Bar **SU-45B** 20" x 3" Adapter Bar



-T Thermostatic Control (Per Well)

-M Manifold Drains (Per Well)



REF-V