

COOK-N-HOLD LOW TEMPERATURE RADIANT OVEN 1200CH2EX

FEATURES AND BENEFITS:

- Ovens with two separate compartments and lower profile with two easy to see controls permit menu flexibility.
- Fully insulated Cook-N-Hold gentle radiant oven designed for flavorful results by slow cooking. Slow cooking means 15% to 20% less shrinkage.
- Efficient 6000 Watt power unit allows for reheating of prepared meals or bulk items. Maximum temperature 350°F (176°C).
- Two individual user-friendly solid-state controls with large, high-resolution touchscreen display to ensure holding at precise food temperature.
 - 6.8", high-resolution, glove-safe, high-impact, capacitive touchscreen interface.
 - Large, easy-to-read time/temperature displays.
 - Shelf timers.
 - HACCP data collection with date/time stamp
- 6" meat probe.
- Factory installed cord and plug at no additional charge.
- Cook and hold over 240 lbs. (108 kg.) of meat in just 5 sq. ft. of floor space.
- Non-venting oven, permitted by most local codes, provides easy, inexpensive installation.
- Fully insulated, stainless steel interior for ease of cleaning; stainless steel exterior.
- Oven is operable on either 208 or 240 Volt circuits at the flip of a switch.
- Smooth interior coved corners prevent food particle/grease buildup.
- Field reversible insulated doors prevent temperature loss. Silicone door gaskets for proper seal. High temperature ceramic magnetic latches for "easy open" and security during transport.
- Safety conscious anti-microbial latches protect against spreading germs. Standard with right hand hinging; left hand hinging available upon request.
- Sixteen sets of stainless steel wire universal angles accommodate a large variety of pan sizes on adjustable 1-1/2" centers.
- Heavy duty 5" swivel modulus casters, two with brakes. Provides mobility when fully loaded.

POWER UNIT OPTIONS:

6000 Watts, 208/240 Volts, 1 Phase, 60 Hz.

6000 Watts, 208/240 Volts, 3 Phase, 60 Hz.



1200CH2EX



Deluxe Touchscreen Control

- HACCP data collection with date/time stamp
- Shelf timers • Programmable recipes
- One-Touch button recipes


ACCESSORIES and OPTIONS (Available at extra cost):

- ☐ Optional 3" food probe
- ☐ Additional Probes
- ☐ Tempered Glass Door Window
- ☐ Key Lock Latches
- ☐ Perimeter Bumper
- ☐ Corner Bumpers
- ☐ Various Caster Options

Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Customer Service.

If you need a QR reader visit your App Store on your Smartphone or Tablet.



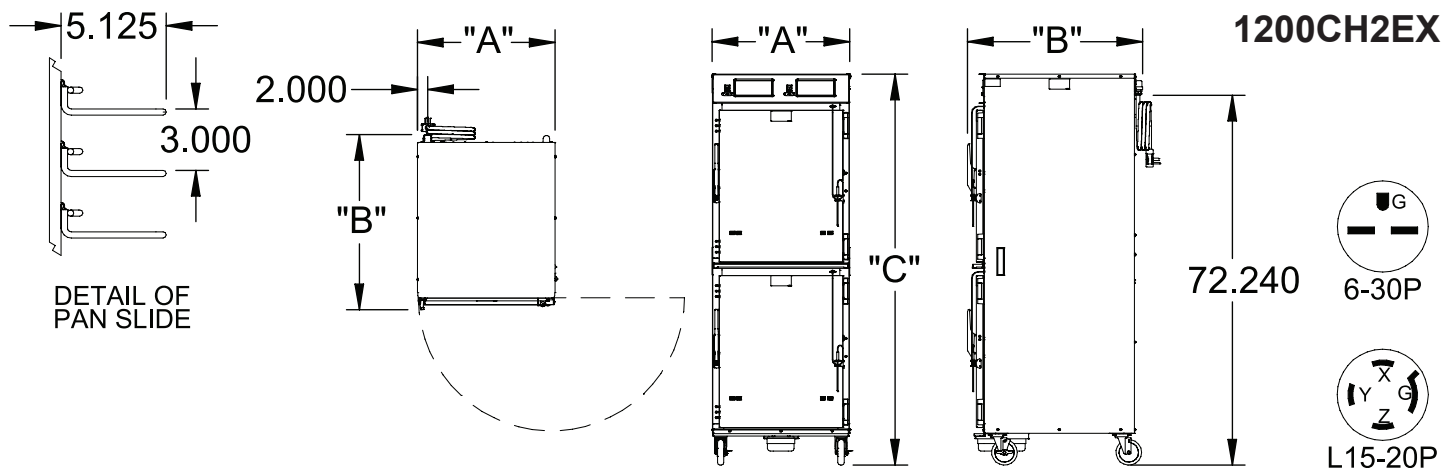

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
1200CH2EX	16	18 x 26	IN	26-7/8	34-1/8	76-3/8	23	27	28-3/4	LBS	400
		460 x 660	MM	682	867	1940	584	690	730	KG	182
	32	12 x 20	IN	*Inside dimensions for each compartment. When ordering bumpers, add 3-11/16" to DIM "A" and 3/8" to DIM "B".							
		305 x 510	MM								

CABINETS:

- Outer Body: 22 ga. stainless steel.
- Inner body & top: 18 ga. stainless steel.
- Reinforcements: Internal framework of 16 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F, 1-1/2" in walls, 1" in doors.
- Drip pan: 18 ga. stainless steel with drain; removable.
- Casters: 5" dia., swivel modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

DOORS:

- Field reversible.
- Formed 20 ga. stainless steel.
- Latches: Anti-microbial chrome plated zinc with composite handle, ceramic magnetic type; mounted inboard.
- Hinges (4): Heavy duty chrome plated zinc; mounted inboard
- Gaskets: Perimeter type, silicone.
- Adjustable vents.

PAN SLIDES:

- Wire angles (.306 dia.), stainless steel, mounted on lift-off posts.
- Adjustable on 1-1/2" centers.
- Grids: Stainless steel, 18 x 26; supplied with (3) grids per compartment.

CLEARANCE REQUIREMENTS:

- 3" (76mm) at the back, 2" (51mm) at the top, 1" (25mm) at both sides.

POWER REQUIREMENTS:

- 6000 Watts, 208/240 Volts, 60 Hz., 1 phase, 30 Amp. Service 28.8 Amps at 208 Volts, 25 Amps at 240 Volts.
- 6000/Watts, 208/240 Volts, 60 Hz., 3 phase, 20 Amp. Service 16.6 Amps at 208 Volts, 14.4 Amps at 240 Volts.

ELECTRICAL COMPONENTS:

- Temperature Controls (2) each with:
 - 6.8" high-resolution, glove-safe, high impact, capacitive touchscreen interface.
 - Programmable recipes.
 - One-Touch button recipes.
 - Shelf timers.
 - HACCP data collection.
 - Temperature range: 135°F (57°C) to 350°F (176°C).
- USB ports with covers (2).
- Switches: ON-OFF rocker type (2).
- Solid-state relays (2).
- Power cord: Permanent, 6 ft., 10/3 ga., with right angle plug.
- Three (3) heater circuits each compartment.
- Voltage selector switch: Change to 208 or 240 Volt; on back of oven.

INSTALLATION REQUIREMENTS:

- This model complies with section 59 of UL710B for emissions of grease laden air, and according to UL is not required to be placed under a ventilation hood. Check local requirements before installation.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Radiant Oven Model 1200CH2EX; Touchscreen, Solid state electronic controlled times and temperatures. Outer body of 22 ga. stainless steel. Inner body and top of 18 ga. stainless steel. Fiberglass insulation 1-1/2" in walls; 1" in door. Stainless steel internal frame; coved corners. Anti-microbial chrome plated latches. Separate touchscreen control for each compartment. Six (6) heated inner walls. Removable pan supports for (16 or 8) 18" x 26" pans spaced on 3" centers. Casters: 5" swivel modulus casters. Delrin bearings. Load capacity 250 lbs. each. 6000 Watts, 208/240 Volts, 60 Hz., _____ Phase. 2-Year Parts / 1-Year Labor warranty. Lifetime on heating elements (excluding labor). Provide the following accessories: _____
 _____ CSA-US, CSA-C, CSA to NSF4 listed.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRES COR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 2026 All rights reserved.



WARRANTY
 2-Year Parts,
 1 Year Labor

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Made in America Since 1936