

## 20-20MW, 20-20W

COMPANION HOLDING CABINET



20-20MW



- HALO HEAT . . . a controlled, uniform heat source that gently surrounds food to provide a better appearance, taste, and longer holding life.
- Uses one-third to one-half the energy of conventional holding equipment.
- Motionless air inside cabinet prevents transfer of flavors, retains more product moisture, and preserves color.
- Close temperature tolerance, along with even heat distribution, maintains an ideal serving temperature throughout the cabinet.
- Optional roll in pan cart (trolley)
  - Twenty (20) non-tilt support rails hold twenty (20) full-size sheet pans, forty (40) full-size hotel or GN 1/1 pans, two rows deep; 13" (330mm) horizontal width between rails, 2-9/16" (65mm) vertical spacing between rails.
  - Interchangeable with the 20-20 Combitherm® ovens, and the Alto-Shaam Quickchiller™ QC2-100.
  - Includes removable handle; six (6) stainless steel wire shelves for sheet pans; two (2) rigid casters and two (2) swivel casters with brake.

Insulated Halo Heat companion holding cabinet features stainless steel construction. Each cabinet is controlled by one (1) ON/OFF power switch; Up and Down Arrow Keys with a temperature range of 60° to 200°F (16° to 93°C); heat indicator light; temperature display key, and digital display. The door has a heavy duty rotary handle with standard left-hand hinging.

- ☐ **MODEL 20-20MW:** Mobile holding cabinet supported by four (4) heavy duty casters, two rigid, two swivel with brake. Includes push/pull handles and exterior bumper.
- ☐ **MODEL 20-20W:** Stationary holding cabinet supported by four (4) heavy equipment adjustable legs

### FACTORY INSTALLED OPTIONS


- Electrical Choices
  - ☐ 208-240V
  - ☐ 230V
- Door Choices
  - ☐ Left-hand swing, standard
  - ☐ Right-hand swing, optional
- Trolley to be used
  - ☐ fits 20-20 cart
  - ☐ fits 20-10 cart




ANSI/NSF 4



IP X4

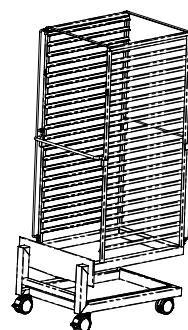

OPTIONAL ROLL-IN  
PAN CART

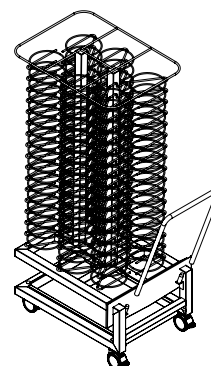

OPTIONAL ROLL-IN  
PLATE CART



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA


FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

[www.alto-shaam.com](http://www.alto-shaam.com)



# 20-20MW, 20-20W



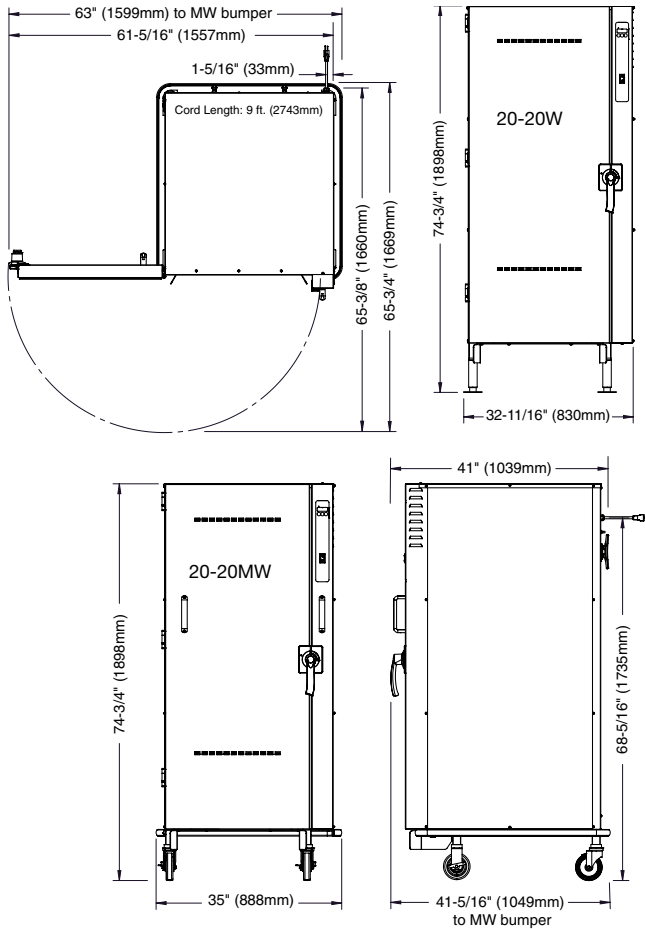

COMPANION HOLDING CABINET



## DIMENSIONS (H X W X D)

20-20MW:	74-3/4" x 35" x 41-5/16" (1898mm x 888mm x 1049mm)
20-20W:	74-3/4" x 32-11/16" x 41" (1898mm x 830mm x 1039mm)
Interior:	59-1/4" x 24-3/16" x 33-5/16" (1505mm x 614mm x 846mm)

## ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG
208	1	50/60	10.8	2.2	 NEMA 6-15P 15A-250V Plug
240	1	50/60	12.5	3.0	
230	1	50/60	12.0	2.8	 CEE 7/7 PLUG RATED 250V  CH2-16P PLUG RATED 250V  BS 1363 (U.K. ONLY) PLUG RATED 250V

## ROLL-IN PAN CART PRODUCT/PAN CAPACITY

480 lbs (218 kg) MAXIMUM
VOLUME MAXIMUM: 300 QUARTS (284 LITERS)
FULL-SIZE PANS: Forty (40) 20" x 12" x 2-1/2" MAXIMUM
GN 1/1: Forty (40) (530mm x 325mm x 65mm)
GN 2/1: Twenty (20) (650mm x 530mm x 65mm)
FULL-SIZE SHEET PANS: Ten (10) 18" x 26" x 1"
Twenty (20) with added shelves

## OPTIONS & ACCESSORIES

<input type="checkbox"/> Preheat Sealing Strip	5016989
<b>Roll-In Pan Carts (H X W X D)</b>	
<input type="checkbox"/> 20 SHELF PAN TROLLEY - Fits 20-20E, 20-20G, 20-20MW, and QC2-100	5014652
69-1/2" x 26-7/8" x 34-1/2" (1766 x 683 x 877mm)	5017148 (CI)
2-9/16" (65mm) VERTICAL SPACING BETWEEN SHELVES	
<input type="checkbox"/> 20 SHELF PAN TROLLEY - Fits 20-10E, 20-10G, 20-20MW, and QC2-100	5015049
69-1/2" x 18-3/4" x 29-13/16" (1766 x 475 x 757mm)	5017149 (CI)
2-9/16" (65mm) VERTICAL SPACING BETWEEN SHELVES	
<b>Roll-In Plate Carts (H X W X D)</b>	
<input type="checkbox"/> 102 PLATE TROLLEY - Fits 20-20E, 20-20G, 20-20MW, and QC2-100	5016478
69-5/8" x 26-7/8" x 42-1/2" (1769 x 683 x 1080mm)	5017150 (CI)
3" (77mm) VERTICAL SPACING BETWEEN SHELVES	
<input type="checkbox"/> 84 PLATE TROLLEY - Fits 20-20E, 20-20G, 20-20MW, and QC2-100	5016480
69-5/8" x 26-7/8" x 42-1/2" (1769 x 683 x 1080mm)	5017151 (CI)
3-11/16" (93mm) VERTICAL SPACING BETWEEN SHELVES	
<input type="checkbox"/> 60 PLATE TROLLEY - Fits 20-10E, 20-10G, 20-20MW, and QC2-100	5016489
69-13/16" x 18-3/4" x 37-1/8" (1773 x 475 x 943mm)	5017153 (CI)
2-9/16" (66mm) VERTICAL SPACING BETWEEN SHELVES	
<input type="checkbox"/> 51 PLATE TROLLEY - Fits 20-10E, 20-10G, 20-20MW, and QC2-100	5016490
70" x 18-3/4" x 37-1/8" (1778 x 475 x 943mm)	5017154 (CI)
3-1/16" (77mm) VERTICAL SPACING BETWEEN SHELVES	
<input type="checkbox"/> Shelf, Stainless Steel 25-1/8" x 20-7/8" (638 x 529mm)	SH-22473

CI - CORRECTIONAL INSTITUTION

## WEIGHT

NET	419 lb (190 kg)
SHIP	538 lb (244 kg)
CARTON DIMENSIONS: (L X W X H)	
56" x 46" x 87"	
(1422mm x 1168mm x 2210mm)	

## INSTALLATION REQUIREMENTS

Cabinet must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

## CLEARANCE REQUIREMENTS

BACK	3" (76mm)
TOP	2" (51mm)
EACH SIDE	1" (25mm)