

HSM Series Heated Shelf Merchandiser

ALTO-SHAAM

Featuring exclusive Halo Heat® fanless technology, Alto-Shaam heated shelf merchandisers provide precise, even heating for the highest quality food and lowest cost of ownership.

The HSM holds a variety of grab-and-go products, including rotisserie chickens, pizza, sandwiches, and more. Improve store profits with hot, ready-to-eat meals. Convenient, fresh meals are displayed in an aesthetically pleasing, customizable merchandiser.

Experience better quality food with gentle, even and precise Halo Heat® fanless technology to keep food from drying out.

Flexibility to control individual shelf temperatures allows you to hold a variety of products at the proper temperature.

Boost impulse sales with LED-lighted shelves, backlit interchangeable graphics, and pricing rails.

Simple operation and easy cleaning keeps delis and grab-and-go areas operating smoothly.

Lowest cost of ownership on the market – cost savings of 50% compared to traditional models.

Easy-to-load shelves – pass-through option available for added convenience.

Made in the USA with a commitment to quality. Alto-Shaam is ISO 9001:2015-certified.

Standard Features

- Adjustable thermostat with a heat-on indicator light
- Latched access panel on the front of the merchandiser
- Four (4) 3" (76mm) casters

Capacity



- 16** **HSM-24/4S:** Four (4) 20-7/8" (530mm) width shelves, four (4) chicken boats with dome cover per shelf.
- 24** **HSM-36/4S:** Four (4) 32-7/8" (835mm) width shelves, six (6) chicken boats with dome cover per shelf.
- 40** **HSM-48/4S:** Four (4) 44-7/8" (1140mm) width shelves, ten (10) chicken boats with dome cover per shelf.



HSM-24/4S:	64 lb (29 kg)	16 lb (7 kg) per shelf
HSM-36/4S:	96 lb (44 kg)	24 lb (11 kg) per shelf
HSM-48/4S:	160 lb (73 kg)	40 lb (18 kg) per shelf



HSM-36/4S

Images include optional accessory signage panels

HSM-24/4S

Configurations (select one)

Models

- ☐ HSM-24/4S
- ☐ HSM-36/4S
- ☐ HSM-48/4S (not shown)

Electrical

- ☐ 208-240V, 1PH
- ☐ 230V, 1 PH

Style

- ☐ Reach-in
- ☐ Pass-through

Door Options

- ☐ None (reach-in models only)
- ☐ Rear slide (pass-through models only)
- ☐ Rear swing (pass-through models only)
- ☐ Front swing (reach-in and pass-through models)

Casters or Legs

- ☐ 3" (76mm) casters for floor standing application (Standard)
- ☐ 6" (152mm) feet for floor standing application (FE-27153)

Accessories (select all that apply)

Unit ships without graphics unless selected

- ☐ Signage panel, POP Display
- ☐ Signage panel, shelf – Rotisserie Chicken
- ☐ Signage panel, shelf – Hot Sandwiches
- ☐ Signage panel, shelf – Barbecue Ribs
- ☐ Signage panel, shelf – Hot & Tasty
- ☐ Signage panel, shelf – Grab & Go
- ☐ Signage panel, shelf – Hot & Fresh

qty

Shelf insert for magnetic signage panels

Magnetic signage panels to be provided by customer.

- HSM-24 - ☐ Stainless Steel (1027304) ☐ Black (PE-46057)
- HSM-36 - ☐ Stainless Steel (1027305) ☐ Black (PE-46058)
- HSM-48 - ☐ Stainless Steel (1027306) ☐ Black (PE-46059)



Wire shelf

- ☐ HSM-24 (SH-46066) ☐ HSM-36 (SH-46067) ☐ HSM-48 (SH-46068)

HSM Series Heated Shelf Merchandiser




Dimension Drawings

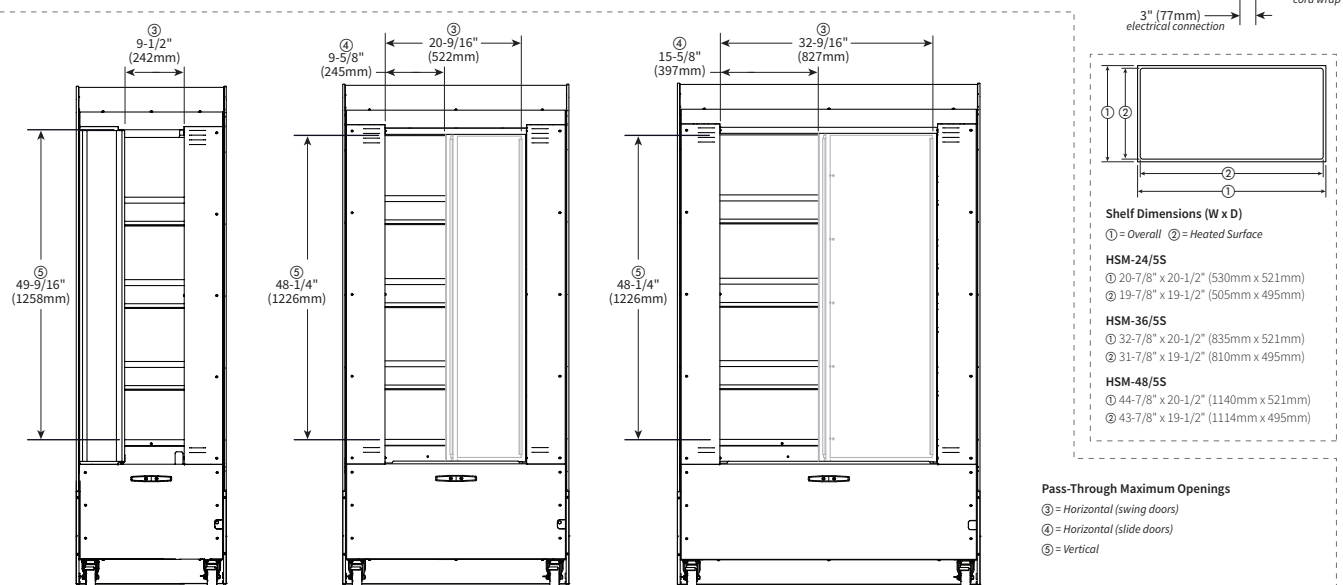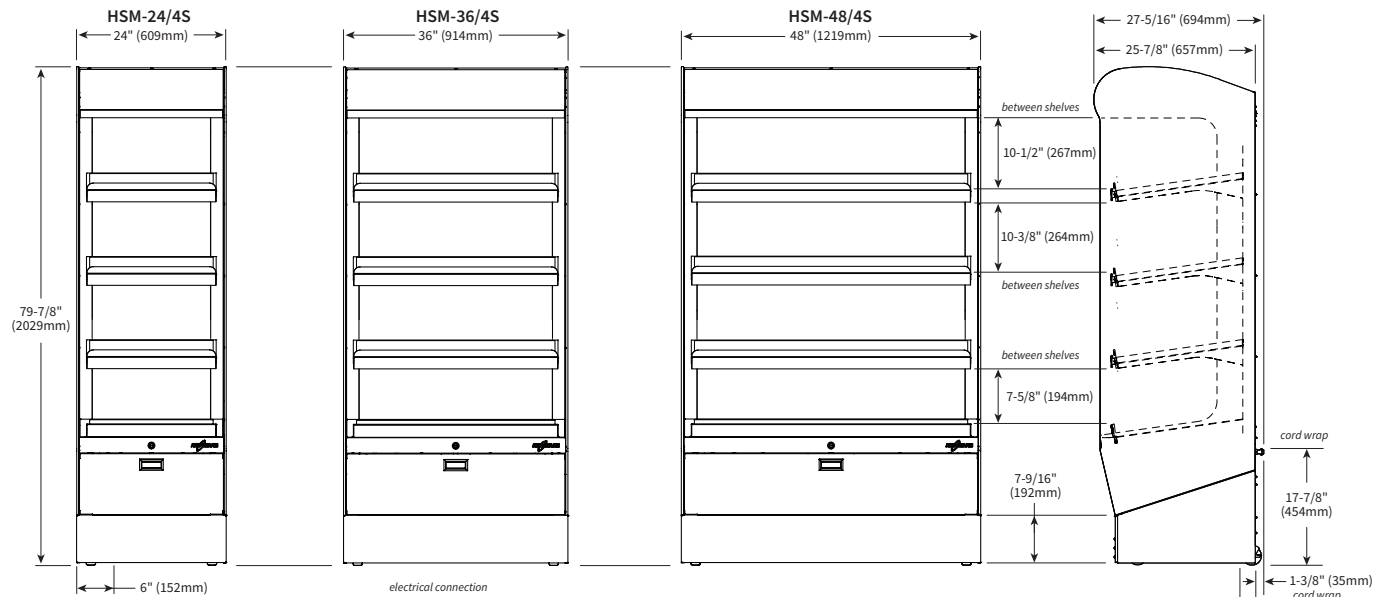

Pass-Through Maximum Openings

- ③ = Horizontal (swing doors)
- ④ = Horizontal (slide doors)
- ⑤ = Vertical

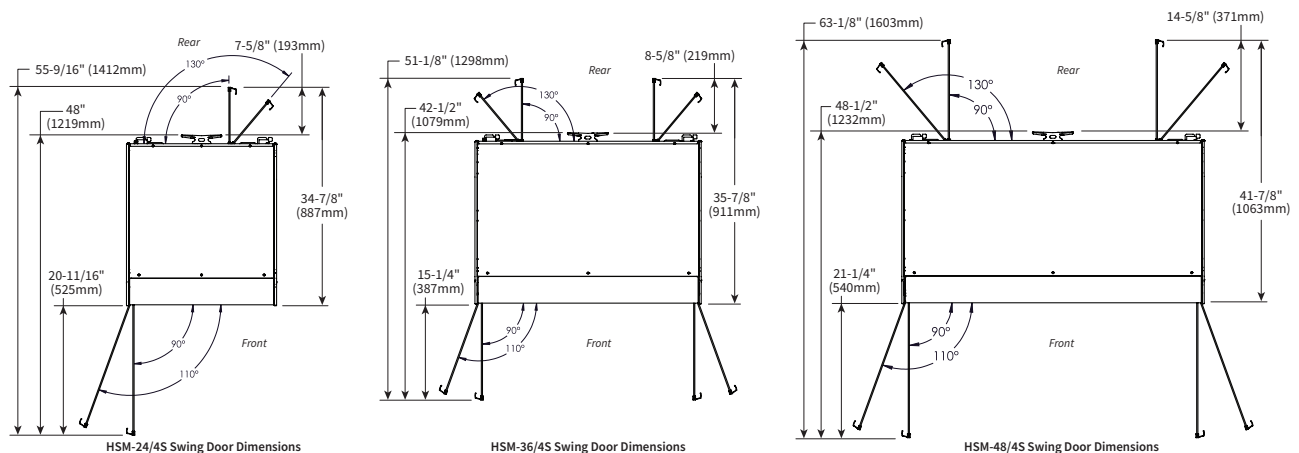

HSM Series Heated Shelf Merchandiser



Specifications



CHECK FIRST

- Merchandiser must be installed level.
- Merchandiser must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- In order to maintain NSF standards, floor models must be equipped with casters or 6" (152mm) legs.



CLEARANCE

Rear: 4" (102mm)

Recommended: 18" (457mm) for service access. Charges in connection with inadequate service access are not covered under warranty.



DIMENSIONS


Model	Exterior (H x W x D)	Net Weight
HSM-24/4S	79-7/8" x 24" x 27-5/16" (2029mm x 609mm x 694mm)	395 lb (179 kg)
HSM-36/4S	79-7/8" x 36" x 27-5/16" (2029mm x 914mm x 694mm)	485 lb (220 kg)
HSM-48/4S	79-7/8" x 48" x 27-5/16" (2029mm x 1219mm x 694mm)	555 lb (252 kg)
	Ship Dimensions (L x W x H)*	Ship Weight*
HSM-24/4S	36" x 36" x 84" (914mm x 914mm x 2134mm)	490 lb (222 kg)
HSM-36/4S	56" x 45" x 87" (1422mm x 1143mm x 2210mm)	586 lb (266 kg)
HSM-48/4S	56" x 63" x 89" (1422mm x 1600mm x 2261mm)	690 lb (313 kg)

*Domestic ground shipping information. Contact factory for export weight and dimensions.



ELECTRIC

	V	Ph	Hz	A	kW	Plug Configuration
HSM-24/4S	208 – 240	1	60	8.7 – 10.0	1.8 – 2.4	NEMA 6-15P (15A, 250V)
	230	1	50/60	9.0	2.2	CEE 7/7 CH2-16P BS 1363 AS 3112
HSM-36/4S	208 – 240	1	60	11.6 – 13.3	2.4 – 3.2	NEMA 6-20P (20A, 250V)
	230	1	50/60	12.0	2.7	CEE 7/7 CH2-16P AS 3112
HSM-48/4S	208 – 240	1	60	15.5 – 17.9	3.2 – 4.3	cord, no plug
	230	1	50/60	15.7	3.6	cord, no plug

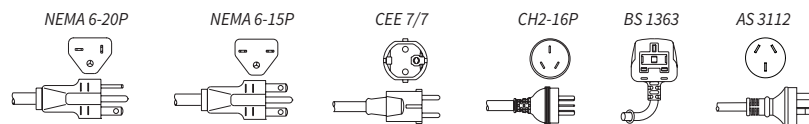

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com