



HEARTHBAKE SERIES COUNTERTOP ELECTRIC OVENS

SERIES: P22S & P22-BL



Bakers Pride® P22 series ovens are a great choice for fresh-dough pizza, prebaked crust, pretzels, flat breads, and other bakery products. Bake directly on the deck or on screens, pans, or baking sheets. This series features one baking chamber with two decks and your choice of Cordierite (3.25" deck height) or brick-lined Cordierite (2.75" deck height). The brick-lined model has a Cordierite ceiling, which offers the benefit of increased temperatures and recovery times. They may be easily installed at the factory or in the field.

All models feature stainless steel exteriors, 4" adjustable legs, and a 15-minute electric timer with continuous-ring alarm and manual shut-off. International voltages are available.

FEATURES AT A GLANCE

- 208 V or 220/240 V @ 3600 watts, single or three phase
- Independent top and bottom controlled incoloy heating elements
- Cordierite or brick-lined
- 300–650°F (149–343°C) temperature range
- 15-minute electric timer with continuous-ring alarm and manual shut-off
- Single baking chamber
- 2.75" (70 mm) or 3.25" (83 mm) deck height
- Two 20.75" (527 mm) sq. decks
- All stainless steel exterior
- High-heat, fully welded, aluminized steel baking chamber
- Fully insulated
- 6' (1829 mm) cord and plug
- 4" (102 mm) adjustable legs
- One-year limited warranty

OPTIONS & ACCESSORIES


- Stainless steel stand (with or without casters)
- International voltages
- Brick-lined conversion kit (standard on P22BL)
- Glass window in doors
- Deck brush and scraper
- Stacking kits
- Steel deck
- Lightstone deck




HEARTHBAKE SERIES COUNTERTOP ELECTRIC OVENS

SERIES: P22S & P22-BL


EQUIPMENT DIMENSIONS



Front VIEW

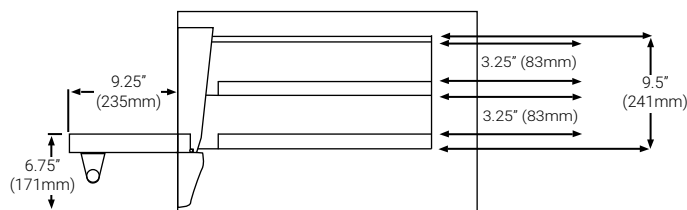

SIDE VIEW

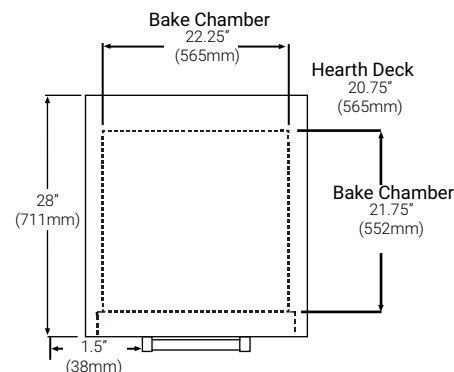

TOP VIEW

MECHANICAL SPECIFICATIONS

| Model # | Overall Dim (W x H x D)* | Deck Height | Deck Size (W x D) | Decks | Baking Chambers | Thermostat Range | Carton Dim (W x H x D) | Cubic Feet | Cubic Meter | Ship Wt. |
|---------|--------------------------------------|----------------|--------------------------------|-------|--------------------|---------------------------|--|---------------|----------------|---------------|
| P22S | 26" x 17" x 28" (660 x 432 x 711) | 3.25" (83) | 20.75" x 20.75" (527 x 527) | 2 | 1 | 300°-650°F (149-343°C) | 32" x 22.5" x 30.5" (813 x 572 x 775) | 12.7 | .37 | 160 (73kg) |
| P22-BL | 26" x 17" x 28" (660 x 432 x 711) | 2.75" (70) | 20.75" x 20.75" (527 x 527) | 2 | 1 | 300°-650°F (149-343°C) | 32" x 22.5" x 30.5" (813 x 572 x 775) | 12.7 | .37 | 165 (75kg) |

*Height excludes legs

POWER SUPPLY

| Model # | Watts | Voltage | Phase | Amps | Plug Style | | | |
|---------|-------|---------|-------|------|------------|--------|-----|-----------|
| | | | | | USA | Canada | UK | Europe |
| P22S | 3600 | 208 | 1 | 17.3 | 6-20P | 6-30P | N/A | CEE7-VIII |
| P22-BL | | | 3 | 12.1 | | | | |
| P22S | 3600 | 220/240 | 1 | 17.1 | 6-20P | 6-20P | N/A | CEE7-VIII |
| P22-BL | | | 3 | 12.0 | | | | |

REQUIRED CLEARANCES

Left 3" (76 mm)
Right 3" (76 mm)
Back 3" (76 mm)

In European Community Countries and North America. In NON-COMBUSTIBLE locations only.

In European Community Countries only in COMBUSTIBLE locations. NOT for North America.



5-15P



6-15P



5-20P



BS1363 A



CEE 7-VII



Freight Class: 110
FOB: Allen, 75013

Bakers Pride Oven Company, LLC is a wholly owned subsidiary of Standex International Corporation.

Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

11.13.2017

