

LINE:	POSTAL AND PACKAGING SCALES
--------------	------------------------------------



MODEL:	SR-50/100
---------------	------------------



USE	CAPACITIES AND DIMENSIONS	
<ul style="list-style-type: none"> •Shipping departments •Shipping and mailing services •Post offices •Storage companies •Etc 	MODEL	SR- 50/100
	Capacity	50 kg/ 100 lb
	Minimum division	0.01kg /0.02 lb
	Plate Dimensions	10"X13" (25.4 X 33 cm)

BENEFITS
<ul style="list-style-type: none"> • Spiral cable to move the indicator where you need it. • Heavy duty use • Toggles between kg and lb • PC or Printer communication function • Operates with rechargeable battery (Approximately 24 hours) or electrical power supply.

LINE:	POSTAL AND PACKAGING SCALES
MODEL:	SR-50/100

BENEFITS	SPECIFICATIONS																												
 BUILT TO LAST Its solid structure and design, guarantee years of continuous trouble free operation.	<table> <tr><td>Capacity</td><td>50kg/100kg</td></tr> <tr><td>Minimum division</td><td>0.01kg/0.02lb</td></tr> <tr><td>Display</td><td>Liquid crystal display</td></tr> <tr><td>Serial port</td><td>Included</td></tr> <tr><td>Rechargeable Battery</td><td>Included (24 hours approx.)</td></tr> <tr><td>Maximum tare</td><td>50 kg/100lb</td></tr> <tr><td>Plate Dimensions</td><td>10"X13" (25.4X 33cm)</td></tr> <tr><td>Backlight</td><td>Included</td></tr> <tr><td>Car lighter adapter</td><td>Optional</td></tr> <tr><td>Power Supply</td><td>110v/60hz (220v/50 hz Optional)</td></tr> <tr><td>Operation temperature</td><td>14 to 104 °F (-10 to 40 °C)</td></tr> <tr><td>Storage Temperature</td><td>-4 to 122 °F (-20 to 50 °C)</td></tr> <tr><td>Net weight</td><td>11.5 lb / 5.2 kg</td></tr> <tr><td>Shipping weight</td><td>15 lb / 6.8 kg</td></tr> </table>	Capacity	50kg/100kg	Minimum division	0.01kg/0.02lb	Display	Liquid crystal display	Serial port	Included	Rechargeable Battery	Included (24 hours approx.)	Maximum tare	50 kg/100lb	Plate Dimensions	10"X13" (25.4X 33cm)	Backlight	Included	Car lighter adapter	Optional	Power Supply	110v/60hz (220v/50 hz Optional)	Operation temperature	14 to 104 °F (-10 to 40 °C)	Storage Temperature	-4 to 122 °F (-20 to 50 °C)	Net weight	11.5 lb / 5.2 kg	Shipping weight	15 lb / 6.8 kg
Capacity	50kg/100kg																												
Minimum division	0.01kg/0.02lb																												
Display	Liquid crystal display																												
Serial port	Included																												
Rechargeable Battery	Included (24 hours approx.)																												
Maximum tare	50 kg/100lb																												
Plate Dimensions	10"X13" (25.4X 33cm)																												
Backlight	Included																												
Car lighter adapter	Optional																												
Power Supply	110v/60hz (220v/50 hz Optional)																												
Operation temperature	14 to 104 °F (-10 to 40 °C)																												
Storage Temperature	-4 to 122 °F (-20 to 50 °C)																												
Net weight	11.5 lb / 5.2 kg																												
Shipping weight	15 lb / 6.8 kg																												
 EASY TO USE So simple to use that anyone can operate it with only a minute training																													

OPTIONAL ACCESSORIES



Car lighter adapter to plug in the scale

OPERATES ANYWHERE

The SR 50/100 operates anywhere with a rechargeable battery (24Hrs, approx.)
Power supply adapter



PC COMMUNICATION FUNCTION

Includes PC or printer interface through RS-232 serial port




EASY TO READ DISPLAY

Just place the product on the platform and instantly read the weight on the display, backlight included to enhance visibility in dark areas. Saves time and money.



DIMENSIONS

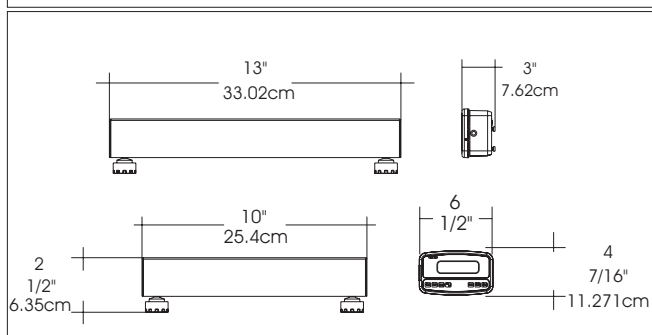

DISTRIBUTED BY



ALL INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE