

GF Series Glass Froster



www.AvantcoRefrigeration.com

MODEL #178GF25HC

GF SERIES - GLASS FROSTER

Frost craft beer glasses or cool plates before service.

CABINET CONSTRUCTION

Heavy-duty black coated steel exterior with a white painted aluminum interior. Stainless steel sliding door for easy access. Door lock protects contents inside.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant.

SHELVING

4 epoxy-coated steel shelves included to hold plates or glasses.

MODEL FEATURES

Digital controller features auto-defrost function. Not intended for the storage or display of perishable materials.

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- 4 epoxy-coated steel shelves for glasses or plates
- Sliding stainless steel door for easy access
- Maintains temperatures between -5 and -2° F
- Easy-to-use, digital temperature controls
- Foamed-in-place polyurethane insulation
- Black coated steel exterior
- Painted aluminum interior
- Auto defrost for easy maintenance
- 115V, 1/5 hp



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



GF Series Glass Froster

MODEL #178GF25HC



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|--------------------|
| Exterior Dimensions | 26"W x 28"D x 34"H |
| Interior Dimensions | 22"W x 23"D x 26"H |
| Net Volume | 4.1 cu. ft. |
| Net Weight | 125 lb. |
| Gross Weight | 158 lb. |
| Packaging Dimensions | 32"W x 33"D x 42"H |

Cooling

| | |
|--------------------------|-----------|
| Temperature Range | -5 - 2°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/5 |



Construction

| | |
|---------------------|------------------------------|
| Exterior Material | Black Plastic Coated Steel |
| Interior Material | Painted Aluminum |
| Insulation Material | Foamed-In-Place polyurethane |
| Shelves | (4) 9¾" x 22" |
| Shelf Material | Epoxy Coated Steel |
| Shelf Load Capacity | 40 lb. |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 3.3 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 90" |

PLAN VIEW

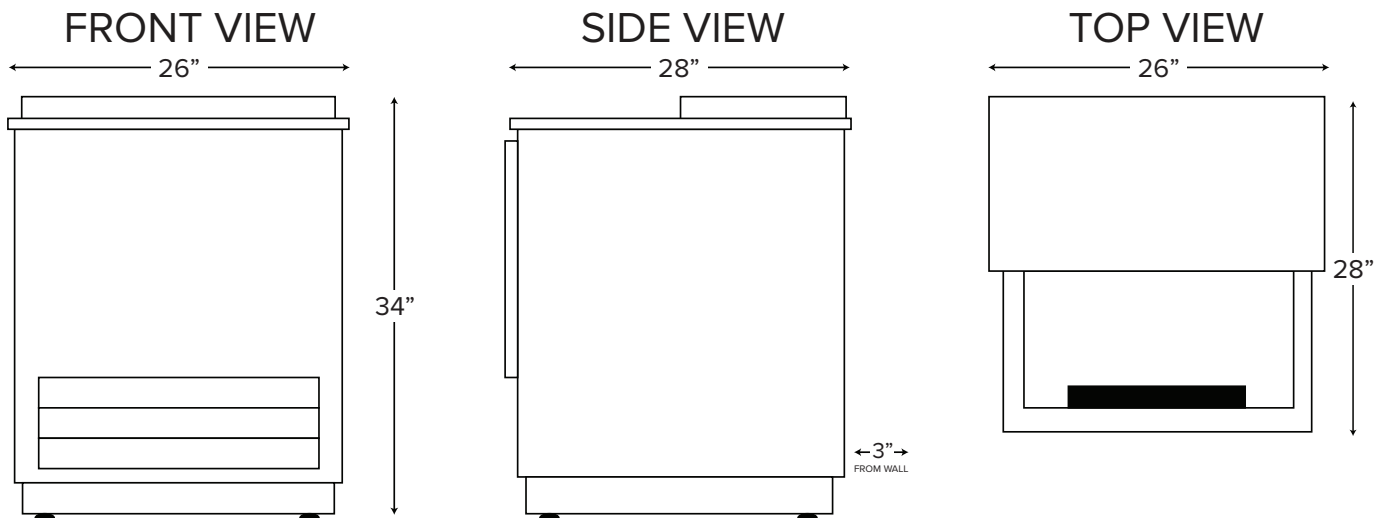

NEMA 5-15P