



# SSUC Series

## ADA Undercounter Freezer

**MODELS #178SSUC36FA**

### CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance. Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing. 2 doors features easy-to-use full-length stainless steel handles for quick interior access. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

### REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

### SHELVING

2 white epoxy-coated steel shelves included. Each accommodate up to 90 lb.

### MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion. Interior wall-mounted thermometer for easy temperature monitoring. Preprogrammed digital controller features auto-defrost function.

PROJECT: \_\_\_\_\_  
MODEL: \_\_\_\_\_ SERIAL#: \_\_\_\_\_  
ITEM #: \_\_\_\_\_ QUANTITY: \_\_\_\_\_  
APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

### SSUC SERIES - UNDERCOUNTER FREEZER

Increase cold food prep storage in your kitchen

### SPECIAL FEATURES

- ADA compliant working height
- Strong and sleek 430 type stainless steel exterior and 304 stainless steel interior for maximum corrosion resistance
- Foamed-in-place polyurethane insulation helps maintains food safe temperatures of (-8)°F - (-1)°F
- Easy-to-read digital temperature controller with auto defrost function
- Full-length stainless steel door handle for increased accessibility
- Two epoxy-coated steel shelf accommodates up to 90 lb. each
- Eco-friendly R290 hydrocarbon refrigerant
- 120V; 1/4 hp



### WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



★ Conforms to UL & NSF-7 Standards



### TECHNICAL DATA

#### Dimensions

Exterior Dimensions	36¼"W x 29½"D x 33⅝"H
Interior Dimensions	33"W x 22⅞"D x 23½"H
Working Height	33⅝"
Net Volume	8.2 cu. ft.
Net Weight	198 lb.
Gross Weight	243 lb.
Packaging Dimensions	39"W x 32¼"D x 38½"H
BTU (BTU/HR)	668

#### Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Insulation Material	Foamed-in-Place Polyurethane
Shelf Size	(2) 15⅞" x 17⅛"
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

#### Cooling


Temperature Range	(-8)°F - (-1)°F
Refrigerant	R290
Max. Ambient Temperature	100°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/4

#### Electrical


Voltage	120
Amps	2.8
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	84"

### PLAN VIEW



FRONT VIEW

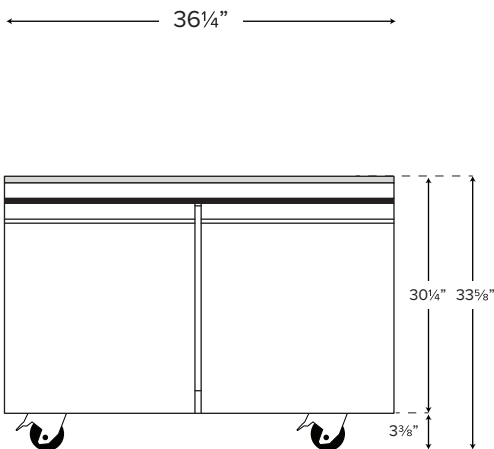

SIDE VIEW

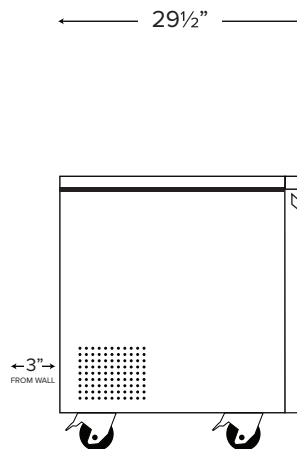

TOP VIEW

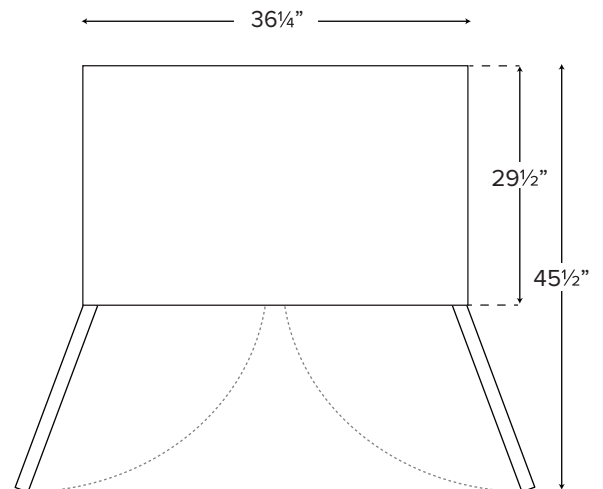

NEMA 5-15P