



SSUD Series Undercounter Refrigerator

MODEL #178SSUD1R

CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance. Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing.

Door features easy-to-use recessed handles for quick interior access. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance and tight kitchen spaces.

SHELVING

1 white epoxy-coated steel shelf included. It accommodates up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.

Deeper style cabinet allows for more storage room.

PROJECT: _____

MODEL: _____ SERIAL#: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

SSUD SERIES – UNDERCOUNTER REFRIGERATOR

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperatures from 33°F - 40°F
- One epoxy-coated steel shelf accommodates up to 90 lb.
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- Casters for easy mobility
- 115V; 1/6 hp



WARRANTY

RESIDENTIAL: Avantco assumes no liability parts or labor coverage for component failure, factory defect or any other damages for unit installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



★ Conforms to UL & NSF-7 Standards





SSUD Series Undercounter Refrigerator

MODELS #178SSUD1R

TECHNICAL DATA

Dimensions

Exterior Dimensions	44½"W x 31½"D x 34⅞"H
Interior Dimensions	22¼"W x 26⅜"D x 22⅞"H
Depth with Door Open	55⅞"
Net Volume	215L / 7.6CU.FT
Net Weight	176lbs
Gross Weight	209lbs
Packing Dimensions	47¼"W x 34¼"D x 36¼"H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290/ 85g
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Electronic
Horsepower	1/6
BTU (BTU/hr)	501



Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Door Type	Solid Hinged
Insulation Material	Foamed-in -place polyurethane
Shelves	1
Shelf Size	(1) 23⅛" x 24⅔"
Shelf Material	Epoxy Coated Steel
Shelf Load Capacity	90lbs/pc

Electrical

Voltage	115
Amps	4
Hz	60
Phase	1
Plug Type	NEMA 5-15P (UL)
Electrical Cord Length	8' 2⅞"

PLAN VIEW

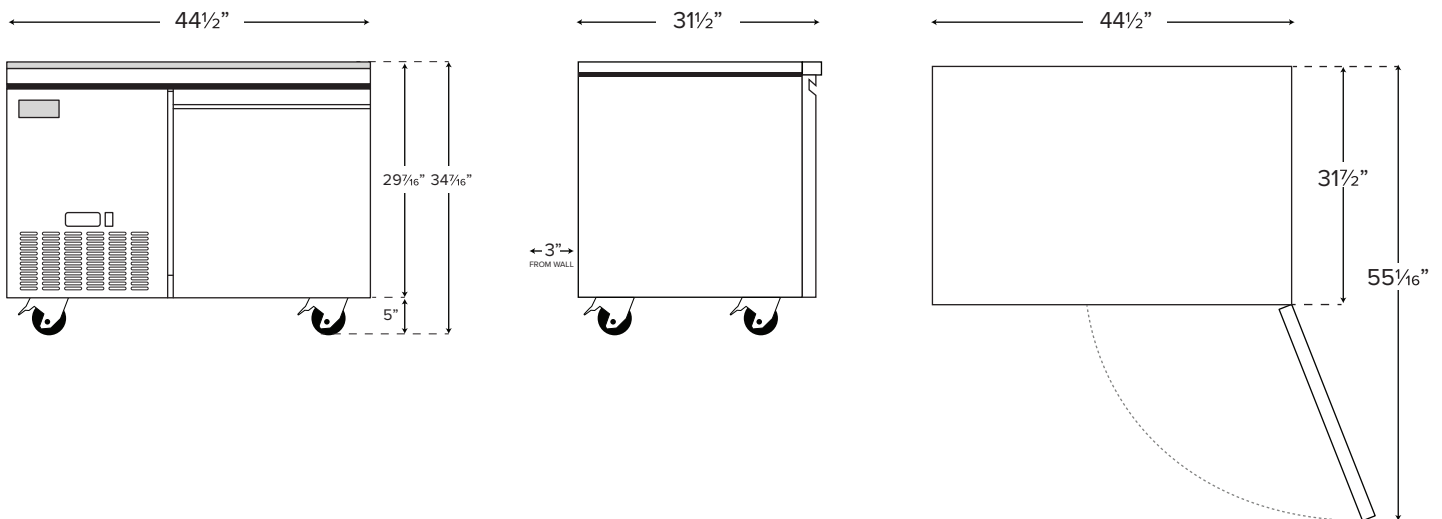

NEMA 5-15P