



SSUD Series Undercounter Refrigerator

MODEL #178SSUD260R

CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance. Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing. Two doors feature easy-to-use recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance and tight kitchen spaces.

SHELVING

2 white epoxy-coated steel shelves included. They accommodate up to 90 lb. each.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion. Interior wall-mounted thermometer for easy temperature monitoring. Preprogrammed digital controller features auto-defrost function. Deeper style cabinet allows for more storage room.

PROJECT: _____

MODEL: _____ SERIAL#: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

SSUD SERIES – UNDERCOUNTER REFRIGERATOR

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperatures from 33°F - 40°F
- Two epoxy-coated steel shelf accommodates up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- Casters for easy mobility
- 115V; 1/5 hp



WARRANTY

RESIDENTIAL: Avantco assumes no liability parts or labor coverage for component failure, factory defect or any other damages for unit installed in non-commercial foodservice or residential applications.



★ Conforms to UL & NSF-7 Standards



TECHNICAL DATA

Dimensions

| | |
|----------------------|-----------------------|
| Exterior Dimensions | 60"W x 31½"D x 34⅞"H |
| Interior Dimensions | 39⅛"W x 26⅜"D x 22⅞"H |
| Depth with Door Open | 55⅞" |
| Net Volume | 464L/ 16.4 CU.FT |
| Net Weight | 220lbs |
| Gross Weight | 265lbs |
| Packaging Dimensions | 62¾"W x 34¼"D x 36¼"H |

Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290/ 90g |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Electronic |
| Horsepower | 1/4 |
| BTU (BTU/hr) | 631 |



Construction

| | |
|---------------------|---------------------------------|
| Exterior Material | Type 430 Stainless Steel |
| Interior Material | Type 304 Stainless Steel |
| Door Type | Solid Hinged |
| Insulation Material | Foamed-in -place polyurethane |
| Shelves | 2 |
| Shelf Size | (1) 23⅝" x 24⅜" (1) 15⅜" x 24⅜" |
| Shelf Material | Epoxy Coated Steel |
| Shelf Load Capacity | 90lbs/pc |

Electrical

| | |
|------------------------|-----------------|
| Voltage | 115 |
| Amps | 5.1 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P (UL) |
| Electrical Cord Length | 8' 2⅞" |

PLAN VIEW

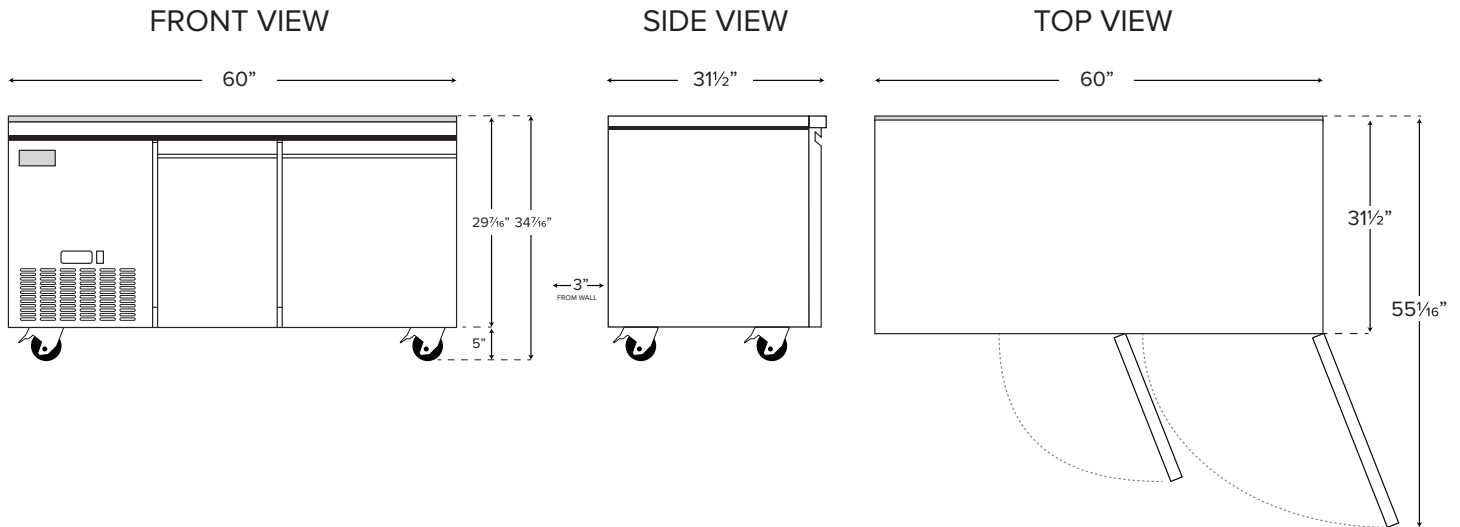

NEMA 5-15P