



SSUD Series Undercounter Refrigerator

MODEL #178SSUD3R

CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance. Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing.

Three doors feature easy-to-use recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance and tight kitchen spaces.

SHELVING

3 white epoxy-coated steel shelves included. They accommodate up to 90 lb. each.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.

Deeper style cabinet allows for more storage room.

PROJECT: _____

MODEL: _____ SERIAL#: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

SSUD SERIES – UNDERCOUNTER REFRIGERATOR

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperatures from 33°F - 40°F
- Three epoxy-coated steel shelf accommodates up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- Casters for easy mobility
- 115V; 1/4 hp



WARRANTY

RESIDENTIAL: Avantco assumes no liability parts or labor coverage for component failure, factory defect or any other damages for unit installed in non-commercial foodservice or residential applications.



★ Conforms to UL & NSF-7 Standards





SSUD Series Undercounter Refrigerator

MODELS #178SSUD3R

TECHNICAL DATA

Dimensions

Exterior Dimensions	93 ¹³ / ₁₆ " W x 31 ¹ / ₂ " D x 34 ⁷ / ₁₆ " H
Interior Dimensions	73 ¹ / ₂ " W x 26 ³ / ₁₆ " D x 22 ⁷ / ₈ " H
Depth with Door Open	55 ¹ / ₁₆ "
Net Volume	719L/25.4CU.FT
Net Weight	342lbs
Gross Weight	386lbs
Packaging Dimensions	96 ⁹ / ₁₆ " W x 34 ¹ / ₄ " D x 36 ¹ / ₄ " H

Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290/ 90g
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Electronic
Horsepower	1/4
BTU (BTU/hr)	809



Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Door Type	Solid Hinged
Insulation Material	Foamed-in -place polyurethane
Shelves	3
Shelf Size	(1) 25 ¹³ / ₆₄ " x 24 ¹³ / ₃₂ " & (2) 23 ⁵ / ₃₂ " x 24 ¹³ / ₃₂ "
Shelf Material	Epoxy Coated Steel
Shelf Load Capacity	90lbs/pc

Electrical

Voltage	115
Amps	5.7
Hz	60
Phase	1
Plug Type	NEMA 5-15P (UL)
Electrical Cord Length	8' 2 ⁷ / ₁₆ "

PLAN VIEW

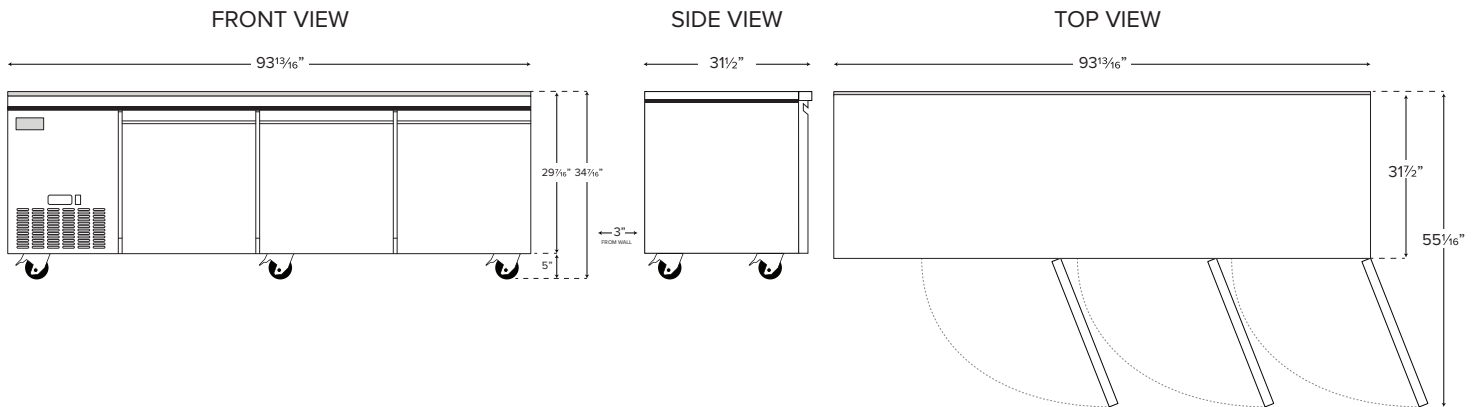

NEMA 5-15P