



# SSWD Series Undercounter Refrigerator

**MODEL #178SSWD260R**

## CABINET CONSTRUCTION

Heavy duty construction includes a 304 type stainless steel interior and a 430 type stainless steel exterior, resulting in strength, durability, and an attractive, sleek appearance. Countertop features built-in 3½" backsplash for wall protection and easy cleaning. Working height of 35¼" sits flush to most counters.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing. Door features easy-to-use recessed handles for quick interior access. Door stays open past 90° for easy loading, but will self-close under 90° to save energy.

## REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance and tight kitchen spaces.

## SHELVING

2 white epoxy-coated steel shelves included. They accommodate up to 90 lb. each

## MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.

Deeper style cabinet allows for more storage room.

PROJECT: \_\_\_\_\_

MODEL: \_\_\_\_\_ SERIAL#: \_\_\_\_\_

ITEM #: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

## SSWD SERIES – UNDERCOUNTER REFRIGERATOR

Increase cold food prep storage in your kitchen

## SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- 3½" single piece backsplash built into top
- Strong and sleek 430 type stainless steel exterior
- 304 type stainless steel interior maintains temperature from 33°F - 40°F
- Two epoxy-coated steel shelves accommodate up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/5 hp



## WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



★ Conforms to UL & NSF-7 Standards



## TECHNICAL DATA

### Dimensions

Exterior Dimensions	67 <sup>15</sup> / <sub>16</sub> " W x 31 <sup>1</sup> / <sub>2</sub> " D x 38" H
Interior Dimensions	47 <sup>5</sup> / <sub>8</sub> " W x 26 <sup>3</sup> / <sub>16</sub> " D x 22 <sup>7</sup> / <sub>8</sub> " H
Depth with Door Open	55 <sup>1</sup> / <sub>16</sub> "
Net Volume	464L / 16.4CU.FT
Net Weight	220lbs
Gross Weight	265lbs
Packaging Dimensions	70 <sup>11</sup> / <sub>16</sub> " W x 34 <sup>1</sup> / <sub>4</sub> " D x 39" H

### Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290/ 90g
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Electronic
Horsepower	1/4
BTU (BTU/hr)	631



### Construction

Exterior Material	Type 430 Stainless Steel
Interior Material	Type 304 Stainless Steel
Door Type	Solid Hinged
Insulation Material	Foamed-in -place polyurethane
Shelves	2
Shelf Size	(1) 23 <sup>1</sup> / <sub>8</sub> " x 24 <sup>3</sup> / <sub>8</sub> " (1) 15 <sup>3</sup> / <sub>16</sub> " x 24 <sup>3</sup> / <sub>8</sub> "
Shelf Material	Plastic Coated Steel
Shelf Load Capacity	90lbs/pc

### Electrical

Voltage	115
Amps	5.1
Hz	60
Phase	1
Plug Type	NEMA 5-15P (UL)
Electrical Cord Length	8' 2 <sup>7</sup> / <sub>16</sub> "

## PLAN VIEW

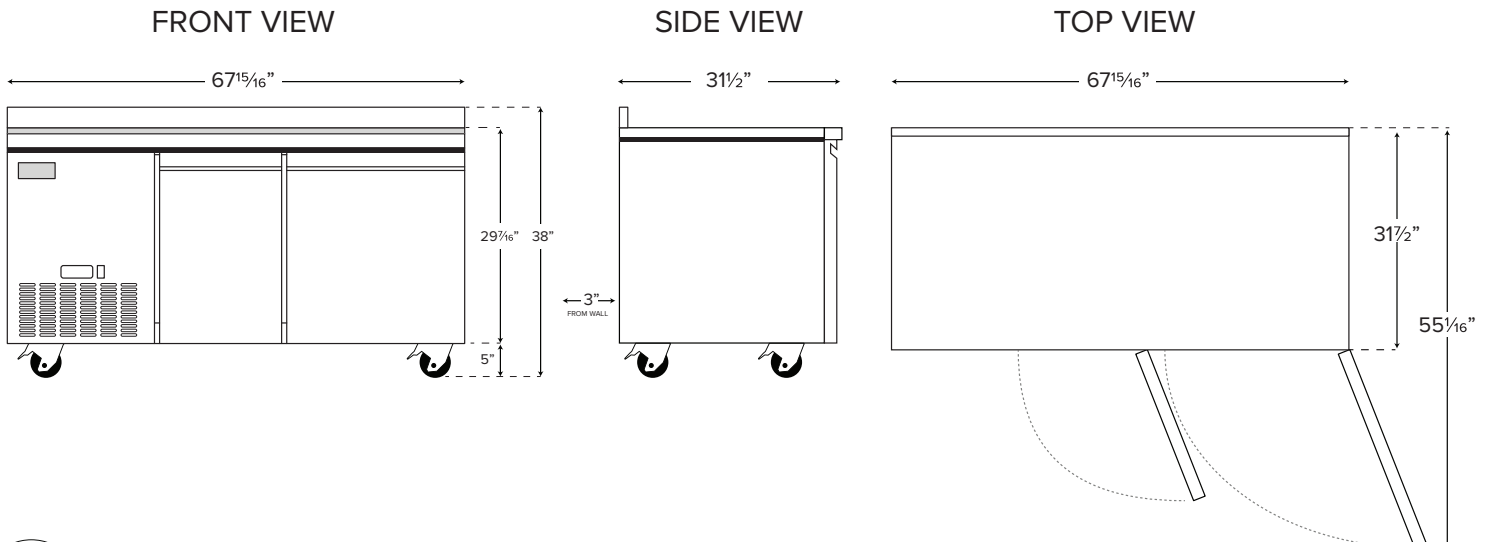

NEMA 5-15P