# UBB Series
## Back Bar Refrigerator

### REFRIGERATION
# AVANTCO

www.AvantcoRefrigeration.com

**MODELS** #178UBB1GHCS

## UBB SERIES - STANDARD DEPTH, GLASS DOOR
Keep quality beverages chilled and ready to serve.

### CABINET CONSTRUCTION
430 type stainless steel exterior with a 201 type stainless steel interior. Self-closing, glass door comes standard with a lock to protect contents inside. Durable, 1½" thick stainless steel top for prep and drink service.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

### REFRIGERATION SYSTEM
Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

### SHELVING
1 epoxy-coated steel shelf included accommodates up to 90 lb.

### MODEL FEATURES
Preprogrammed digital controller features auto-defrost function. Standard depth accommodates one ½ size keg.

## SPECIAL FEATURES
- Eco-friendly R290 hydrocarbon refrigerant
- Sleek, stainless steel exterior with glass door
- Food-rated 304 type stainless steel interior with coved corners
- Digital temperature controls maintain temperatures from 33-40˚F
- Accommodates up to one ½ keg
- 1 epoxy-coated steel shelf accommodates up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Built-in 1½" stainless steel top
- Auto defrost for easy maintenance
- 115V, 1/6 hp

## WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.

**1 year** WARRANTY
Parts & Labor

**5 year** WARRANTY
Compressor

ETL Intertek    c ETL us Intertek

# UBB Series
## Back Bar Refrigerator

*REFRIGERATION*
## AVANTCO

**MODELS** #178UBB1GHCS

## TECHNICAL DATA

### Dimensions

| | |
|---|---|
| Exterior Dimensions | 23½"W x 30¾"D x 39¾"H |
| Interior Dimensions | 29½"W x 18⅛"D x 28⅝"H |
| Net Volume | 7.8 cu. ft. |
| Net Weight | 132 lb. |
| Gross Weight | 176 lb. |
| Packaging Dimensions | 26"W x 32¼"D x 45"H |

### Cooling

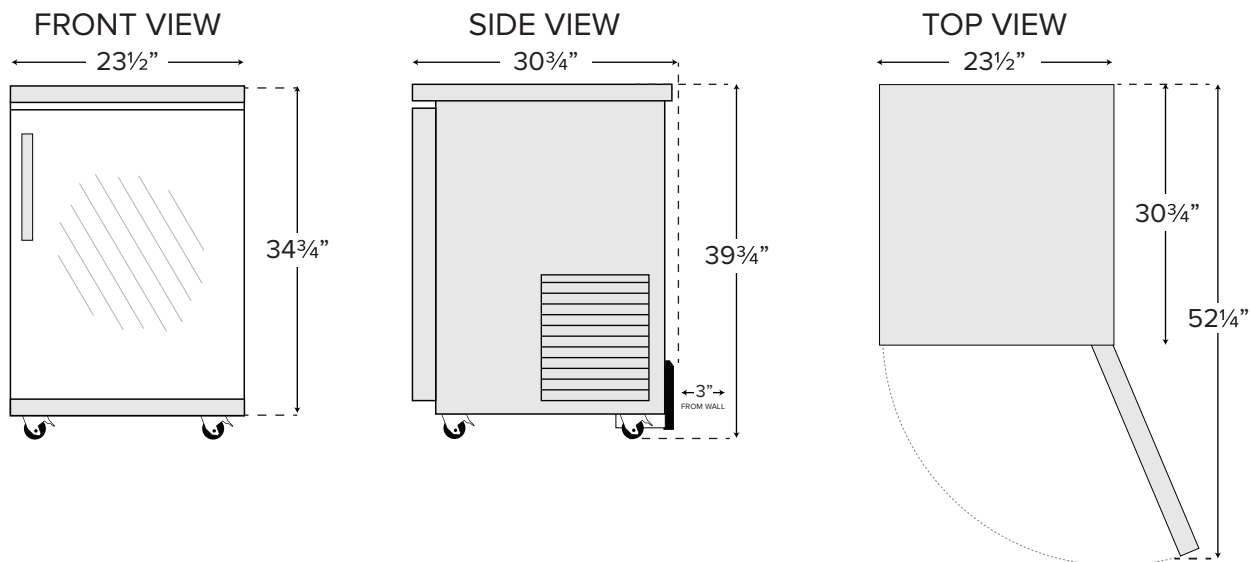| | |
|---|---|
| Temperature Range | 33 - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/6 |

### Construction

| | |
|---|---|
| Exterior Material | Type 430 Stainless Steel |
| Interior Material | Type 201 Stainless Steel |
| Insulation Material | Foamed-In-Place Polyurethane |
| Shelf Size | 18⅞"W x 23⅞"D |
| Shelf Material | Epoxy-Coated Steel |
| Shelf Load Capacity | 90 lb. |

### Electrical

| | |
|---|---|
| Voltage | 115 |
| Amps | 1.92 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 96" |

## PLAN VIEW

### FRONT VIEW
23½"
34¾"

### SIDE VIEW
30¾"
39¾"
3" FROM WALL

### TOP VIEW
23½"
30¾"
52¼"

NEMA 5-15P