



# UBB Series Back Bar Refrigerator

**MODELS #178UBB60SHC**

### CABINET CONSTRUCTION

Sliding glass doors provide high visibility and the convenience of zero required frontal clearance to open.

Heavy-duty black coated steel exterior with a 304 type stainless steel interior features coved corners for easy clean-up.

Durable, 1½" thick stainless steel top for prep and drink service.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

### REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Side-mounted condensing unit positioned for easy maintenance.

### SHELVING

4 epoxy-coated steel shelves included.

Each accommodates up to 90 lb.

### MODEL FEATURES

Narrow depth design makes this unit ideal for tight bar spaces.

Food rated design makes for convenient storage of garnishes for cocktails.

LED lighting ensures optimal product visibility.

Preprogrammed digital controller features auto-defrost function.

PROJECT: \_\_\_\_\_

MODEL: \_\_\_\_\_ SERIAL#: \_\_\_\_\_

ITEM #: \_\_\_\_\_ QUANTITY: \_\_\_\_\_

APPROVAL: \_\_\_\_\_ DATE: \_\_\_\_\_

### UBB SERIES - NARROW DEPTH, SLIDING GLASS DOOR

Keep quality beverages chilled and ready to serve.

### SPECIAL FEATURES

- Sliding door design eliminates need for space to open
- Stainless steel interior is food rated and marked with the ETL Sanitation mark
- LED lighting ensures optimal product visibility
- Eco-friendly R290 hydrocarbon refrigerant
- Sleek, black coated steel exterior with glass doors
- 304 type stainless steel interior with coved corners maintains temperatures from 33-40°F
- Four epoxy-coated steel shelves accommodate up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Built-in 1½" stainless steel top
- 115V; 1/5 hp



### WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



MODELS #178UBB60SHC

## TECHNICAL DATA

### Dimensions

Exterior Dimensions	60 <sup>3</sup> / <sub>4</sub> "W x 24 <sup>7</sup> / <sub>16</sub> "D x 35 <sup>5</sup> / <sub>8</sub> "H
Interior Dimensions	48 <sup>1</sup> / <sub>4</sub> "W x 18 <sup>1</sup> / <sub>2</sub> "D x 30 <sup>1</sup> / <sub>2</sub> "H
Net Volume	17.3 cu. ft.
Net Weight	276 lb.
Gross Weight	319 lb.
Packaging Dimensions	63 <sup>1</sup> / <sub>2</sub> "W x 27 <sup>1</sup> / <sub>2</sub> "D x 41 <sup>3</sup> / <sub>4</sub> "H

### Construction

Exterior Material	Black Coated Steel
Interior Material	Type 304 Stainless Steel
Countertop Type	Type 304 Stainless Steel
Door Type	Glass Sliding
Insulation Material	Foamed-in-place polyurethane
Shelf Size	(4) 23 <sup>5</sup> / <sub>8</sub> " x 18 <sup>1</sup> / <sub>8</sub> "
Shelf Material	Epoxy-coated steel
Shelf Load Capacity	90 lb.

### Cooling


Temperature Range	33 - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5
BTU (BTU/hr)	512

### Electrical


Voltage	115
Amps	2.88
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	106"

## PLAN VIEW



FRONT VIEW

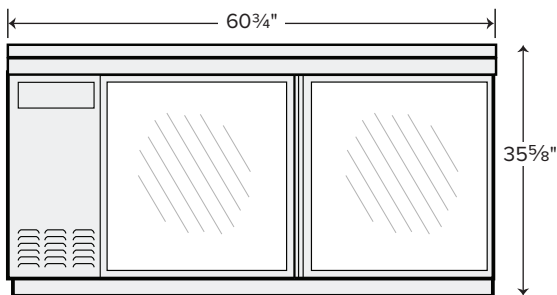

SIDE VIEW



TOP VIEW

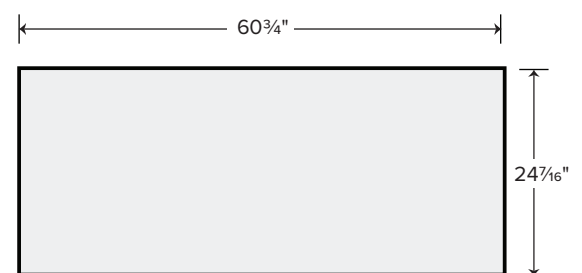

NEMA 5-15P