



www.AvantcoRefrigeration.com

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

UDD Series Beer Dispenser

BASE MODEL #178UDD1HC • OPTIONAL MODELS #178UDD12, #178UDD13, #178UDD14

UDD SERIES - BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 201 stainless steel interior and black coated steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Solid, locking door features stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

Single tap tower with 10¼" faucet height makes filling tall glasses easy.

Includes 1 "D" coupler per tap.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature.

Built-in drip tray with included drain bottle catches drips and sloshes to reduce the amount of clean-up necessary.

SPECIAL FEATURES

- Holds (1) ½ keg
- 1 tap tower with 10¼" faucet height
- ⅓ hp compressor uses eco-friendly R290 hydrocarbon refrigerant
- Self-closing, locking door
- Includes 1 "D" coupler per tap
- Black coated steel exterior and 304 stainless steel interior
- 115V



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor

05/2019



UDD Series Beer Dispenser

BASE MODEL #178UDD1HC

OPTIONAL MODELS #178UDD12, #178UDD13, #178UDD14



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|-----------------------|
| Exterior Dimensions | 23½"W x 30¼"D x 39¾"H |
| Interior Dimensions | 19½"W x 18⅝"D x 28⅝"H |
| Tap Tower Dimensions | 16"H 3"Diameter |
| Faucet Height | 10¼" |
| Product Capacity | (1) ½ Keg |
| Net Volume | 7.8 cu. ft. |
| Net Weight | 132 lb. |
| Gross Weight | 176 lb. |
| Packaging Dimensions | 26"W x 32¼"D x 45"H |

Construction

| | |
|---------------------|------------------------------|
| Exterior Material | Black Coated Steel |
| Interior Material | Type 201 Stainless Steel |
| Insulation Material | Foamed-in-place polyurethane |
| Taps | 1 |





Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/6 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 1.92 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 96" |

PLAN VIEW

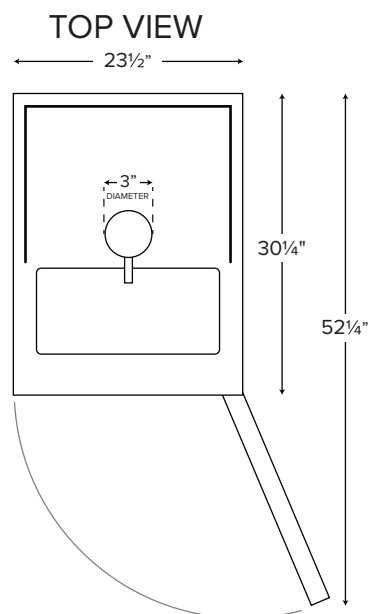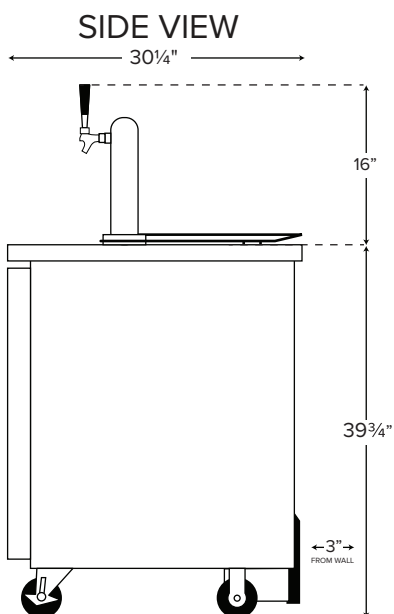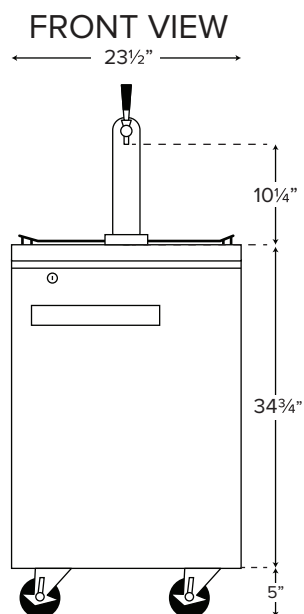

NEMA 5-15P



www.AvantcoRefrigeration.com

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

UDD Series Beer Dispenser

BASE MODEL #178UDD1HCS • OPTIONAL MODELS #178UDD1S2, #178UDD1S3, #178UDD1S4

UDD SERIES - STAINLESS STEEL BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 304 stainless steel interior and 430 stainless steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

Solid, locking door features stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

Single tap tower with 10¼" faucet height makes filling tall glasses easy.

Includes 1 "D" coupler per tap.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature.

Built-in drip tray with included drain bottle catches drips and sloshes to reduce the amount of clean-up necessary.

SPECIAL FEATURES

- Holds (1) ½ keg
- 1 tap tower with 10¼" faucet height
- ½ hp compressor uses eco-friendly R290 hydrocarbon refrigerant
- Self-closing, locking door
- Includes 1 "D" coupler per tap
- Sleek stainless steel finish
- 115V



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor

05/2019



UDD Series Beer Dispenser

BASE MODEL #178UDD1HCS

OPTIONAL MODELS #178UDD1S2, #178UDD1S3, #178UDD1S4



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|-----------------------|
| Exterior Dimensions | 23½"W x 30¼"D x 39¾"H |
| Interior Dimensions | 19½"W x 18⅞"D x 28⅝"H |
| Tap Tower Dimensions | 16"H 3"Diameter |
| Faucet Height | 10¼" |
| Product Capacity | (1) ½ Keg |
| Net Volume | 7.8 cu. ft. |
| Net Weight | 132 lb. |
| Gross Weight | 176 lb. |
| Packaging Dimensions | 26"W x 32¼"D x 45"H |

Construction

| | |
|---------------------|------------------------------|
| Exterior Material | Type 430 Stainless Steel |
| Interior Material | Type 304 Stainless Steel |
| Insulation Material | Foamed-in-place polyurethane |
| Taps | 1 |





Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/6 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 1.92 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 96" |

PLAN VIEW

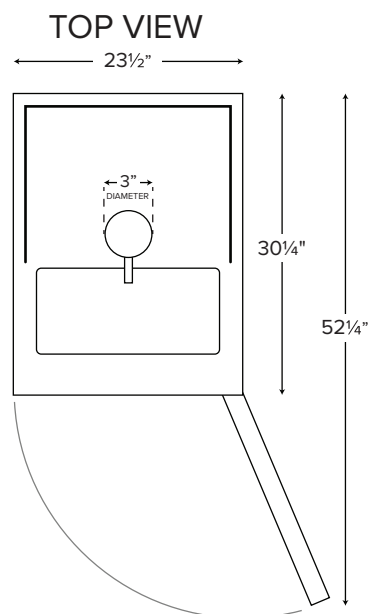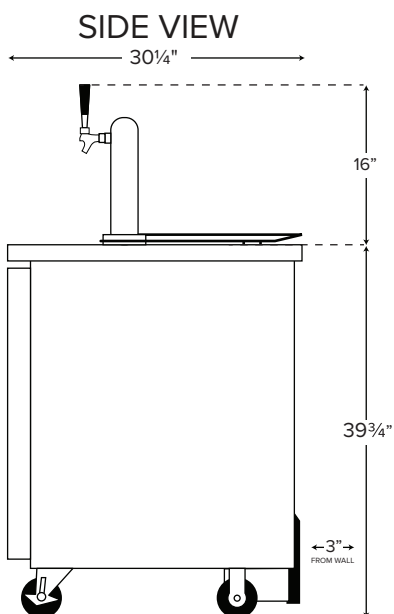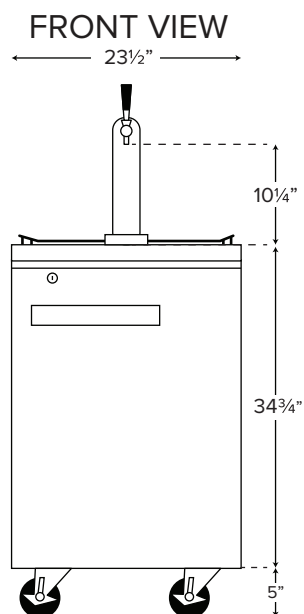

NEMA 5-15P



www.AvantcoRefrigeration.com

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

UDD Series Beer Dispenser

BASE MODEL #178UDD2HC • OPTIONAL MODELS #178UDD23, #178UDD24

UDD SERIES - BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 304 stainless steel interior and black coated steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

2 solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

1 double tap tower with 10¼" faucet height makes filling tall glasses easy.

Includes 2 "D" couplers per tap.

SHELVING

2 shelves included for optional use as a back bar cooler. Each accommodates up to 90 lb. to best suit your needs.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature. Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (2) ½ kegs
- 1 double tap tower with 10¼" faucet height
- ½ hp compressor uses environmentally-friendly R290 refrigerant
- Self-closing, locking doors
- LED lights illuminate interior
- Includes 2 "D" couplers per tap
- Black coated steel exterior and 304 stainless steel interior
- Foamed-in-place polyurethane insulation
- Easy-to-use digital temperature control
- 115V



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor

05/2019
Intertek Intertek



UDD Series Beer Dispenser

BASE MODEL #178UDD2HC

OPTIONAL MODELS #178UDD23, #178UDD24



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|---|
| Exterior Dimensions | 58 $\frac{7}{8}$ "W x 27 $\frac{3}{4}$ "D x 35 $\frac{5}{8}$ "H |
| Interior Dimensions | 46 $\frac{1}{4}$ "W x 21 $\frac{7}{8}$ "D x 30 $\frac{1}{2}$ "H |
| Tap Tower Dimensions | 16"H 3"Diameter |
| Faucet Height | 10 $\frac{1}{4}$ " |
| Product Capacity | (2) $\frac{1}{2}$ Kegs |
| Net Volume | 19.4 cu. ft. |
| Net Weight | 254 lb. |
| Gross Weight | 297 lb. |
| Packaging Dimensions | 61 $\frac{1}{4}$ "W x 30 $\frac{1}{2}$ "D x 41 $\frac{3}{4}$ "H |

Construction

| | |
|---------------------|---|
| Exterior Material | Black Coated Steel |
| Interior Material | Type 304 Stainless Steel |
| Insulation Material | Foamed-In-Place Polyurethane |
| Taps | 2 |
| Shelves | (2) 22 $\frac{1}{2}$ " x 21 $\frac{1}{2}$ " |
| Shelf Material | Epoxy-Coated Steel |
| Shelf Load Capacity | 90 lb. |



Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/5 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 2.88 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 106" |

PLAN VIEW

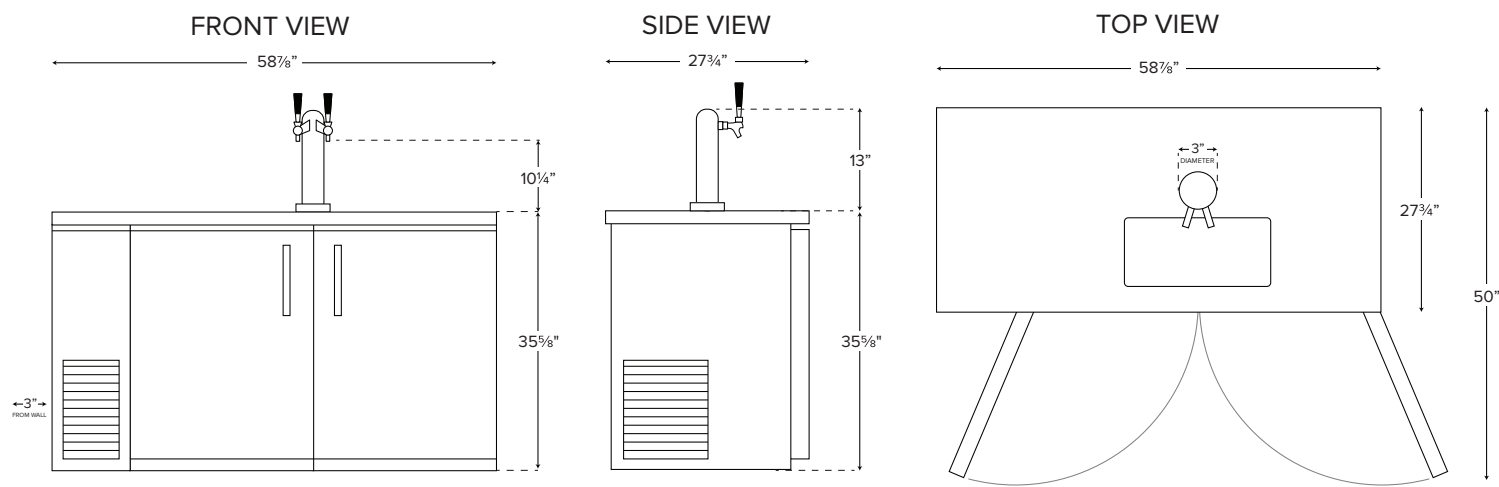

NEMA 5-15P



www.AvantcoRefrigeration.com

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

UDD Series Beer Dispenser

BASE MODEL #178UDD2HCS • OPTIONAL MODELS #178UDD2S3, #178UDD2S4

UDD SERIES - BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 304 stainless steel interior and 430 stainless steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

2 solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

1 double tap tower with 10¼" faucet height makes filling tall glasses easy.

Includes 2 "D" couplers per tap.

SHELVING

2 shelves included for optional use as a back bar cooler. Each accommodates up to 90 lb. to best suit your needs.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature. Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (2) ½ kegs
- 1 double tap tower with 10¼" faucet height
- ½ hp compressor uses environmentally-friendly R290 refrigerant
- Self-closing, locking doors
- LED lights illuminate interior
- Includes 2 "D" couplers per tap
- 430 stainless steel exterior and 304 stainless steel interior
- Foamed-in-place polyurethane insulation
- Easy-to-use digital temperature control



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.




Parts & Labor



Compressor



05/2019



UDD Series Beer Dispenser

BASE MODEL #178UDD2HCS

OPTIONAL MODELS #178UDD2S3, #178UDD2S4



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|---|
| Exterior Dimensions | 58 $\frac{7}{8}$ "W x 27 $\frac{3}{4}$ "D x 35 $\frac{5}{8}$ "H |
| Interior Dimensions | 46 $\frac{1}{4}$ "W x 21 $\frac{7}{8}$ "D x 30 $\frac{1}{2}$ "H |
| Tap Tower Dimensions | 16"H 3"Diameter |
| Faucet Height | 10 $\frac{1}{4}$ " |
| Product Capacity | (2) $\frac{1}{2}$ Kegs |
| Net Volume | 19.4 cu. ft. |
| Net Weight | 258 lb. |
| Gross Weight | 297 lb. |
| Packaging Dimensions | 61 $\frac{1}{4}$ "W x 30 $\frac{1}{2}$ "D x 41 $\frac{3}{4}$ "H |

Construction

| | |
|---------------------|---|
| Exterior Material | Type 430 Stainless Steel |
| Interior Material | Type 304 Stainless Steel |
| Insulation Material | Foamed-In-Place Polyurethane |
| Taps | 2 |
| Shelves | (2) 22 $\frac{1}{2}$ " x 21 $\frac{1}{2}$ " |
| Shelf Material | Epoxy-Coated Steel |
| Shelf Load Capacity | 90 lb. |



Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/5 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 2.88 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 106" |

PLAN VIEW

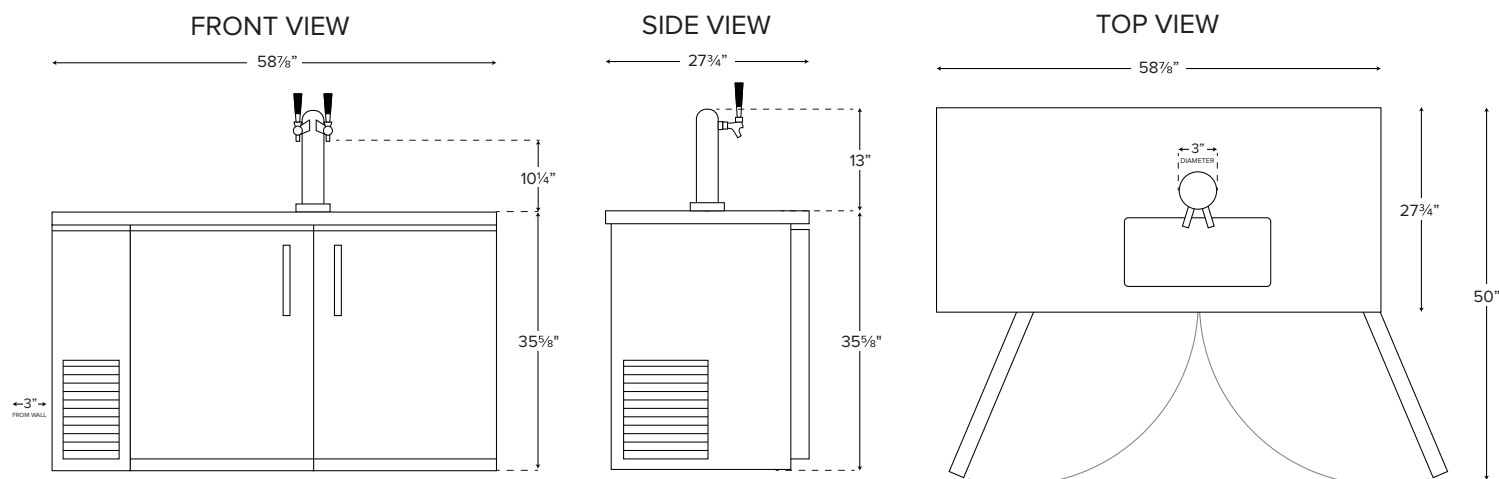

NEMA 5-15P



www.AvantcoRefrigeration.com

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

UDD Series Beer Dispenser

BASE MODEL #178UDD3HC • OPTIONAL MODELS #178UDD36, #178UDD38

UDD SERIES - BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 304 stainless steel interior and black coated steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

2 solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

2 double tap towers with 10¼" faucet height makes filling tall glasses easy.

Includes 2 "D" couplers per tap.

SHELVING

2 shelves included for optional use as a back bar cooler. Each accommodates up to 90 lb. to best suit your needs.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature. Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (3) ½ kegs
- 2 double tap towers with 10¼" faucet height
- ½ hp compressor uses environmentally-friendly R290 refrigerant
- Self-closing, locking doors
- LED lights illuminate interior
- Includes 2 "D" couplers per tap
- Black coated steel exterior and 304 stainless steel interior
- Foamed-in-place polyurethane insulation
- Easy-to-use digital temperature control
- 115V



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



05/2019



UDD Series Beer Dispenser

BASE MODEL #178UDD3HC

OPTIONAL MODELS #178UDD36, #178UDD38



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|-----------------------|
| Exterior Dimensions | 69½"W x 27¾"D x 35⅝"H |
| Interior Dimensions | 56½"W x 21½"D x 30½"H |
| Tap Tower Dimensions | 16"H 3"Diameter |
| Faucet Height | 10¼" |
| Product Capacity | (3) ½ Kegs |
| Net Volume | 23.4 cu. ft. |
| Net Weight | 298 lb. |
| Gross Weight | 341 lb. |
| Packaging Dimensions | 71½"W x 30½"D x 41¾"H |

Construction

| | |
|---------------------|------------------------------|
| Exterior Material | Black Coated Steel |
| Interior Material | Type 304 Stainless Steel |
| Insulation Material | Foamed-In-Place Polyurethane |
| Taps | 4 |
| Shelves | (2) 27¾" x 21½" |
| Shelf Material | Epoxy-Coated Steel |
| Shelf Load Capacity | 90 lb. |



Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/5 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 3.6 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 106" |

PLAN VIEW

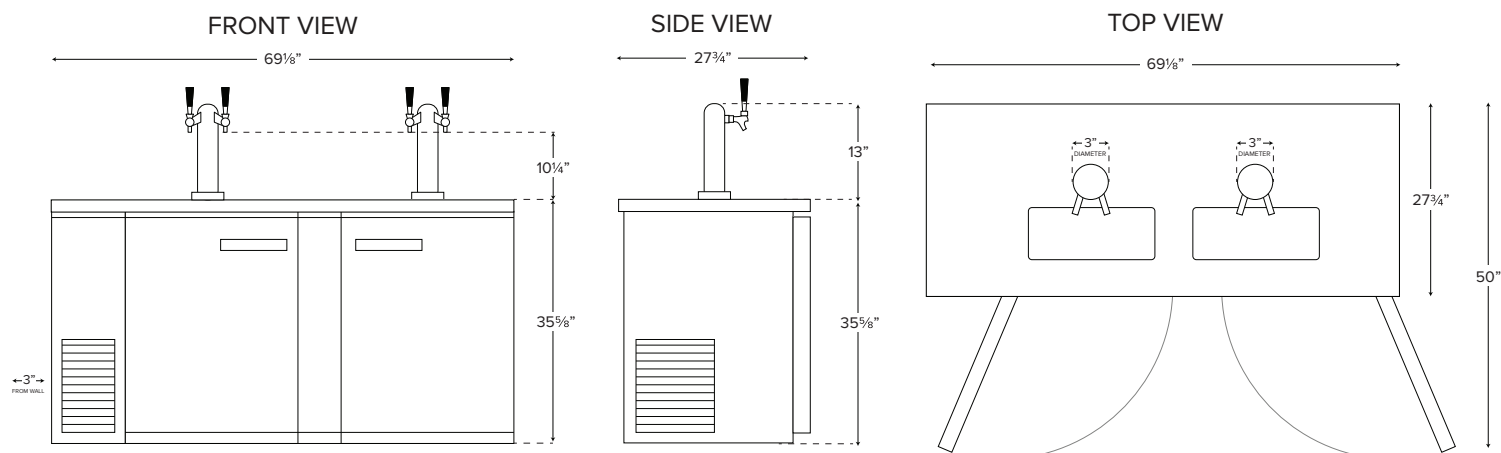

NEMA 5-15P



www.AvantcoRefrigeration.com

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

UDD Series Beer Dispenser

BASE MODEL #178UDD3HCS • OPTIONAL MODELS #178UDD3S6, #178UDD3S8

UDD SERIES - BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 304 stainless steel interior and 430 stainless steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

2 solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

2 double tap towers with 10¼" faucet height makes filling tall glasses easy.

Includes 2 "D" couplers per tap.

SHELVING

2 shelves included for optional use as a back bar cooler. Each accommodates up to 90 lb. to best suit your needs.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature. Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (3) ½ kegs
- 2 double tap towers with 10¼" faucet height
- ½ hp compressor uses environmentally-friendly R290 refrigerant
- Self-closing, locking doors
- LED lights illuminate interior
- Includes 2 "D" couplers per tap
- 430 stainless steel exterior and 304 stainless steel interior
- Foamed-in-place polyurethane insulation
- Easy-to-use digital temperature control
- 115V



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



05/2019



UDD Series Beer Dispenser

BASE MODEL #178UDD3HCS

OPTIONAL MODELS #178UDD3S6, #178UDD3S8



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|-----------------------|
| Exterior Dimensions | 69½"W x 27¾"D x 35½"H |
| Interior Dimensions | 56½"W x 21⅞"D x 30½"H |
| Tap Tower Dimensions | 16"H 3"Diameter |
| Faucet Height | 10¼" |
| Product Capacity | (3) ½ Kegs |
| Net Volume | 23.4 cu. ft. |
| Net Weight | 302 lb. |
| Gross Weight | 341 lb. |
| Packaging Dimensions | 71½"W x 30½"D x 41¾"H |

Construction

| | |
|---------------------|------------------------------|
| Exterior Material | Type 430 Stainless Steel |
| Interior Material | Type 304 Stainless Steel |
| Insulation Material | Foamed-In-Place Polyurethane |
| Taps | 2 |
| Shelves | (2) 27¾" x 21½" |
| Shelf Material | Epoxy-Coated Steel |
| Shelf Load Capacity | 90 lb. |



Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/5 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 3.6 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 106" |

PLAN VIEW

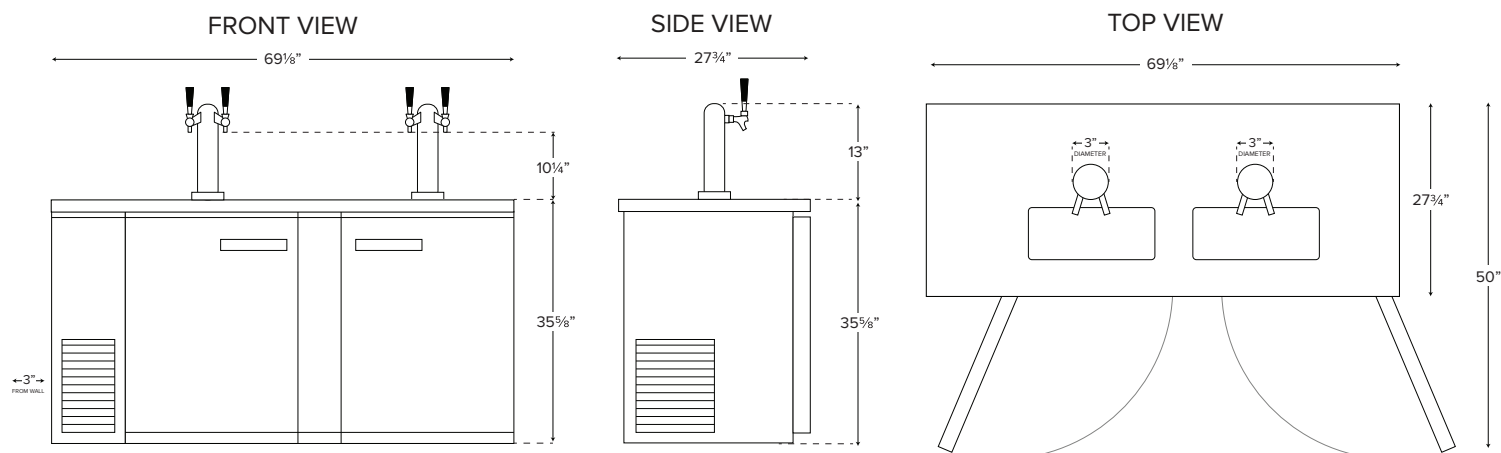

NEMA 5-15P



www.AvantcoRefrigeration.com

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

UDD Series Beer Dispenser

BASE MODEL #178UDD4HC • OPTIONAL MODELS #178UDD46, #178UDD48

UDD SERIES - BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 304 stainless steel interior and black coated steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

3 solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

2 double tap towers with 10¼" faucet height makes filling tall glasses easy.

Includes 2 "D" couplers per tap.

SHELVING

4 shelves included for optional use as a back bar cooler. Each accommodates up to 90 lb. to best suit your needs.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature. Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (4) ½ kegs
- 2 double tap towers with 10¼" faucet height
- ¼ hp compressor uses environmentally-friendly R290 refrigerant
- Self-closing, locking doors
- LED lights illuminate interior
- Includes 2 "D" couplers per tap
- Black coated steel exterior and 304 stainless steel interior
- Foamed-in-place polyurethane insulation
- Easy-to-use digital temperature control
- 115V



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



05/2019



UDD Series Beer Dispenser

BASE MODEL #178UDD4HC

OPTIONAL MODELS 178UDD46, #178UDD48



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|---|
| Exterior Dimensions | 90 ³ / ₈ "W x 27 ³ / ₄ "D x 35 ⁵ / ₈ "H |
| Interior Dimensions | 77 ³ / ₄ "W x 21 ⁷ / ₈ "D x 30 ¹ / ₂ "H |
| Tap Tower Dimensions | 16"H 3"Diameter |
| Faucet Height | 10 ¹ / ₄ " |
| Product Capacity | (4) ½ Kegs |
| Net Volume | 32.4 cu. ft. |
| Net Weight | 364 lb. |
| Gross Weight | 407 lb. |
| Packaging Dimensions | 91 ³ / ₄ "W x 30 ¹ / ₂ "D x 41 ³ / ₄ "H |

Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/4 |



Construction

| | |
|---------------------|---|
| Exterior Material | Black Coated Steel |
| Interior Material | Type 304 Stainless Steel |
| Insulation Material | Foamed-In-Place Polyurethane |
| Taps | 4 |
| Shelves | (2) 22 ¹ / ₂ " x 21 ¹ / ₂ " + (2) 24 ³ / ₄ " x 21 ¹ / ₂ " |
| Shelf Material | Epoxy-Coated Steel |
| Shelf Load Capacity | 90 lb. |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 4.7 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 106" |

PLAN VIEW

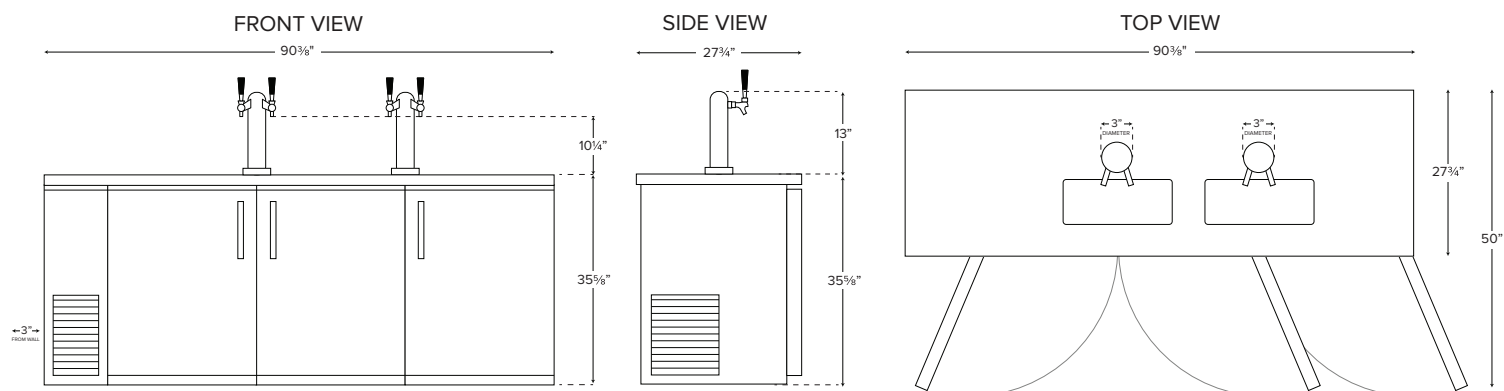

NEMA 5-15P



www.AvantcoRefrigeration.com

PROJECT: _____

MODEL: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

UDD Series Beer Dispenser

BASE MODEL #178UDD4HCS • OPTIONAL MODELS #178UDD4S6, #178UDD4S8

UDD SERIES - BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 304 stainless steel interior and 430 stainless steel exterior.

Durable 1½" thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

3 solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

2 double tap towers with 10¼" faucet height makes filling tall glasses easy.

Includes 2 "D" couplers per tap.

SHELVING

4 shelves included for optional use as a back bar cooler. Each accommodates up to 90 lb. to best suit your needs.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature. Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

SPECIAL FEATURES

- Holds (4) ½ kegs
- 2 double tap towers with 10¼" faucet height
- ¼ hp compressor uses environmentally-friendly R290 refrigerant
- Self-closing, locking doors
- LED lights illuminate interior
- Includes 2 "D" couplers per tap
- 430 stainless steel exterior and 304 stainless steel interior
- Foamed-in-place polyurethane insulation
- Easy-to-use digital temperature control
- 115V



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



05/2019



UDD Series Beer Dispenser

BASE MODEL #178UDD4HCS

OPTIONAL MODELS #178UDD4S6, #178UDD4S8



www.AvantcoRefrigeration.com

TECHNICAL DATA

Dimensions

| | |
|----------------------|---|
| Exterior Dimensions | 90 ³ / ₈ "W x 27 ³ / ₄ "D x 35 ⁵ / ₈ "H |
| Interior Dimensions | 77 ³ / ₄ "W x 21 ⁷ / ₈ "D x 30 ¹ / ₂ "H |
| Tap Tower Dimensions | 16"H 3"Diameter |
| Faucet Height | 10 ¹ / ₄ " |
| Product Capacity | (4) ½ Kegs |
| Net Volume | 32.4 cu. ft. |
| Net Weight | 370 lb. |
| Gross Weight | 407 lb. |
| Packaging Dimensions | 91 ³ / ₄ "W x 30 ¹ / ₂ "D x 41 ³ / ₄ "H |

Construction

| | |
|---------------------|---|
| Exterior Material | Type 430 Stainless Steel |
| Interior Material | Type 304 Stainless Steel |
| Insulation Material | Foamed-In-Place Polyurethane |
| Taps | 4 |
| Shelves | (2) 22 ¹ / ₂ " x 21 ¹ / ₂ " + (2) 24 ³ / ₄ " x 21 ¹ / ₂ " |
| Shelf Material | Epoxy-Coated Steel |
| Shelf Load Capacity | 90 lb. |



Cooling

| | |
|--------------------------|-------------|
| Temperature Range | 33°F - 40°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 90°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 1/4 |

Electrical

| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 4.7 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 106" |

PLAN VIEW

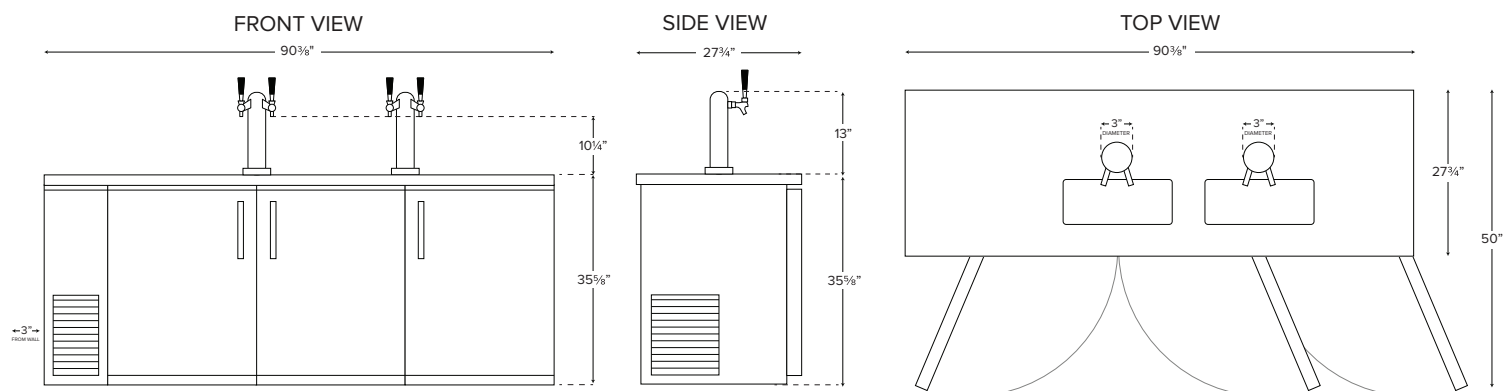

NEMA 5-15P