

PROJECT:	
MODEL:	
ITEM #:	QUANTITY:
APPROVAL:	_ DATE:

UDD Series Beer Dispenser

BASE MODEL #178UDD3HC · OPTIONAL MODELS #178UDD36, #178UDD38

UDD SERIES - BEER DISPENSER

For convenient dispensing of cold ales and lagers.

CABINET CONSTRUCTION

Heavy duty construction includes corrosion-resistant 201 stainless steel interior and black coated steel exterior.

Durable $1\!\!\!/ _2$ ' thick stainless steel top surface is easy to clean after dispensing.

Foamed-in-place polyurethane insulation enhances the structural integrity of the cabinet and helps increase energy efficiency.

2 solid, locking doors feature stay-open feature beyond 90° for easy keg loading, but will self-close under 90° to save energy.

DISPENSING SYSTEM

2 double tap towers with 101/4" faucet height makes filling tall glasses easy.

Includes 4 "D" couplers per tap.

SHELVING

4 shelves included for optional use as a back bar cooler. Each accommodates up to 90 lb. to best suit your needs.

REFRIGERATION SYSTEM

Environmentally-safe R290 refrigerant. Bottom-mounted condensing unit positioned for easy maintenance.

MODEL FEATURES

Preprogrammed digital controls with auto defrost feature. Built-in drip tray with front-facing drain catches drips and sloshes to reduce the amount of clean-up necessary. Drain includes ½" diameter barb for easy installation.

WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



SPECIAL FEATURES

- Holds (3) 1/2 kegs
- 2 double tap towers with 10¹/₄" faucet height
- 1/5 hp compressor uses environmentally-friendly R290 refrigerant
- Self-closing, locking doors
- LED lights illuminate interior
- Includes 4 "D" couplers per tap
- Black coated steel exterior and 201 stainless steel interior
- Foamed-in-place polyurethane insulation
- Easy-to-use digital temperature control
- 115V





05/2019 Intertel







UDD Series Beer Dispenser

BASE MODEL #178UDD3HC OPTIONAL MODELS #178UDD36, #178UDD38

TECHNICAL DATA

Dimensions

Construction

Exterior Material

Interior Material

Taps

Shelves

Shelf Material

Shelf Load Capacity

Insulation Material

69½"W x 27¾"D x 36¼"H
56½"W x 22½"D x 30½"H
16"H 3"Diameter
101⁄4"
(3) ½ Kegs
23.4 cu. ft.
298 lb.
341 lb.
71½"W x 30½"D x 41¾"H

REFRIGERATION VANTCO www.AvantcoRefrigeration.com


Cooling

Temperature Range	33°F - 40°F
Refrigerant	R290
Max. Ambient Temperature	90°F
Defrosting	Automatic
Temperature Controller	Digital
Horsepower	1/5

Electrical

Voltage	115
Amps	3.6
Hz	60
Phase	1
Plug Type	NEMA 5-15P
Electrical Cord Length	106"

PLAN VIEW

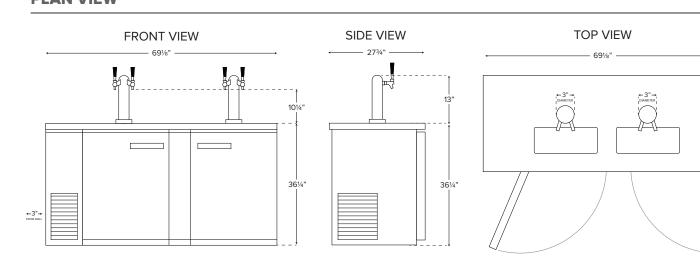

Black Coated Steel

Type 201 Stainless Steel

Foamed-In-Place Polyurethane

4

(4) 27³/₄" x 21¹/₂"

Epoxy-Coated Steel

90 lb.



27¾"

50"