A A G E	BEVERAGE-AIR
---------	--------------

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

WTRCS72D-1 COOKSTAND REFRIGERATOR

WTRCS72D-1 Worktop Refrigerator with 4 Drawers

MODEL: WTRCS72D-1

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel front, sides, drawer(s), and grille (galvanized back & bottom)
- Full electronic control
- Drawers provide ample food product storage
- Full marine drip-guard to prevent spills from dripping over the edge
- Interior liner is made of corrosion resistant aluminum
- Dynamic load rating of 275 lbs per drawer
- 12 gauge drawer slides with 3 Delrin encased stainless steel roller bearings per each drawer slides - LIFETIME WARRANTY ON ALL DRAWERS AND SLIDES
- Heavy duty, fire-proof, reinforced insulated 16 gauge top
- Accommodates 6" deep pans in top & bottom drawers
- Self-closing feature engages in the last 1-2" of travel
- 6" Casters, 3 with brakes standard

WTRCS72D-1

OPTIONS & ACCESSORIES

- ☐ 6" Legs
- 3" Casters
- Gasket guards
- Remote option
- Worktop sizes options
- ☐ Flat top option

REFRIGERATION SYSTEM

- Refrigeration system uses R134a refrigerant to comply with all environmental concerns
- Automatic, non-electric evaporator
- Epoxy coated evaporator coil





















MODEL	WTRCS72D-1
EXTERNAL DIMENSIONAL DATA	
Width Overall (Cabinet)	72"
Depth Overall with Handle & Bumper	34 3/4"
Height Overall with 6" Casters	26 5/8"
Number of Drawers	4
Depth with Drawer Extended	57 3/4"
Drawer Opening (in)	Upper 27 3/8" x 6 1/2" (R) Lower 27 3/8" x 6 1/2" (L)
INTERNAL DIMENSIONAL DATA	
Internal Width Overall (in)	58"
Internal Depth Overall (in)	26"
Internal Height Overall (in)	16"
ELECTRICAL DATA	
Full Load Amperes 115/60/1	4.5A
REFRIGERATION DATA	
Horsepower	1/3
Capacity (BTU/Hr)*	1690
WEIGHT DATA	
Gross Weight (Crated lbs)	580 lbs
Height - Crated	26"
Width - Crated	75 1/2"
Depth - Crated	38"

Drawers



Worktop Refrigerator- With 4 Drawers Models: WTRCS72D-1

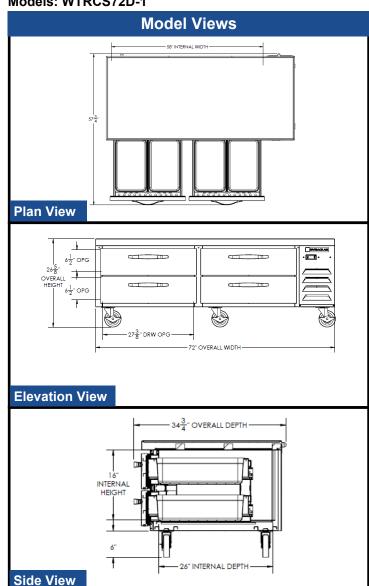

ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set. 115/60/1 NEMA-5-15P

















