

# BLODGETT®

## XR8-E

Electric Mini Rotating Rack Bakery Oven



XR8-E with 12 pan stand

Project \_\_\_\_\_  
Item No. \_\_\_\_\_  
Quantity \_\_\_\_\_

Refer to operator manual specification chart for listed model names.

### EXTERIOR CONSTRUCTION

- Fully welded angle iron frame
- Double pane tempered glass doors
- Semi-rigid mineral fiber insulation at top, back, sides and bottom
- Removable independent door design
- Control panel rotates out for easy access

### INTERIOR CONSTRUCTION

- 304 stainless steel interior
- Rotating rack can be removed without tools
- Six fixed rack positions
- Four side mounted halogen lights for superior illumination

### OPERATION

- Internal steamer system
- Separate bake and steam times
- Cool-down mode
- Blower delay
- Two speed, 3/4 horsepower, convection motor with automatic thermal overload protection

### STANDARD FEATURES

- 12 pan stand with adjustable spacing, removeable crumb trays and low profile casters
- Holds 6 pans (18" x 26")
- USB port for program uploads
- VFD control can hold multi-stage programming for up to 99 products
- Pre-plumbed water lines
- 120V grounded power cords
- 250V, 3 phase, 4-wire or 480V, 3 phase, 4-wire cord set
- Two year parts labor oven warranty

NOTE: The company reserves the right to make substitutions of components without prior notice

XR8-E ROTATING RACK OVEN







## XR8-E ROTATING RACK OVEN

APPROVAL/STAMP

DIMENSIONS ARE IN INCHES (MM)

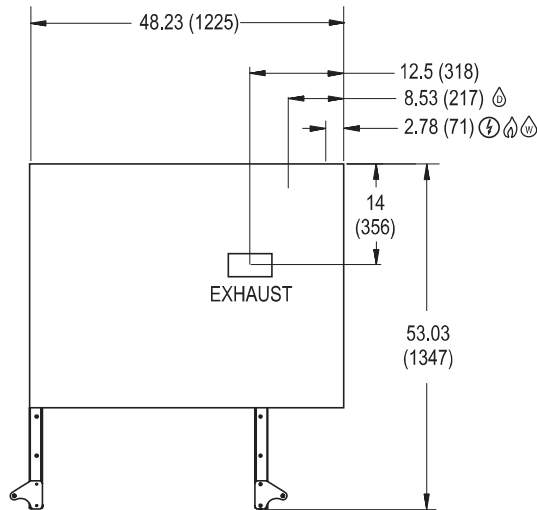

TOP VIEW

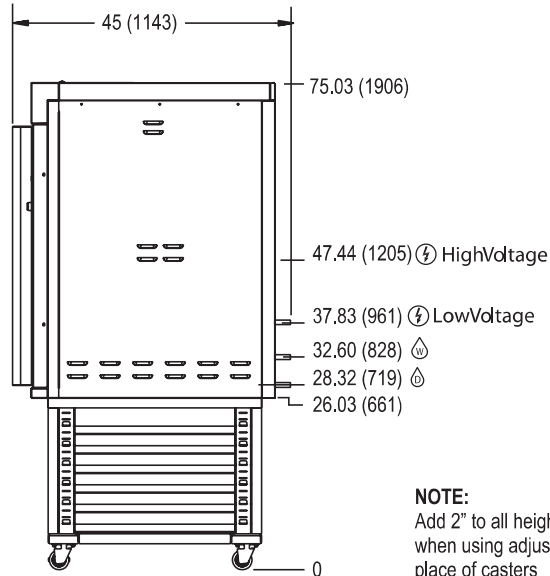

SIDE VIEW

**NOTE:**

Add 2" to all height dimensions when using adjustable legs in place of casters

**SHORT FORM SPECIFICATIONS** Provide Blodgett electric mini rotating rack bakery oven model XR8-E. Unit shall have a single compartment with fully welded angle iron frame, and 304 stainless steel interior. Unit shall accept six 18" x 26" standard full-size bake pans. Rotating rack shall be removable without tools. Unit shall have stainless steel front, top and sides. Doors shall be stainless steel, independent design with dual pane thermal glass windows. Unit shall have internal steamer system with pre-plumbed water lines. Unit shall be fitted with four side mounted, halogen lamps. VFD control can hold multi-stage programming for up to 99 products, separate bake and steam times, cool-down mode, and blower delay. Manual cut-off switch on front panel. Two year oven parts labor warranty. Provide options and accessories as indicated.

### DIMENSIONS

**Floor space** 48.23" (1225 mm) W x 40.27" (1023 mm) D  
**Interior** 32" (813 mm) W x 32" (813 mm) D

### PRODUCT CLEARANCE

**From combustible and non-combustible construction**

0" (0 mm)

12" from back, sides and top recommended for service

### MINIMUM ENTRY CLEARANCE

**Uncrated** 45" (1143 mm)  
**Crated** 49.25" (1251mm)

Unit measures 34" (864) deep with the doors, control panel, and back panel removed.

### SHIPPING INFORMATION

**Approx. Weight**

XR8-E 950 lbs. (431 kg)  
Stand 175 lbs. (79 kg)

**Crate Sizes**

XR8-E 49.25" (1251mm) x 54.25" (1378mm)  
Stand 54" (1371mm) x 34" (864mm) x 28" (711mm)

### MAXIMUM INPUT

15 kW

### POWER SUPPLY

120VAC, 60 Hz, 1 phase, 15 amp maximum dedicated circuit and one of the following:

VAC	Hz	Phase	kW	Amps	Cord Set
				(L1-L2-L3)	
208	60	3	15	44/44/44	15-60P / 4 AWG
240	60	3	15	38/38/38	15-60P / 4 AWG
480	60	3	15	19/19/19	L16-30P / 8 AWG

**For Canada:** XR8E oven must be permanently-connected.

### COLD WATER SUPPLY

**Pipe Size** 3/4" GHT  
**Pressure** 40-75 psi. (276-517 kPa)  
**Flow Rate** 47 GPH (178 LPH)

Appliance is to be installed with backflow protection in accordance with Federal, State or Local codes.

### DRAIN

**XR8-E** 3/4" NPT rear drain connection