

MODEL 2127 MATERIAL HANDLING DOLLIES

When you need to move just about anything with posts or even without posts these dollies are real *people* savers! They are compact triangular shaped dollies with a cup center; often called cup dollies or cup casters. One dolly is placed under each post or leg of the article you intend to move; once all posts have dollies you simply roll your article through doorways, onto elevators, down the street, into the truck, or across the room! The swivel wheels and tripod wheel arrangement allow the article to be moved in any direction; even top heavy articles go where you want them too safely and securely.

MODEL 2127 MEDIUM DUTY STEEL CUP DOLLY


CONSTRUCTION

BODY: Cast semi-steel with 2" deep well, measuring 5" at the top and 3-3/16" at the bottom. Clearance is 5/8" from the floor.

WHEELS: Must be specified. 2" diameter wheels are chosen based on the weight carried and the environmental needs.

WEIGHT: 8-1/2 lbs.

WHEEL MATERIAL CHOICES:	Capacity (lbs.) per dolly
Hard tread, black solid rubber	375
Soft tread, black solid rubber	225
Semi-steel	450
Bondrelene - black plastic	270
TuffBond - white plastic	450

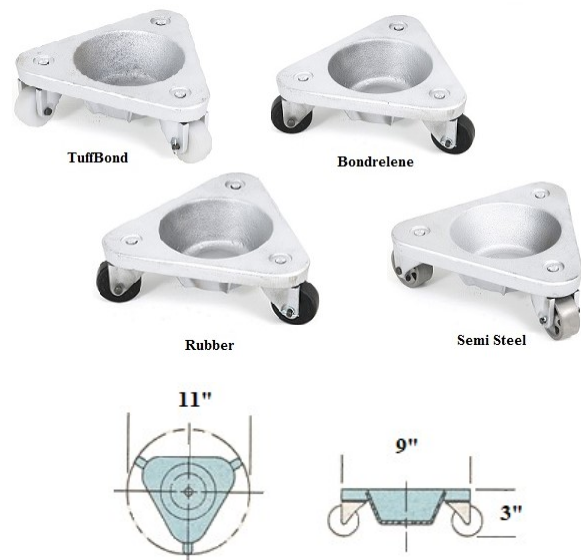

WHEEL CHOICES

- SEMI-STEEL:** Chosen when weight bearing and ease of rolling are the primary considerations and floor protection is secondary. Excellent in high heat applications. Made from compressed sintered iron with impregnated oil.
- RUBBER:** High grade hard and soft rubber tread wheels are used for providing maximum floor protection. Hard tread is used when a higher weight capacity is required. Made from natural rubber on rubber center: soft is 75A; hard is 95A with self-lubricating bushed bore.
- BONDRELENE:** Hard, black plastic wheels are easy to start and roll. They are also impervious to grease, oil, gasoline, cooking fats and most acids.
- TUFFBOND:** Hard white plastic wheels with a high weight capacity, wide temperature range, non-marking, non-shedding, anti-static, non-absorbent, impervious to most chemicals. Made from Ultra High Molecular Weight polyethylene with self-lubricating bushed bore.

MODEL 2127 AL ALUMINUM BASE, WIDE WHEEL CUP DOLLY

CONSTRUCTION


WEIGHT: 4-3/4 lbs.

BODY: Cast aluminum with 2" deep well, measuring 5" at the top and 3-3/16" at the bottom. Clearance is 1-9/16" from the floor.

Only one type wheel is available:

2" diameter X 1-11/16" face hard black plastic wheels.

WEIGHT CAPACITY: 600 lbs.

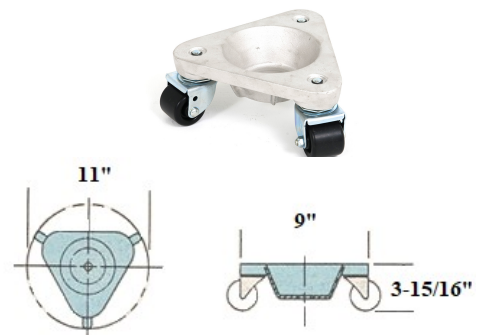

DOLLY TESTIMONIALS



- Commercial kitchen installer: "I bought my first set 15 years ago at an auction. I do not know how old they are but I am still using them today. I just need a couple wheels and I will be back in business."
- Manufacturing company: "I saw the division across town using them to move equipment around the plant and I have to have a set! One man moved an entire production line with four dollies and a lift."
- Moving company: "We use the Bond dolly to relocate companies to new facilities; they are the handiest tool we own."
- Packaging machine manufacturer: "We have been building machinery right on six dollies; they move our product through production, onto the truck, and into our customer site!"



**INTEGRITY, LASTING QUALITY,
TIME AND TIME AGAIN.**