



## ProServe Stainless Steel Meal Delivery Carts

### Short Profile, Double Door, 20 Tray Capacity

Models

MDS1418S20

MDS1418S2R

Project \_\_\_\_\_

Item No. \_\_\_\_\_

Model No. \_\_\_\_\_

Quantity \_\_\_\_\_

#### Features & Benefits

- Single stack rail system handles two (2) trays per rail, ten (10) trays per compartment with (2) compartments and with fixed and welded stainless steel tray slides with a 5.3" (13,5 cm) clearance between rails.
- Serving capacity per cart: 20 each 14" x 18" (35,5 x 46 cm) trays.
- Durable carts designed to specifically meet the meal delivery needs of hospitals (acute care), long term care and correctional facilities.
- Designed to work with unitized pellet system, heat on demand base system or insulated trays.
- Durable type 304 and 430 stainless steel construction ensures long term durability and reliability.
- Insulated base and doors dampen sound and reduce noise.
- Four each 6" (15,24 cm) non-marking nylon casters, two (2) swivel with brake and two (2) fixed, enhance maneuverability and increase safety; optional heavy duty two (2) swivel or (4) four swivel.
- A recessed top controls spills and assists in staging or preparing products.
- An ergonomic handle design on the back of the cart to enhance maneuverability.
- Safe to power wash to ensure sanitization.
- Doors open a full 270° and feature magnetic door catches for closed and fully open positioning.
- Three hinges per side to ensure the longevity of the doors.
- Transit latch for securing the door is easy to open, rust free and can be removed and easily cleaned.
- Non-electrical.
- No assembly is required.



MDS1418S20

#### Approvals



www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056-U.S.A.

Telephone 714 848 1555

Toll Free 800 854 7631

Customer Service 800 833 3003

© Copyright Cambro Manufacturing Company. Printed in the U.S.A. 04/25

# ProServe Stainless Steel Meal Delivery Carts

## Short Profile, Double Door, 20 Tray Capacity


Models MDS1418S20, MDS1418S2R

Project \_\_\_\_\_


Item No. \_\_\_\_\_

Model No. \_\_\_\_\_


Quantity \_\_\_\_\_

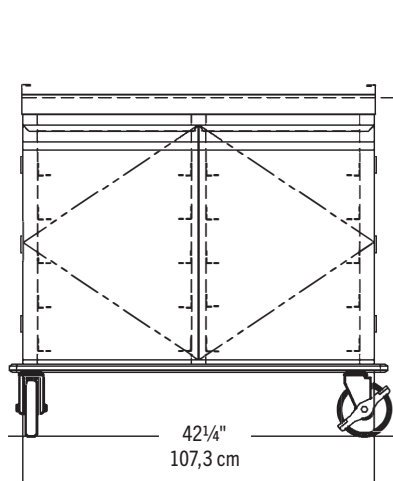

Front View

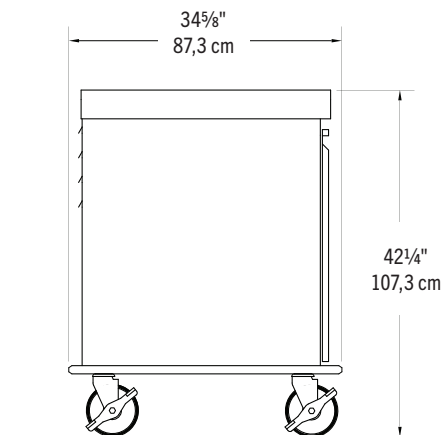

Side View

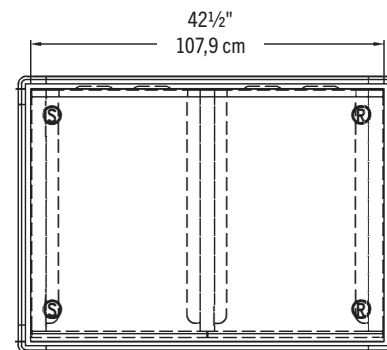

Top View

### Specifications

Dimension Tolerance:  $\pm \frac{1}{4}$ " (0,64 cm)

CODE	TRAY CAPACITY PER COMPARTMENT	EXTERIOR DIMENSIONS W x D x H	INTERNAL DIMENSIONS W x D x H	CASE LB. (CUBE) CASE KG. (M <sup>3</sup> )
MDS1418S20	10 each Tray Size: 14" x 18" (35,5 x 46 cm)	44 1/2" x 34 5/8" x 42 1/4" (113 x 87,3 x 107,3 cm)	15 1/2" x 29" x 28" (52,7 x 78,7 x 71,1 cm)	406 lbs. (53.53) 184,55 kg (1,52)
MDS1418S2R	10 each Tray Size: 14" x 18" (35,5 x 46 cm)	44 1/2" x 34 5/8" x 45 3/4" (113 x 87,3 x 116,2 cm)	15 1/2" x 29" x 28" (52,7 x 78,7 x 71,1 cm)	406 lbs (57.28) 187,27 kg (1,62)

### Architect Specs

The non-electrical Meal Delivery Cart shall be a vertical access, door Meal Delivery Cart, Model, manufactured by Cambro Mfg. Co., Huntington Beach, CA 92647, U.S.A. It shall be made of type 304 and 430 stainless steel. It shall have an ergonomic handle. It shall have two doors that open a full 270° and can be securely positioned open with a magnetic catch. It shall have a fixed and welded stainless steel tray slide system that accommodates 2 trays per rail set, 10 trays per compartment with a clearance of 5.3" (13,5 cm) between rails. It shall have 4 each 6" (15,24 cm) non-marking nylon casters, 2 fixed and 2 swivel with brake. It shall require no assembly.

### Standard Colors

☐ Stainless Steel (000)

### Approvals