BUNN[®]

iMIX® Silver Series® Hot Beverage System with 5 Hoppers

ITEM#	
PROJECT	

DATE



iMIX-5S Dimensions: 32.8"H x 19.3" W x 24" D (83.2cm H x 59.5cm W x 61cm D)



Top hinged door inside view.



iMIX-5S+ Dimensions: 32.8"H x 19.3" W x 24" D (83.2cm H x 59.5cm W x 61cm D)

Features

iMIX Silver Series Hot Beverage System

- Capacity: five, 8-pound (3.6 kg) hoppers.
- · Large, lighted front graphics for merchandising.
- 7-gallon (26.5L) hot water tank to meet peak serving times.
- Cup clearance at 7.25" (18.4 cm) to accommodate popular cup sizes [adjustable to 8.12" (20.6 cm)].
- Variable speed motors allow control of product consistency in mixing chamber (.75 to 6.6 grams of powder per second).
- Key service components easily accessible through front and top.
- Easily removable side panels for complete access to service components.
- · High speed, heavy-duty whipper for complete product mixing.
- Front of machine access to tank drain, dump valves, auger and whipper motors and control board for easy service.
- · Key lock on the door prevents tampering.
- Contemporary styling for striking visual statement.
- Spring-loaded, all metal auger drive system for easy hopper installation.
- Front of machine set up and calibration.
- Top hinged, lift door model available.
- Preventive maintenance kit: 32906.0000.

 PMKIT

Additional features with iMIX Silver Series Plus

- Can be set as push and hold or single size portion control.
- Alphanumeric display allows adjustments and service operational testing from front of machine. Also communicates advertising messages, machine status and technical support contact information.
- · Iced Coffee display available.
- Preventive maintenance kit: 32906.0001.



For current specification sheets and other information, go to www.bunn.com.

Related Products


Easy Clear® EQHP-10 Product No.: 39000.0004

Easy Clear® EQHP-10L Product No.: 39000.0001



Features deluxe whipper chambers:

- 1. Robust whipper to ensure full flavor yield.
- 2. Specially designed self cleaning mixing chamber.
- 3. Exhaust fan to siphon off moisture that can cause powder buildup.
- 4. Hot water dispense for easy clean-out.
- 5. Quick disconnecting parts for thorough sanitizing.



Model	Agency Listing
iMIX-5S	NSF) a
iMIX-5S+	(NSE) .

Dimensions & Specifications

Model	Product #	Volts	Amps	Watts	Capacity	Cubic Measure	Shipping Weight	Cord Attached		
iMIX-5S	38100.0000	120	15	1800	4.5 gal/hr	16.37 ft ³	135 lbs	Yes*		
iMIX-5S	38100.0051	120	15	1800	4.5 gal/hr	16.37 ft ³	135 lbs	Yes*		
(Top hinged, lift door, Cappuccino display)										
iMIX-5S+	38100.0003	120	15	1800	4.5 gal/hr	16.37 ft ³	135 lbs	Yes*		
iMIX-5S+	38100.0050	120	15	1800	4.5 gal/hr	16.37 ft ³	135 lbs	Yes*		
(Top hinged, lift door, Cappuccino display)										
iMIX-5S+	38100.0010	120	15	1800	4.5 gal/hr	16.37 ft ³	135 lbs	Yes*		


(Iced Coffee display)

Burst Capacity: 68 - 12 oz. servings in 37 minutes. (to -10°F (-23.3°C) peak serving temperature)

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

Plumbing: 20-100 psi (138-690 kPa) from a 1/4" or larger supply line. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce it to 50 psi. Supplied with 1/4"

male flare fitting.

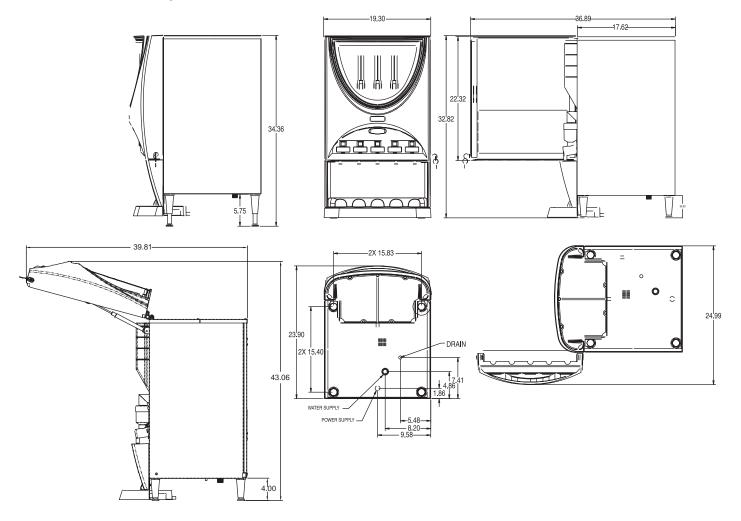

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

^{*}Power cord (NEMA 5-15P) 15 Amp-120V machine only. **Special order models available with door hinges on right side.