# ICB Twin SH PE, 120/240V SST W/ Wireless

32.8" x 23.0" x 21.9" (83.3cm x 58.4cm x 55.6cm)



- 4.3" Color Touchscreen aids in customizing recipes, brewing options and control
- The QWERTY key pad feature allows for easy customization of recipe names in English, Spanish and French
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- ICB Twin SH 53600.0100 is compatible with new Infusion SH servers, new TF 1.5-gallon ThermoFresh® Servers (with Base), all previous generations of TF 1.5-gallon TF Servers (with Base) and Titan® 1.5-gallon servers
- Customers can easily add up to 10 screensaver images to advertise and promote their brand and products
- Wireless Server monitoring
- USB port for easy programming
- Fast flow hot water faucet
- Stainless steel brew baskets provide durability and ease of cleaning
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- New Infusion Soft Heat® servers [sold separately] are ergonomic, lighter weight, energy efficient and now offer programmable recipe/ batch based holding times and temperatures, alerting staff when freshness has expired or server is empty

#### Agency:





### **Specifications**

Product #: 53600.0100 Faucet: Side

Water Access: Plumbed

Interface: Wireless
Finish: Stainless
Funnel: Black Plastic

#### **Additional Features**

### Legs: 4" Stainless Steel Legs

#### **Electrical & Capacity**

| Volts   | Amps | Watts | Cord<br>Attached | Plug Type | 8oz cups/hr<br>236ml cups/hr | Input H <sup>2</sup> O<br>Temp. | Phase | # Wires<br>plus Ground | Hertz |
|---------|------|-------|------------------|-----------|------------------------------|---------------------------------|-------|------------------------|-------|
| 120/240 | 25   | 6000  | Yes/             | -         | 280                          | 60°F (15.5°C)                   | 1     | 3                      | 60    |

### Plumbing Requirements

| - ramenig regardinesis |                      |                         |                           |  |  |  |  |
|------------------------|----------------------|-------------------------|---------------------------|--|--|--|--|
| PSI                    | kPa Fitting Supplied |                         | Water Flow Required (GPM) |  |  |  |  |
| 20-90                  | 138-621              | 3/8" Male Flare Fitting | 1.00                      |  |  |  |  |

### **CAD Drawings**


| 2D | Revit | KLC |
|----|-------|-----|
| •  |       |     |

Created on:

01/30/2019



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

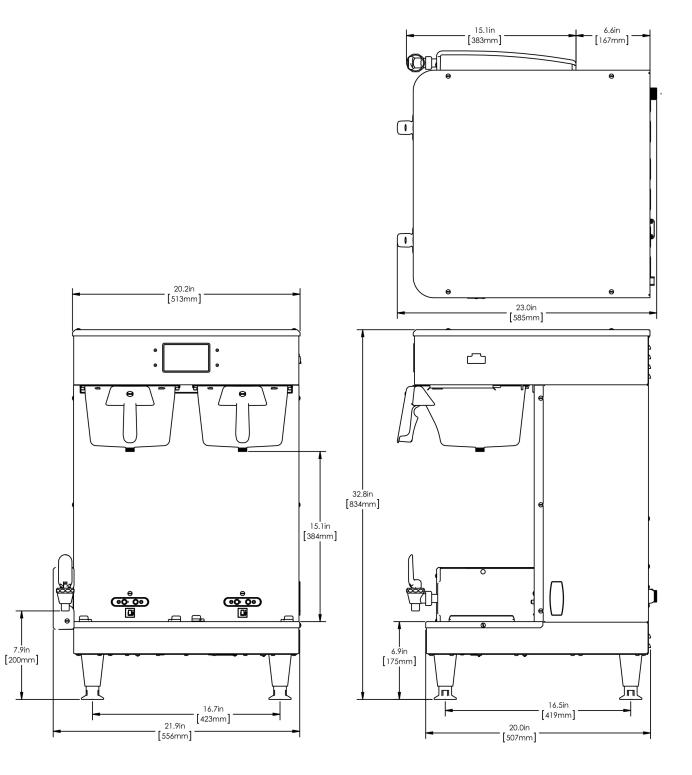

|         | Unit     |          |          |          | Shipping |          |             |            |  |  |
|---------|----------|----------|----------|----------|----------|----------|-------------|------------|--|--|
|         | Width    | Height   | Depth    | Width    | Height   | Depth    | Weight      | Volume     |  |  |
| English | 21.9 in. | 32.8 in. | 23.0 in. | 25.9 in. | 37.1 in. | 28.1 in. | 104.350 lbs | 15.626 ft³ |  |  |
| Metric  | 55.6 cm  | 83.3 cm  | 58.4 cm  | 65.8 cm  | 94.2 cm  | 71.4 cm  | 47.333 kgs  | 0.442 m³   |  |  |



### Related Products & Accessories: ICB Twin SH PE, 120/240V SST W/Wireless (53600.0100)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



1SH STAND, 120V INF SERIES

Product #: 27825.0200



2SH STAND, 120V INF SERIES

Product #: 27875.0200








KIT, DRIP TRAY INF TWIN SH

Product #: 53452.0000





# Serving & Holding Options: ICB Twin SH PE, 120/240V SST W/Wireless(53600.0100)



