ITCB-DV HV PE PRO, 120/208-240 V

Height: 35.0" Width: 10.0" Depth: 24.3" (88.9cm) (25.4cm) (61.7cm)



- Brew a variety of recipes between 100°-207° and ambient with on-demand temperatures
- Engineered to meet diverse beverage needs this is the all-in-one solution allowing users to seamlessly brew a variety of high-quality beverages
- Versatility meets quality in our innovative design, seamlessly integrates cuttingedge technology and user-friendly features
- Streamline your operation by maximizing output and minimizing effort engineered to deliver exceptional beverages to your customers
- The perfect solution for businesses that value both variety and space optimization
- SmartWAVE sprayhead technology creates an industry best uniformity of extraction for exceptionally smooth tasting coffee
- Includes both coffee and tea funnels
- Electronic funnel locks prevent removal of each brew funnel until drip through is complete
- Exclusive Peak Extraction sprayhead is multi-directional with a 17-hole design to ensure ultimate uniformity of extraction
- Includes integrated flip tray allows for brewing into thermal carafes and airpots
- Optional BUNNlink remote monitoring support (kit required)

Agency:





Specifications

Product #: 63000.0100 Funnel: Black Plastic Smart Funnel BrewWISE

Water Access: Plumbed
Interface: Wireless

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120	14.0	1700	Yes	NEMA 5-15P	79	60°F (15.5°C)	1	2	60
120/208	13	2650	-	N/A	135	60°F (15.5°C)	1	3	60
120/240	15	3500	-	N/A	183	60°F (15.5°C)	1	3	60

*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	1.25


CAD Drawings


Additional Features

2D	Revit	KLC		
•	•	•		

MARNING:





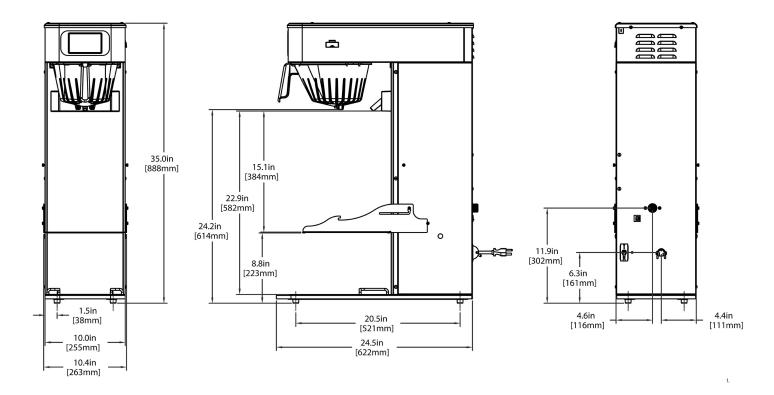

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	35.0 in.	10.0 in.	24.3 in.	38.1 in.	14.3 in.	32.3 in.	78.400 lbs	10.139 ft³
Metric	88.9 cm	25.4 cm	61.7 cm	96.8 cm	36.2 cm	81.9 cm	35.562 kgs	0.287 m³



Related Products & Accessories: ITCB-DV HV PE PRO, 120/208-240 V(63000.0100)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



INSTALLATION KIT, SCALE-PRO

Product #: 39000.0101



NON-LOCKING STAND ASSY, TF SERVER GEN3

Product #: 39795.0200



FUNNEL ASSY, SMART COFFEE BLK-CLEARED

Product #: 53463.00382



KIT, BUBBLE TEA

Product #: 54165.10182



STAND ASSY KIT, TF SERVER

Product #: 54473.1000



FUNNEL ASSY, SST INFUSION COFFEE

Product #: 54675.0008²



SYSTEM, WQ-55(2)5L

Product #: 56000.00011



SYSTEM, WQ-55(2)5

Product #: 56000.00041



SYSTEM, WEQ-10(1.5)5L

Product #: 56000.00241



SYSTEM, WEQ-10(1.5)5

Product #: 56000.00271



SYSTEM, WEQ-SCALE-PRO.X

Product #: 56000.00331



CARTRIDGE, WQ-55(2)5

Product #: 56000.01041



CARTRIDGE, WEQ-SCALE-PRO.X

Product #: 56000.01201



CARTRIDGE, WEQ-10 (1.5)5L

Product #: 56000.01211

1NSF Certified 2NSF Certified with spec sheet model listed 3NSF Certified under Solventum Purification 4NSF Certified under Mavea LLC 5NSF Certified under Zojirushi 6NSF Certified under Qins Inc 7NSF COMPONENT Certified



Related Products & Accessories: ITCB-DV HV PE PRO, 120/208-240 V(63000.0100)





Serving & Holding Options: ITCB-DV HV PE PRO, 120/208-240 V(63000.0100)



AIRPOT, 3.0L SST LA SINGLE PK

Product #: 32130.0000⁶ Mfr#:SVAP-3000F-N



AIRPOT, 3.0L SST LA 6/ CASE

Product #: 32130.0100⁶ Mfr#:SVAP-3000F-N



TDO-5, RESERVOIR

Product #: 34100.00011



TDO-4, RESERVOIR BREW THRU

Product #: 34100.00021



TDO-5, RESERVOIR, BREW THRU

Product #: 34100.00031



THERMAL CARAFE,ORN 1.9L 12PK

Product #: 36252.0000⁵ Mfr#:SH-DE19A



THERMAL CARAFE,ORN 1.9L 1PK

Product #: 36252.0001⁵ Mfr#:SH-DE19A

FE,ORN AIRPOT, 3.8L

AIRPOT, 3.8L SST LA SINGLE PK

Product #: 36725.0000⁶ Mfr#:SVAP-3800F-N



AIRPOT, 3.8L SST LA 6/

Product #: 36725.0100⁶ Mfr#:SVAP-3800F-N



TDO-N-3.5, RSVR

Product #: 39600.00011



TDO-N-4.0, RSVR BUNN

Product #: 39600.00021



TDO-N-3.5, W/BREW THRU LID

Product #: 39600.00811



TDO-N-3.5,RSVR W/ PINCHTUBE/BREW THRU LID

Product #: 39600.00831



TF SERVER, 1G DSG GEN3

Product #: 42700.02001



TF SERVER, 1G DSG GEN3 NOBASE

Product #: 42700.02501

Serving & Holding Options: ITCB-DV HV PE PRO, 120/208-240 V(63000.0100)



TF SERVER, 1.5G DSG GEN3

Product #: 42750.02001



TF SERVER, 1.5G DSG GEN3 NOBASE

Product #: 42750.02501



TD3T-N, RSVR BREW THRU LID BUNN

Product #: 43900.00011



TF SERVER, 1G MECH GEN3

Product #: 44000.02001



TF SERVER, 1G MECH GEN3 NOBASE

Product #: 44000.0250¹



TF SERVER, 1.5G MECH GEN3

Product #: 44050.02001



TF SERVER, 1.5G MECH NOBASE GEN3

Product #: 44050.02501

