



**EST-44/66**

High Temperature  
Low Temperature  
44"/66" Conveyor Dishwasher



Available as Right or Left.  
(must specify)



Available as Right or Left.  
(must specify)

**FEATURES:**

- **ENERGY STAR® Approved.**
- Automatic water control system.
- 249 racks / 996 covers per hour.
- Economical to operate. Uses only .49 gallons of water per rack of dishes.
- Single control switch activation.
- Power rinse heater system.
- Unique 3-stage (EST44) washing process provides wash, power rinse and final rinse all in a 44" machine.
- Unique 4-stage (EST66) washing process provides two wash stations, power heated rinse and final rinse all in a 66" machine.
- Automatic soil purging system filters wash water and traps plate debris into an external tray. Tray can be easily removed for cleaning.
- All stainless steel construction offers durable performance and years of trouble-free operation.
- Chemical resistant industrial heaters are proven to be more durable than commercial grade heaters.
- Large 19" opening accommodates larger items and utensils.
- Auto start/stop makes operation more energy efficient.
- Easy to remove and replace curtains for cleaning.
- Includes table limit switch and rack saver clutch system that protects the machine, dishracks and table from damage.
- Stainless steel chemical injection chamber.

**Available Options**

- Corner Feed Table (left or right must specify)  
**FACTORY INSTALLED ONLY**
- Vent Hood with 4" x 16" Vent and Damper Control (2 per set)
- Stainless Steel dishtables
- Drain Water Tempering Kit
- "E Temp" CMA booster heater(40° and 70° rise)  
**FACTORY INSTALLED ONLY**
- Hatco Booster Heater also available (specify voltage & phase)
- Scrap Trap Single Drain Connection Kit
- 208V-240V / 480V
- Sheet Pan Rack P/N: 1154.00
- 6" EXT height accommodates pots and pans and larger sheet pans
- Exhaust Fan Control
- **Note: E-Temp not available single phase 70° rise.**
- **Note: E-Temp standard voltage 208-230V three phase**







# EST-44/66

High Temperature  
Low Temperature  
44"/66" Conveyor Dishwasher

### WARNINGS:

- Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.
- Water hardness above 3 grains per gallon should be treated by a water softener. Failure to provide soft water (3g or less) will void the machine warranty.

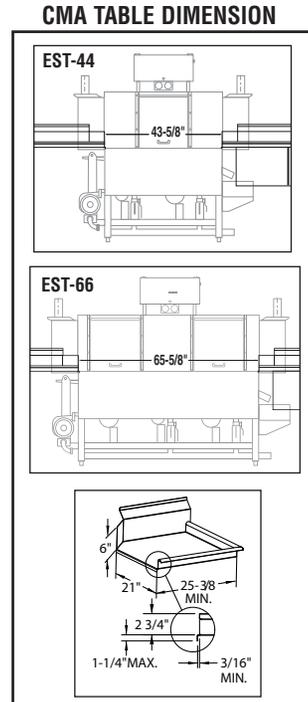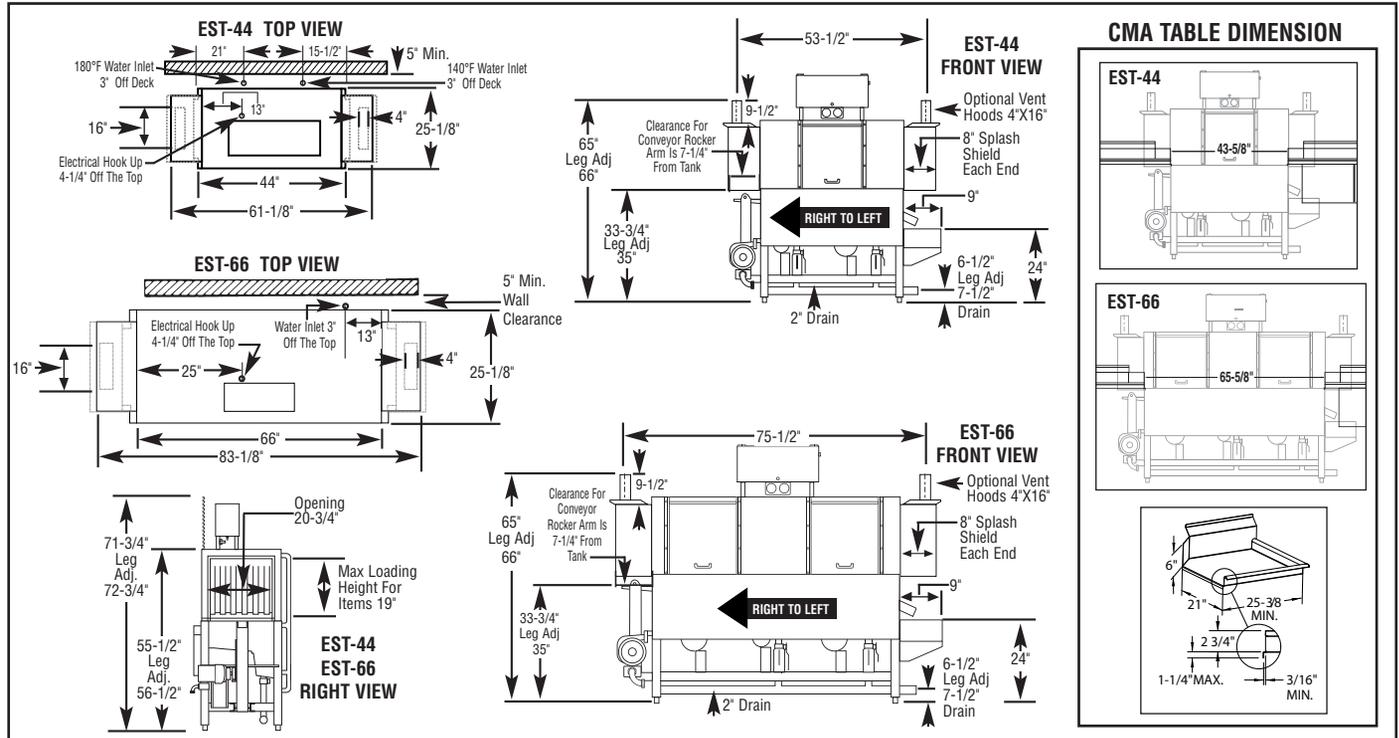

### Specifications:

MODEL EST-44/66 H/L	USA		METRIC	
<b>OPERATING CAPACITY</b> RACKS PER HOUR (NSF RATED) 243	243	243		
<b>CONVEYOR SPEED</b>	6.75 FT./MIN.	(206 CM/MIN.)		
<b>WASH PUMP MOTORS HP</b>	1	1		
<b>RINSE PUMP MOTOR HP</b>	1/3	1/3		
<b>CONVEYOR MOTOR HP</b>	1/8	1/8		
<b>WATER INLET - FILL</b>	1/2"	(1.27cm)		
<b>WATER INLET - FINAL RINSE</b>	1/2"	(1.27cm)		
<b>DRAIN SIZE</b>	2"	(5.1cm)		
<b>FINAL RINSE PRESSURE</b>	20 ± 5psi	(1.41 kg/cm <sup>2</sup> )		
<b>WASH TANK CAPACITY EST-44</b>				
PRE-RINSE	4.25 GAL	(16.0 L)		
WASH	11.75 GAL	(44.5 L)		
TOTAL	16.0 GAL	(60.5 L)		
<b>WASH TANK CAPACITY EST-66</b>				
PRE-RINSE	5.25 GAL	(20.0 L)		
WASH	13.25 GAL	(50.0 L)		
TOTAL	18.5 GAL	(70.0 L)		
<b>WASH PUMP CAPACITY</b>				
EACH	52 GPM	(197 LPM)		
<b>OPERATING TEMPERATURE EST-44/66</b>				
WASH	150°F-160°F	(66°C/71°C)		
PUMPED RINSE	160°F	(71°C)		
FINAL RINSE	180°F-195°F	(82°C/90°C)		
<b>OPERATING TEMPERATURE EST-44/66</b>				
WASH RECOMMENDED	140°F-150°F	(60°C/68°C)		
PUMPED RINSE RECOMMENDED	140°F-150°F	(60°C/68°C)		
FINAL RINSE RECOMMENDED	140°F-150°F	(60°C/68°C)		
<b>WATER CONSUMPTION</b>				
PER RACK (FINAL RINSE)	0.49 GAL	(1.8 L)		
PER HOUR (FINAL RINSE)	119 GPH	(450 LPH)		
<b>DIMENSIONS</b>				
DEPTH EST-44/EST-66	25-1/8"	(64cm)		
WIDTH EST-44	44"	(111.7cm)		
WIDTH EST-66	66"	(167.64cm)		
HEIGHT EST-44 / EST-66	55-1/2"-56-1/2"	(140.97-143.51cm)		
STANDARD TABLE HEIGHT EST-44/EST-66	34"	(86cm)		
MAX LOADING HEIGHT FOR ITEMS EST-44/EST-66	19"	(48cm)		
<b>STANDARD DISHRACK DIMENSIONS</b>	1	1		
	19-3/4"X19-3/4"	(50X50cm)		
<b>ELECTRICAL RATING</b>	<b>VOLTS</b>	<b>PHASE</b>	<b>AMPS (EST44)</b>	<b>AMPS (EST66)</b>
13kW @ 240V HEATER	208	1	68	76
13kW @ 240V HEATER	240	1	76	83
13kW @ 208V HEATER	208	3	53	56
13kW @ 208V HEATER	240	3	60	53
	480	3	24	26
<b>WASH TANK HEATER</b>	13kW @ 240V (3 PHASE), 13kW @ 208V (1 PHASE)			
<b>RINSE TANK HEATER</b>	3kW @ 240V			
<b>SPECIFY DIRECTION OF RACK TRAVEL (RIGHT TO LEFT, LEFT TO RIGHT) WHEN ORDERING</b>				
<b>EST-44H/EST-66 EXHAUST VENTILATION REQUIREMENTS AT 100% CAPACITY CFM</b>				
ENTRANCE END 200 MAX	DISCHARGE END 400 MAX	TOTAL CFM 600 MAX		
<b>SHIPPING WEIGHT</b>				
APPROXIMATE EST-44	662#	(300kg)		
APPROXIMATE EST-66	750#	(340kg)		

### Summary Specifications: Model EST-44 / EST-66 Conveyors

The Models EST-44H/ EST-66H high temperature and EST-44L / EST-66L Chemical Sanitizing conveyor dishwashers meets ETL sanitation, UL, and CUL construction standards. The EST-44 / EST-66 performs three separate washing functions including a built-in power rinse, all in a 44" or 66" space. The EST-44 / EST-66 washes up to 243 racks per hour and uses a minimum .49 gallons of water per rack while achieving sparkling, clean, dry dishes. Constructed entirely of stainless steel.

Call For Available Models (800-854-6417 or See web-Site: [www.cmadishmachines.com](http://www.cmadishmachines.com))

**Advisory:** CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.



CMA Dishmachines 12700 Knott Street Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • [www.cmadishmachines.com](http://www.cmadishmachines.com)

CMA reserves the right to modify specifications or discontinue models without prior notification.