




UC65e

High Temp Undercounter
Dishwasher And
Glasswasher

FEATURES:


- **Energy Star Qualified.**
- 30 racks / 120 covers per hour.
- Fully automatic cycle for easy operation.
- Built-in detergent and rinse chemical pumps.
- Pump drain system allows for multiple installation applications including elevated drains.
- Safety Temp feature assures 180°F sanitizing rinse every cycle.
- Built-in 4kW booster heater.
- 2kW wash tank heater.
- Counter-balanced double skin door.
- Low 0.8 US gal. water usage per rack.
- Door safety switch, extended wash cycle switch.
- Stainless steel safety filters protect wash pump.
- Top mounted detergent and rinse-aid prime switches.
- Operator friendly, removable stainless steel wash and rinse arms allows for easy cleaning.
- (1) peg and (1) flat bottom rack supplied.

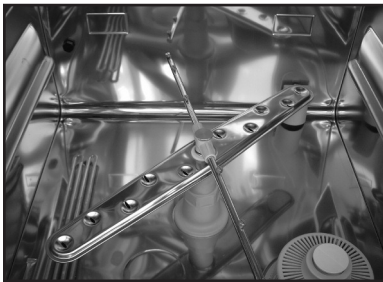

Upper and lower wash and rinse arms guarantee excellent results.



Uses standard 19-3/4" X 19-3/4" racks.

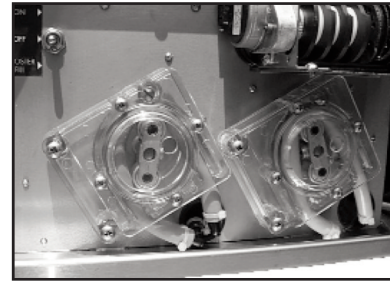

Built-in detergent and rinse chemical pumps.



Top mounted controls are easy to read and simple to operate.

**CMA
MIZER®**
Registered Trademark






UC65e

High Temp Undercounter
Dishwasher And
Glasswasher

WARNINGS:

- Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.
- Water hardness above 3 grains per gallon should be treated by a water softener. Failure to provide soft water (3g or less) will void the machine warranty.

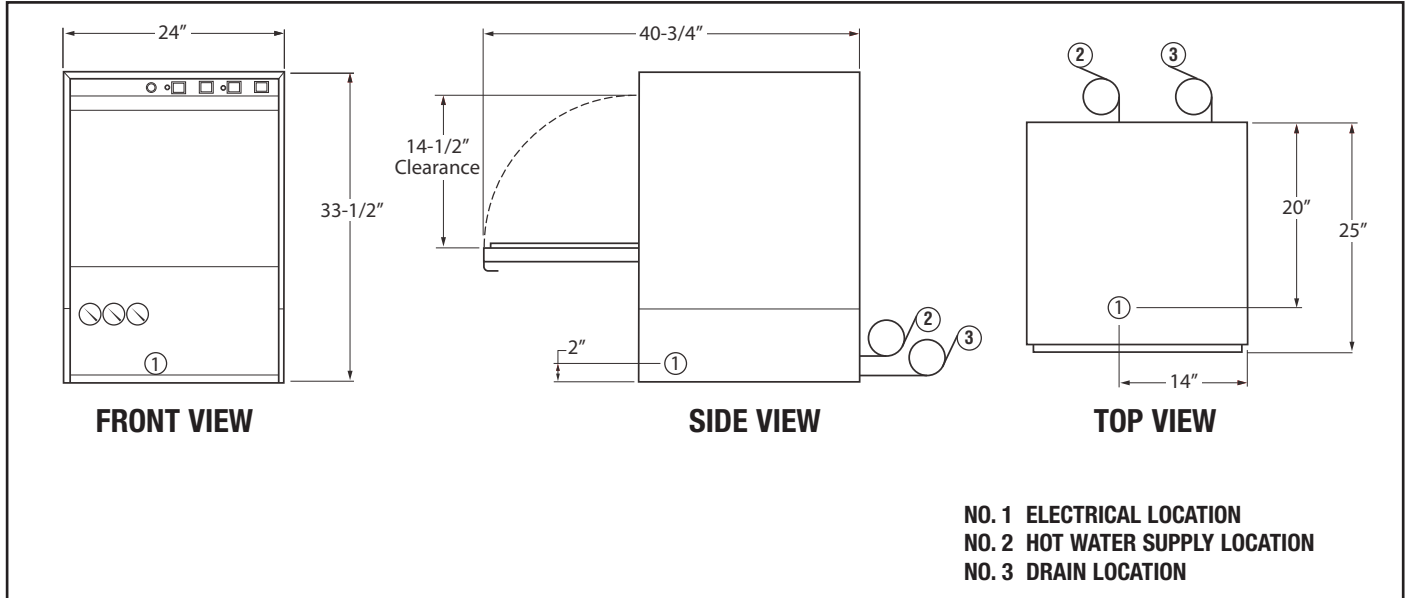

Specifications:

MODEL UC65e	USA	METRIC		USA	METRIC		
WATER CONSUMPTION			FRAME DIMENSIONS				
PER RACK	.8 GAL	(3.2 L)	DEPTH	25"	(63.5 cm)		
PER HOUR	20.4 GAL	(64 L)	WIDTH	24"	(60.9 cm)		
OPERATING CYCLE			HEIGHT	33-1/2"	(85.1 cm)		
			MAX HEIGHT CLEARANCE FOR DISHES	14-1/2"	(36.8 cm)		
			STANDARD DISHRACK			1	1
			DIMENSIONS	19-3/4"X19-3/4"	(50X50CM)		
			SHIPPING WEIGHT			148#	67KG)
OPERATING CAPACITY			FRONT LEVELING FEET PROVIDED				
RACKS PER HOUR	30	30	MOTOR				
WATER REQUIREMENTS			1HP				
			HEATERS				
			WASH TANK HEATER	2kW			
			BOOSTER HEATER(40°F/22°C rise)	4kW			
			ELECTRICAL RATING*			VOLTS	PHASE
WATER CONNECTION (flexible hose)	1/2" I.D.	(60°C)	208	1	22		
(supplied)			230	1	24		
DRAIN CONNECTION (6 ft. flexible hose)	3/4" I.D.		<div><div>*THIS SYSTEM REQUIRES THREE POWER WIRES WHICH INCLUDES A CURRENT CARRYING NEUTRAL. AN ADDITIONAL FOURTH WIRE MUST BE PROVIDED FOR MACHINE GROUND.</div><div><div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div><div>115V</div><div>208-240V</div><div>115V</div></div><div><div>L1</div><div>L2</div><div>N</div><div>G</div></div></div></div>				
(supplied)							
FLOW PRESSURE (PRV supplied)	18-22 PSI	1.2-1.5 kg/cm²					
CYCLE TEMPERATURES							
WASH (minimum)	150°F	(66°C)					
RINSE (minimum)	180°F	(82°C)					

Summary Specifications:

Specified unit will be a CMA model UC65e undercounter high temperature sanitizing dishmachine with built-in booster heater. Features include large 14-1/2" door opening clearance, standard liquid detergent and rinse-aid dispensing pumps, top, side and rear panels. Unit has standard pump drain, "Safe-T-Temp" feature to ensure proper 180°F final rinse temperature and stainless steel rinse arms with removable end caps for easy cleaning.

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.

CMA
MIZER
 Registered Trademark

