

COOK-N-HOLD LOW TEMPERATURE SMOKER OVEN MODEL 1000CHSK1EX

FEATURES AND BENEFITS:

- Fully insulated Cook-N-Hold smoker oven designed for flavorful results by slow cooking. Slow cooking means 15% to 20% less shrinkage.
- Smokes with real wood chips. Cold smoke fish and cheese as well with Kold Keepers.
- Efficient 3000 Watt power unit allows for reheating of prepared meals or bulk items. Maximum temperature 350°F (176°C). Powerful 250 Watt cal rod heats chips quickly.
- Includes stainless steel vented chip box and variable one hour timer for mild to heavy smoke flavor.
- A user-friendly solid-state control with large, high-resolution touchscreen display to ensure holding at precise food temperature.
 - 6.8", high-resolution, glove-safe, high-impact, capacitive touchscreen interface.
 - Large, easy-to-read time/temperature displays.
 - Shelf timers.
 - HACCP data collection with date/time stamp
- 6" meat probe.
- Cook and hold over 120 lbs. (54 kg.) of meat in just 5 sq. ft. of floor space.
- Fully insulated, stainless steel interior and exterior for ease of cleaning. Smooth interior coved corners prevent food particle/grease buildup.
- Oven is operable on either 208 or 240 Volt circuits at the flip of a switch.
- Field reversible insulated door prevents temperature loss. Silicone door gasket for proper seal. High temperature ceramic magnetic latch for "easy open" and security during transport.
- Safety conscious anti-microbial latch protect against spreading germs. Standard with right hand hinges; left hand hinging available upon request.
- Removable stainless steel pan slides hold eight (8) 18" x 26" pans on 3" centers. Supplied with 3 wire grids.
- Heavy duty 5" casters, two swivel with brakes, two rigid. Provides mobility when fully loaded.
- Ovens can be stacked for flexibility.
- Cres Cor recommends soaking wood chips for a minimum of 24 hours before usage.

POWER UNIT OPTIONS:

3000 Watts, 208/240 Volts, 1 Phase, 60 Hz.

3000 Watts, 208/240 Volts, 3 Phase, 60 Hz.



1000CHSK1EX




- HACCP data collection with date/time stamp
 - Shelf timers • Programmable recipes
 - One-Touch button recipes

ACCESSORIES and OPTIONS (Available at extra cost):

- ☐ Optional 3" food probe
- ☐ Kold Keeper
- ☐ Stacking Kit
- ☐ Tempered Glass Door Window
- ☐ Key Lock Latch
- ☐ Extra Wire Grids
- ☐ Perimeter Bumper
- ☐ Corner Bumpers
- ☐ Various Caster Options
- ☐ 120 Volt Service
- ☐ Mobile Equipment Stand 24"

1000CHSK1EX

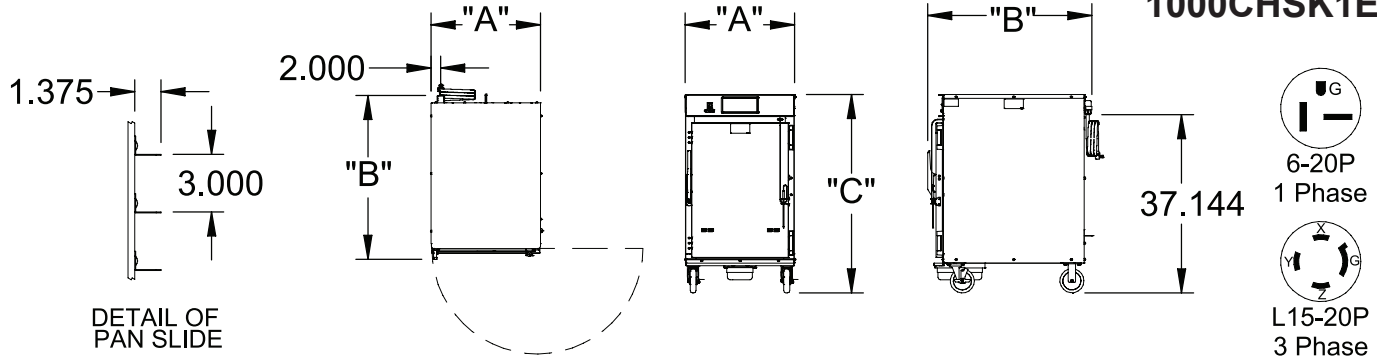

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE CLEAR DIMENSIONS*				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
1000CHSK1EX	8	18 X 26	IN	22-13/16	34-1/8	41-5/16	18-3/16	27	25	LBS	220
		460 X 660	MM	580	867	1049	465	690	635	KG	100
1000CHSKSTKEX	16	18 X 26	IN	22-13/16	34-1/8	76-1/2	18-3/16	27	25	LBS	441
		460 X 660	MM	580	867	1943	465	690	635	KG	200

*Inside dimensions for each compartment

When adding bumpers, Add 3-11/16" to Dim "A" and 3/8" to Dim "B"

CABINET:

- Outer Body: 22 ga. stainless steel.
- Inner body: 18 ga. stainless steel.
- Reinforcement: Internal framework of 16 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F, 1-1/2" in walls, 1" in doors.
- Drip pan: 18 ga. stainless steel with drain; removable.
- Wood chip box (removable): 18 ga. stainless steel; 3-5/8" L x 8" W x 2-1/4" H with 8" long handle; mounts on lower rear wall.
- Casters: 5" dia., modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front swivel casters equipped with brakes; rigid casters on rear.

DOOR:

- Field reversible.
- Formed 20 ga. stainless steel.
- Latch: Anti-microbial chrome plated zinc with composite handle, ceramic magnetic type; mounted inboard.
- Hinges (2): Heavy duty chrome plated zinc; mounted inboard
- Gaskets: Perimeter type, silicone.
- Adjustable vents.

PAN SLIDES (removable):

- 18 ga. stainless steel angles, 1 x 1-3/8; riveted on 3" centers.
- Grids: Stainless steel, 18 x 26; supplied with (3) grids.

CLEARANCE REQUIREMENTS:

- 3" (76mm) at the back, 2" (51mm) at the top, 1" (25mm) at both sides.

POWER REQUIREMENTS:

- 3000 Watts, 208/240 Volts, 60 Hz., 1 phase, 20 Amp. Service 14.4 Amps at 208 Volts, 12.5 Amps at 240 Volts.
- 3000 Watts, 208/240 Volts, 60 Hz., 3 phase, 20 Amp. Service 8.3 Amps at 208 Volts, 7.2 Amps at 240 Volts.



Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Customer Service.

If you need a QR reader visit your App Store on your Smartphone or Tablet.

CRES COR

5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRES COR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2026 All rights reserved.



WARRANTY
2-Year Parts,
1 Year Labor

ELECTRICAL COMPONENTS:

- Temperature Control with:
 - 6.8" high-resolution, glove-safe, high impact, capacitive touchscreen interface.
 - Programmable recipes
 - One-Touch button recipes
 - Shelf timers
 - HACCP data collection
 - Temperature range: 135°F (57°C) to 350°F (176°C).
- USB port with cover.
- Switch: ON-OFF rocker type
- Solid-state relays (2)
- Power cord: Permanent, 6 ft., 12/3 ga., with right angle plug.
- Three (3) heater circuits.
- One (1) Smoker Heating Element
- Voltage selector switch: Change to 208 or 240 Volt; on back of oven.

INSTALLATION REQUIREMENTS:

- This model complies with section 59 of UL710B for emissions of grease laden air, and according to UL is not required to be placed under a ventilation hood. Check local requirements before installation.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Smoker Oven Model 1000CHSK1EX; Touchscreen; Solid state electronic controlled times and temperatures. Outer body of 22 ga. stainless steel; inner body and top of 18 ga. stainless steel. Fiberglass insulation 1-1/2" in walls; 1" in door. Stainless steel internal frame; coved corners. Anti-microbial chrome plated latch. Three (3) heated inner walls. Smoker box. Removable pan supports for (8) 18" x 26" pans spaced on 3" centers. Casters" 5" modulus casters (2) swivel, (2) rigid, Delrin bearings. Load capacity 250 lbs. each. 2-Year Parts / 1-Year Labor warranty. Lifetime on heating elements (excluding labor). Provide the following accessories: _____ CSA Sanitation and safety certified US & CAN.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Made in America Since 1936