


**CORRUGATED SIDEWALL  
ROLL-IN REFRIGERATOR RACKS  
208 SERIES  
(FOR 12" X 20" PANS)**

**FEATURES AND BENEFITS:**

- Durable rack specifically designed to fit roll-in or pass through refrigerators, freezers, and warming cabinets; eliminates unnecessary product handling while maintaining proper temperature levels. Holds 12" x 20" pans.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Stainless steel sidewalls resist pan damage.
- Perforated corrugations on 3" centers allow for air circulation.
- Inboard heavy duty 5" swivel casters, two with brakes. Wheel placement permits easy "in-and-out" of roll-ins.
- Two styles available; Custom (C) or Deluxe (D). Deluxe includes perimeter bumper and enclosed base.
- Verify height of cabinet door opening before ordering.

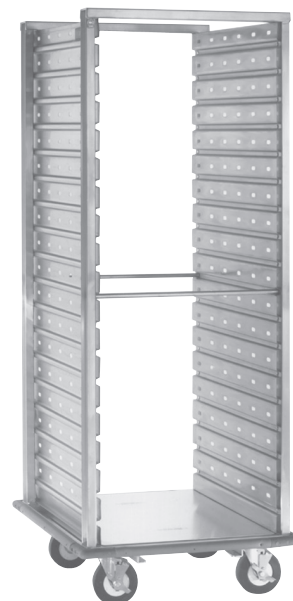

208-1240-D




**ACCESSORIES and OPTIONS  
(Available at extra cost):**

- ☐ Pan Stop
- ☐ Corner Bumpers
- ☐ Vertical Bumpers
- ☐ Various Caster Options




See page G-36 for accessory details.



## 208 Roll-In Series (12" x 20" pans)



DETAIL OF  
PAN SLIDE



INBOARD CASTER PLACEMENT

### CUSTOM ("C")

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
208-1240-C	38	12 x 20 x 2-1/2	IN	23-11/16	25-1/8	69	21-1/16	24-3/8	60-1/2	LBS	80
		305 x 510 x 63	MM	605	640	1755	535	620	1540	KG	36

### DELUXE ("D")

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
208-1240-D	38	12 x 20 x 2-1/2	IN	25-9/16	27	69	21-1/16	24-3/8	60-1/2	LBS	85
		305 x 510 x 63	MM	650	690	1755	535	620	1540	KG	39

ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.



Gold indicates our Best Rack with the best warranty in the industry.  
3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

#### RACK:

- Posts: Extruded aluminum channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded aluminum channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (2): 5/16 dia. steel rods enclosed in aluminum tubing; fastened to posts.
- Sides: 22 ga. 304 stainless steel perforated corrugations riveted to posts.
- Bolsters: Formed .190 aluminum; welded to posts, casters attached.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

#### DELUXE ("D") MODELS:

- Base plate: One piece .063 aluminum.
- Bumper: 1" wide gray rubber, perimeter type.

#### PAN SLIDES:

- Corrugations act as pan slides on 3" centers.

#### SHORT FORM SPECIFICATIONS

Cres Cor Roll-In Refrigerator Rack Model 208-1240- (C) or (D). Frame of extruded aluminum welded construction. Tie rods (2) applied at front and rear. 22 ga. 304 stainless steel no-tip corrugated sides for (38) 12" x 20" pans on 3" centers. Inboard 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F.

☐ Custom Model (C)

☐ Deluxe Model (D) has .063 aluminum base plate; perimeter bumper.

3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories: \_\_\_\_\_ . NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2011 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.